rainco



TIMELESS DESIGN, EFFORTLESS FUNCTIONALITY

BASIN OVERFLOW POP UP WASTE

AT A GLANCE

BEST FOR

Overflow basins

FEEL


Smooth push action gives you a consistent open and close every time

INSTALLATION

Fits Basin Hole: Between 40mm and 48mm

rainco

Front View · Side View

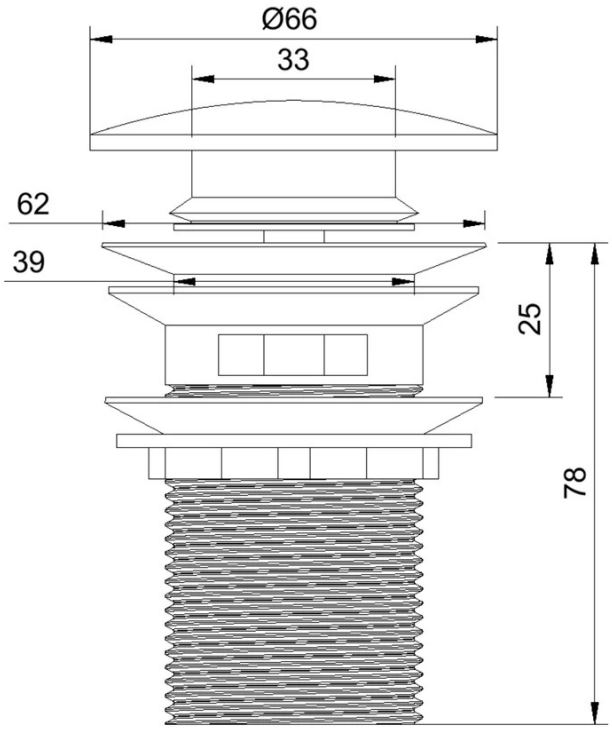

Specifications

MATERIAL

Lead-free Solid Brass

CONNECTIONS

G1-1/4” (32mm)

DIMENSIONS

Waste Thread height **78 mm** · Waste cap diameter **Ø66 mm**

What’s in the box

INCLUDED

1x	Basin Pop Up Waste
1x	Waste Cap
3x	Rubber Washers
1x	Metal Washer

Finish Options


Antique Brass	Brushed Nickel	Brushed Brass	Brushed Copper	Gun Metal
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Prepare Waste

Remove the fixing nut, friction washer and rubber sealing washer from the waste body.


02



Install the Waste Body

Ensure the overflow openings in the waste body align with the basin's overflow channel.


03



Secure and Connect

From below the basin, fit the rubber sealing washer, friction washer and fixing nut.

04



Test the Installation

Check the waste connection and overflow system for correct drainage and leaks.

FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the waste is fully tested.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4