



SIMPLE FORM, LASTING IMPRESSION

HAVEN BATH SPOUT

AT A GLANCE



BEST FOR

Everyday bathrooms
for those who value
simplicity with
substance




FEEL

Smooth and Steady



INSTALLATION

Wall-mounted,
plumber required

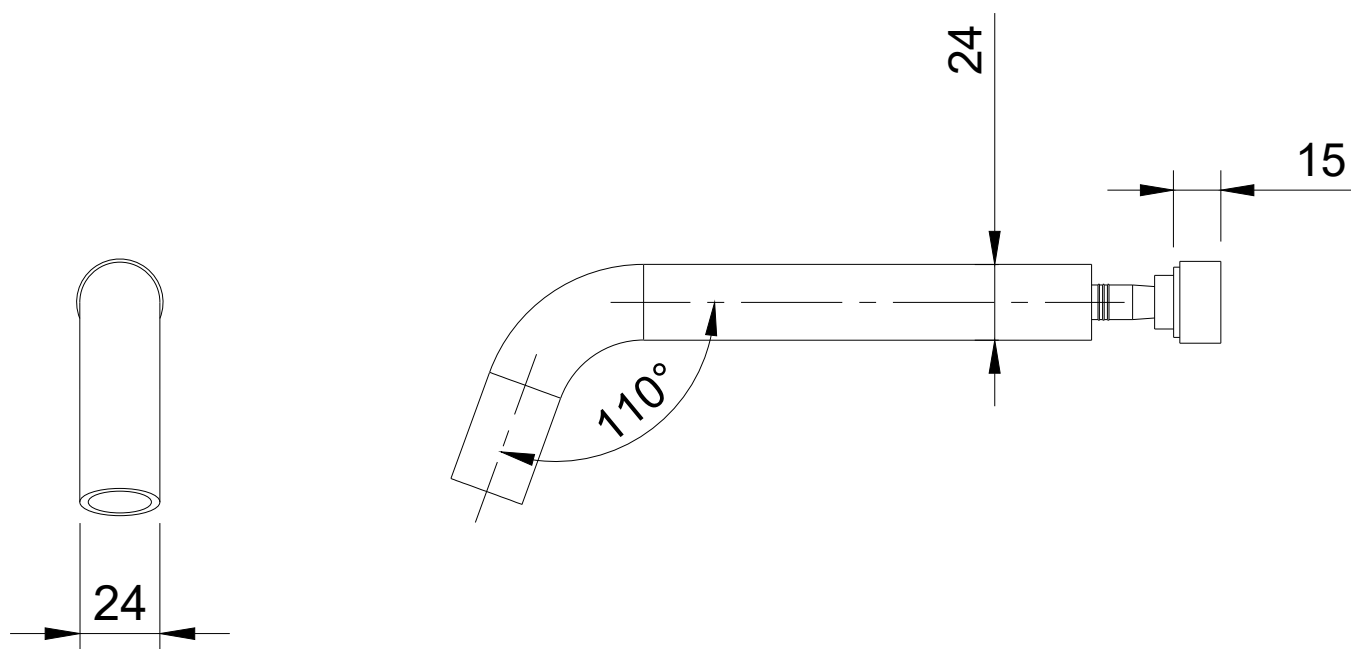

Specifications



MATERIAL

Solid **DZR** Lead-free Brass



FLOW RATE

8 L/min · WELS 3 Star



PRESSURE RANGE

150–500 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Wall-mounted · cut-out **Ø25 mm**



DIMENSIONS

Spout diameter **Ø24 mm** · thickness **12 mm**

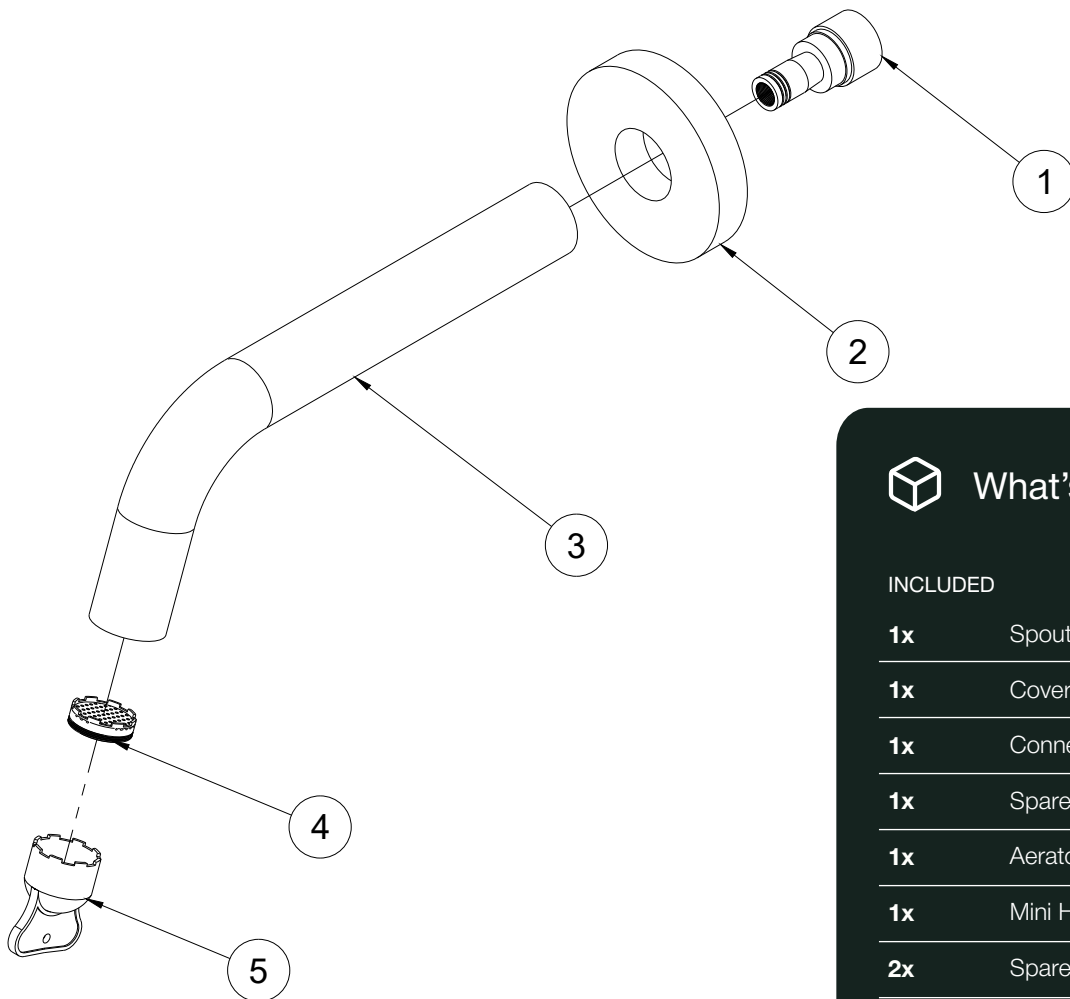

What's in the box

INCLUDED

1x	Spout
1x	Cover Ring
1x	Connection Screw
1x	Spare Aerator
1x	Aerator Remover Tool
1x	Mini Hex Wrench
2x	Spare Grub Screws

EXPLODED VIEW

- ① Connection Screw
- ② Cover Ring
- ③ Spout
- ④ Aerator
- ⑤ Aerator Remover Tool

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Check Outlet

Confirm that the wall outlet has a standard G1/2 connection and that the tile cut-out is greater than Ø25 mm.


02

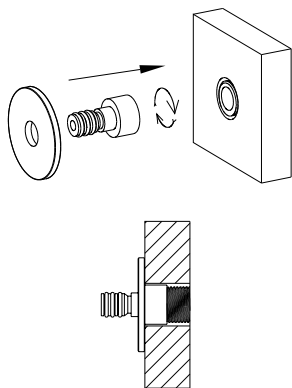

Install Connection

Position the cover ring first. Screw the connection fitting into the G1/2 wall outlet and tighten it securely.


03



Attach Spout

Slide the spout body onto the installed connection. Align the spout correctly, then tighten the grub screw using the mini hex wrench.

04



Check Installation

Confirm that the spout is secure, correctly aligned and sitting flush against the finished wall.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the spout has been fully tested and confirmed leak-free.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

3 STAR · 8 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4