



SMOOTH AND CONTROLLED WATER FLOW

SERENO MINIMAL WALL BASIN MIXER TAP

AT A GLANCE



BEST FOR

Everyday bathrooms
for those who value
space, flow and
detail






FEEL

Precise temperature and
flow control



INSTALLATION

Wall-mounted,
plumber required

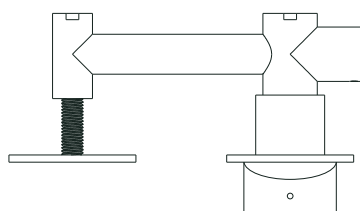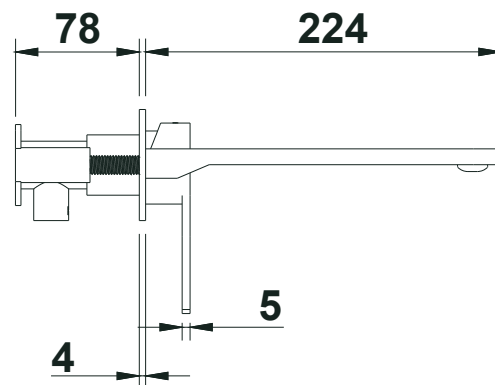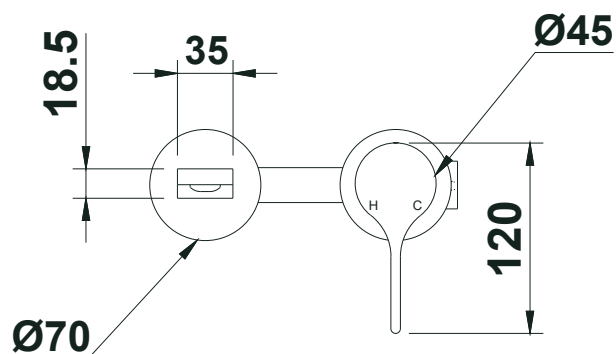

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic cartridge · **Ø35 mm**



FLOW RATE

4.5 L/min · WELS 6 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**



MOUNTING

Wall-mounted · cut-out **45mm** · taphandle **22mm**



DIMENSIONS

Diameter **70 mm** · spout **224 mm** · handle **Ø45 mm** · spout **Ø22 mm**



INCLUDED

1x Mini Hex Wrench

- 1 In-wall Body
- 2 Fixing Screws
- 3 Spout Connector Screw
- 4 Cover Rings
- 5 Temperature Control Handle
- 6 Spout
- 7 Grub Screws

© 2007 Pearson Education, Inc.

100%


10/10/2019

Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Install in-wall body

Install the in-wall mixer body into the proposed wall position. Connect hot and cold water pipework to the body inlets.


02



Prepare wall openings

Ensure the wall openings are cut to the correct size before final finishing.


03



Complete wall finish

Do not seal or tile until the product has been fully tested. Once testing is successful, complete the wall finish or tiling.

04



Install trim and handle

Fit the cover rings, install the spout and handle, then secure using the grub screws with the supplied Allen key.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

6 STAR · 4.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4