
rainco

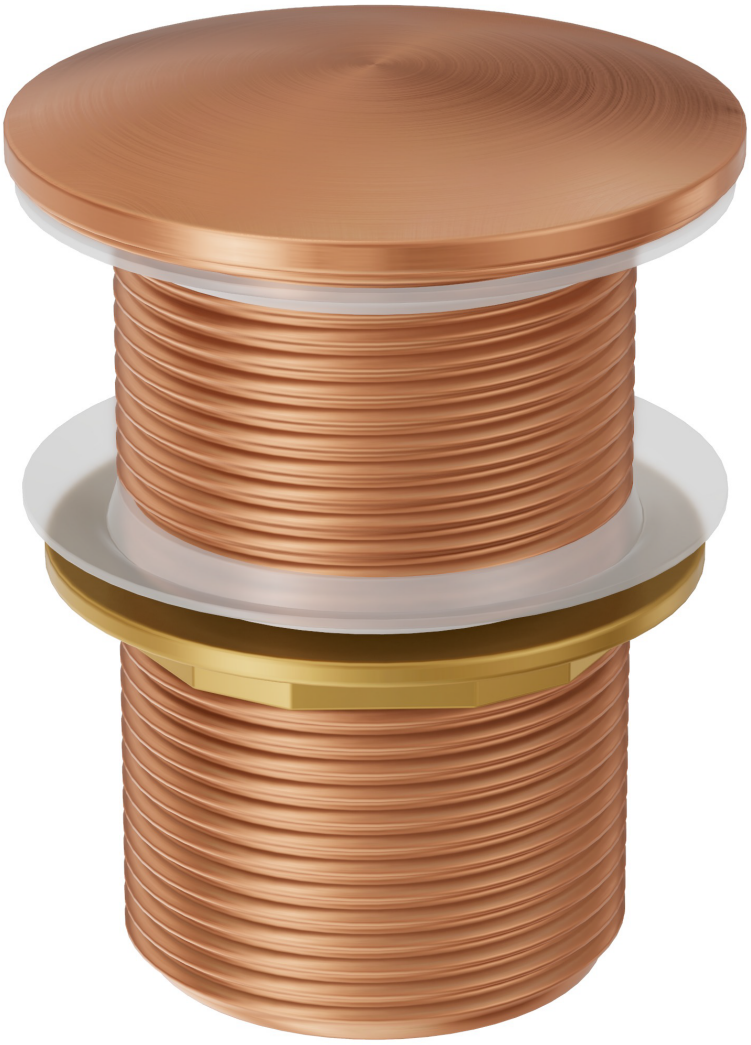

PRESS. SEAL. RELEASE.


# BATH POP-UP WASTE

AT A GLANCE

| BEST FOR | MATERIAL | INSTALLATION |
| --- | --- | --- |
| Bathroom tubs | Crafted from Stainless Steel 304 | For non-overflow baths |

rainco

Front View · Side View

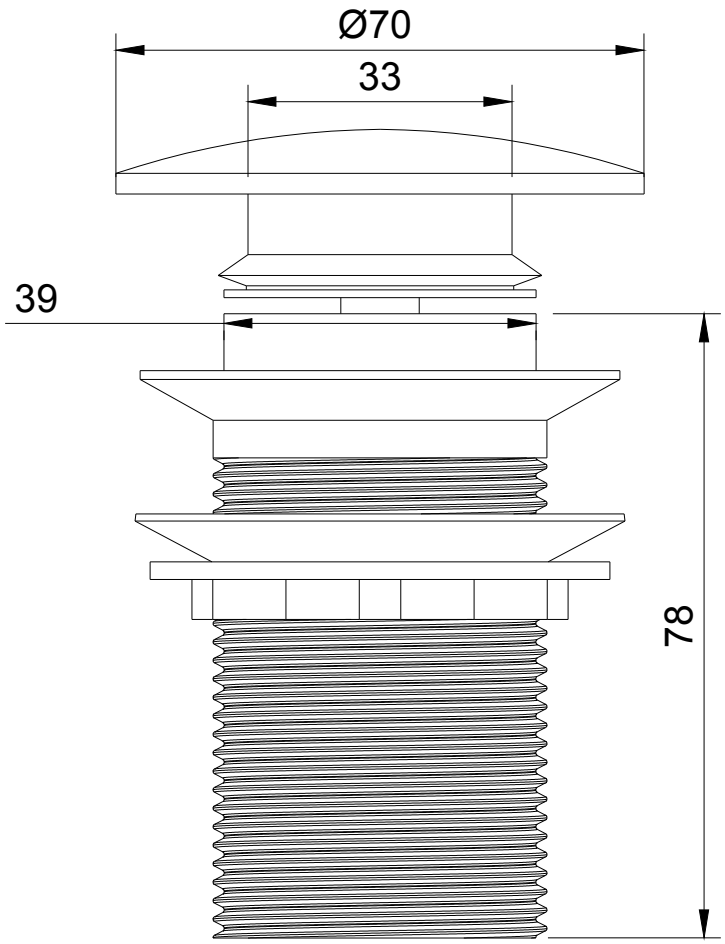


## Specifications

MATERIAL

Stainless **304** Steel

CARTRIDGE

-

FLOW RATE

**-**

PRESSURE RANGE

**50–800 kPa**

TEMPERATURE

**4–80 °C**

CONNECTIONS

Standard **G1-1/2" – Ø40 mm**

BATH HOLE


Between **45 mm** & **55 mm**

DIMENSIONS

Overall height **80 mm** · Diameter **Ø70 mm**

rainco

# Exploded View

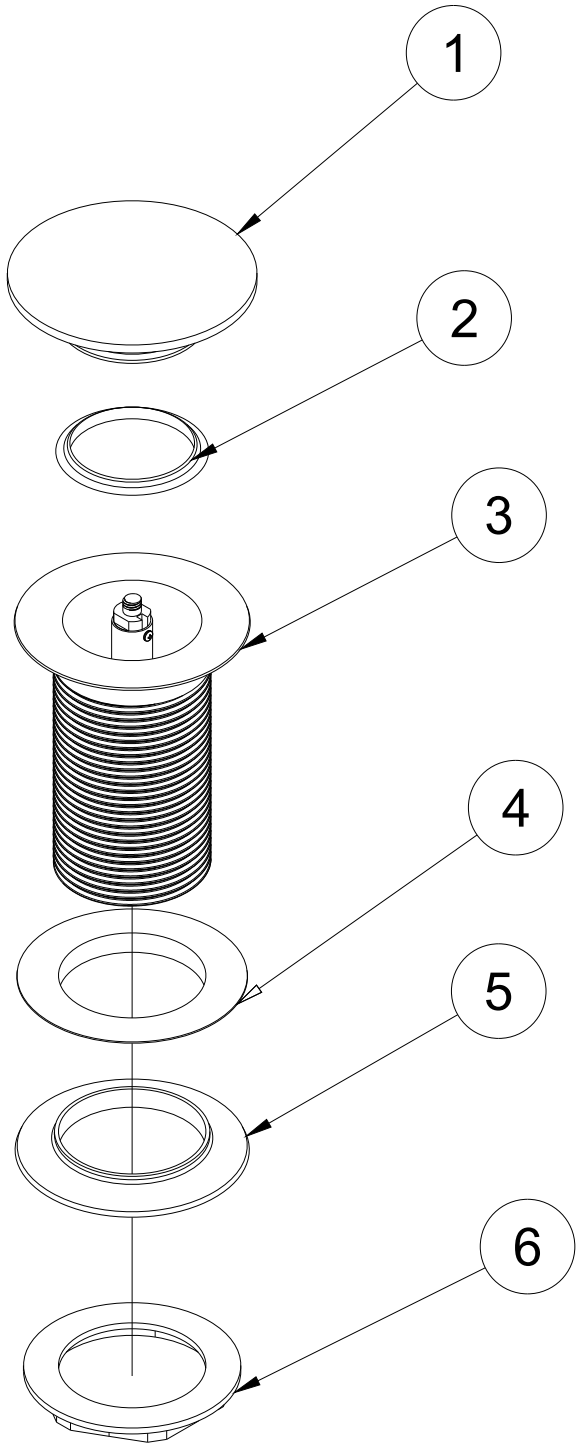


## What's in the box

INCLUDED

| | |
|---|---|
| **1x** | Pop-Up Waste |
| **1x** | Fixing Nut |
| **2x** | Fixing Screws |
| **1x** | Installation Instructions |

EXPLODED VIEW

1. Pop-Up Stopper Cap
2. Stopper Sealing Ring
3. Waste Body and Flange
4. Friction Washer
5. Fixing Nut

## Finish Options


| **Antique Brass** | **Brushed Nickel** | **Brushed Brass** | **Brushed Copper** | **Gun Metal** |
|---|---|---|---|---|
| AEA | AEA | PVD | PVD | PVD |

rainco

# Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



**Prepare the waste**

Remove the fixing nut, friction washer and rubber sealing washer from the waste body.
Keep the stopper and internal mechanism assembled.


02

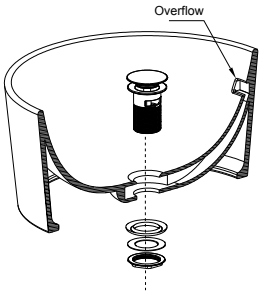


**Install the waste body**

Insert the waste body through the basin opening. Ensure the overflow openings in the waste body align with the basin's overflow channel.


03

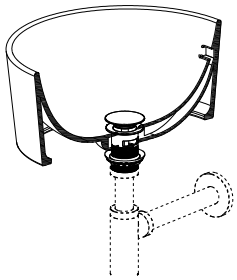

**Secure and connect**

From below the basin, fit the rubber sealing washer, friction washer and fixing nut. Tighten evenly, then connect the waste outlet to the trap.

04

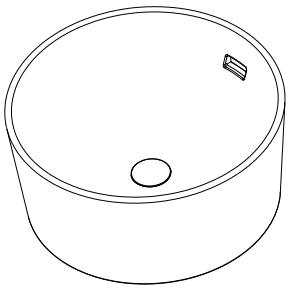

**Test the installation**

Operate the pop-up stopper and fill the basin. Check the waste connection and overflow system for correct drainage and leaks.

**FINAL CHECK · TURN ON & TEST**

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

## Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

## Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

-

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4