
rainco

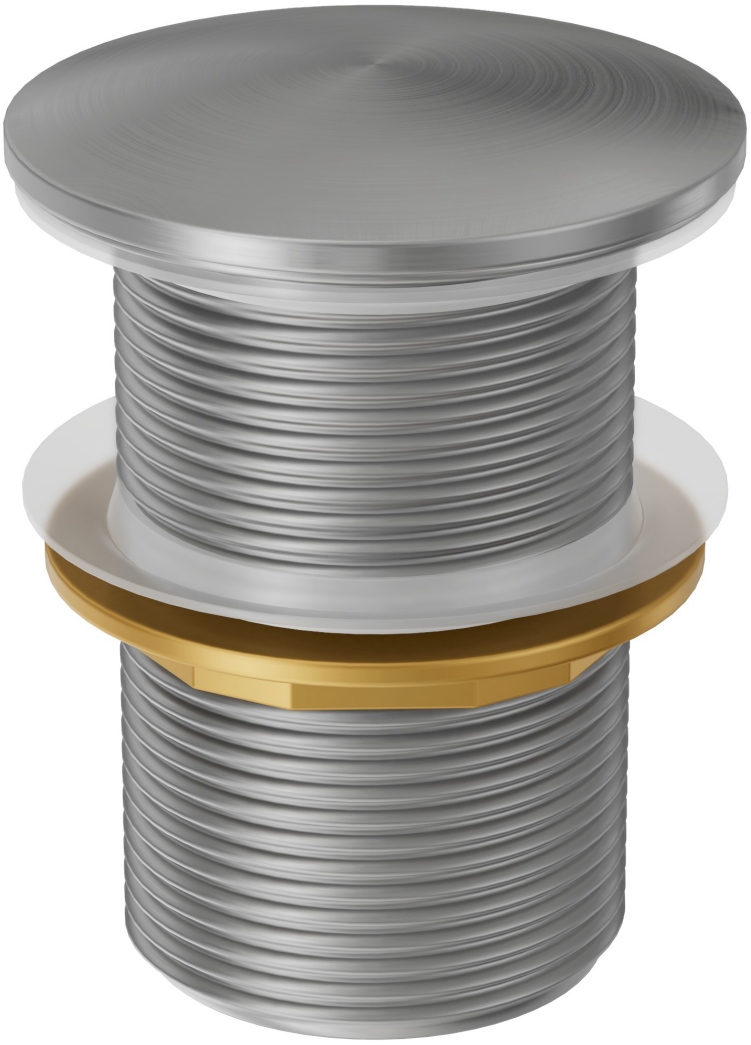

PRESS. SEAL. RELEASE.


BATH POP-UP WASTE

AT A GLANCE

BEST FOR	MATERIAL	INSTALLATION
Bathroom tubs	Crafted from Stainless Steel 304	For non-overflow baths

rainco

Front View · Side View

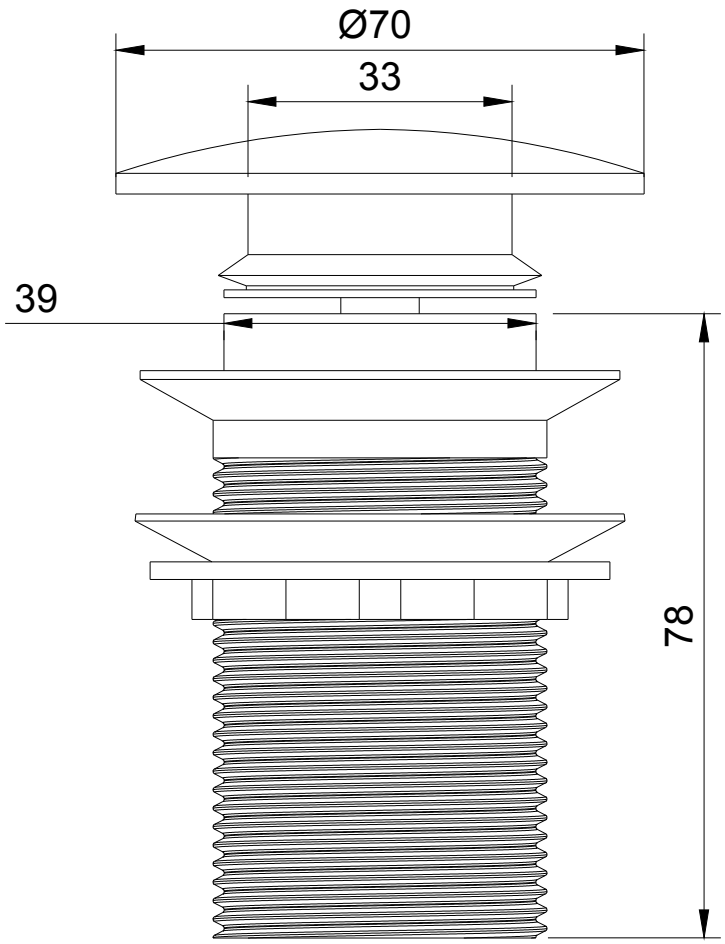

Specifications

MATERIAL

Stainless **304** Steel

CARTRIDGE

-

FLOW RATE

-

PRESSURE RANGE

50–800 kPa

TEMPERATURE

4–80 °C

CONNECTIONS

Standard **G1-1/2" – Ø40 mm**

BATH HOLE


Between **45 mm** & **55 mm**

DIMENSIONS

Overall height **80 mm** · Diameter **Ø70 mm**

rainco

Exploded View

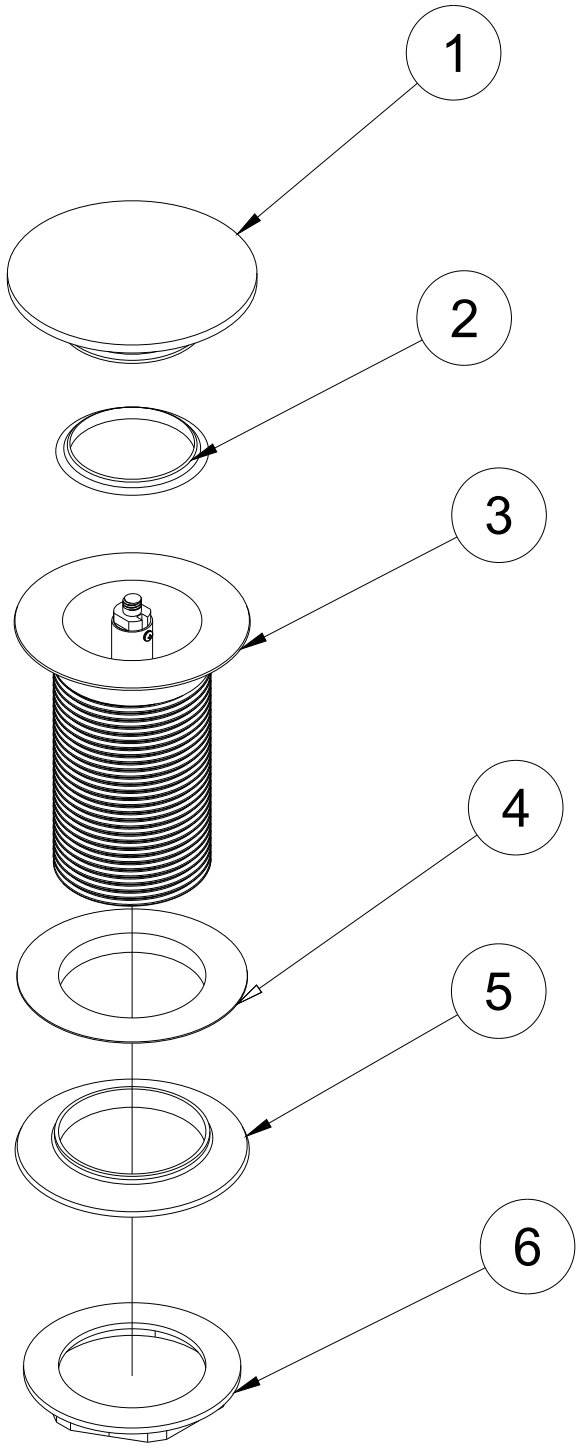

What's in the box

INCLUDED

1x	Pop-Up Waste
1x	Fixing Nut
2x	Fixing Screws
1x	Installation Instructions

EXPLODED VIEW

1. Pop-Up Stopper Cap
2. Stopper Sealing Ring
3. Waste Body and Flange
4. Friction Washer
5. Fixing Nut

Finish Options


Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Prepare the waste

Remove the fixing nut, friction washer and rubber sealing washer from the waste body.
Keep the stopper and internal mechanism assembled.


02



Install the waste body

Insert the waste body through the basin opening. Ensure the overflow openings in the waste body align with the basin's overflow channel.


03



Secure and connect

From below the basin, fit the rubber sealing washer, friction washer and fixing nut. Tighten evenly, then connect the waste outlet to the trap.

04



Test the installation

Operate the pop-up stopper and fill the basin. Check the waste connection and overflow system for correct drainage and leaks.

FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

-

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4