
rainco

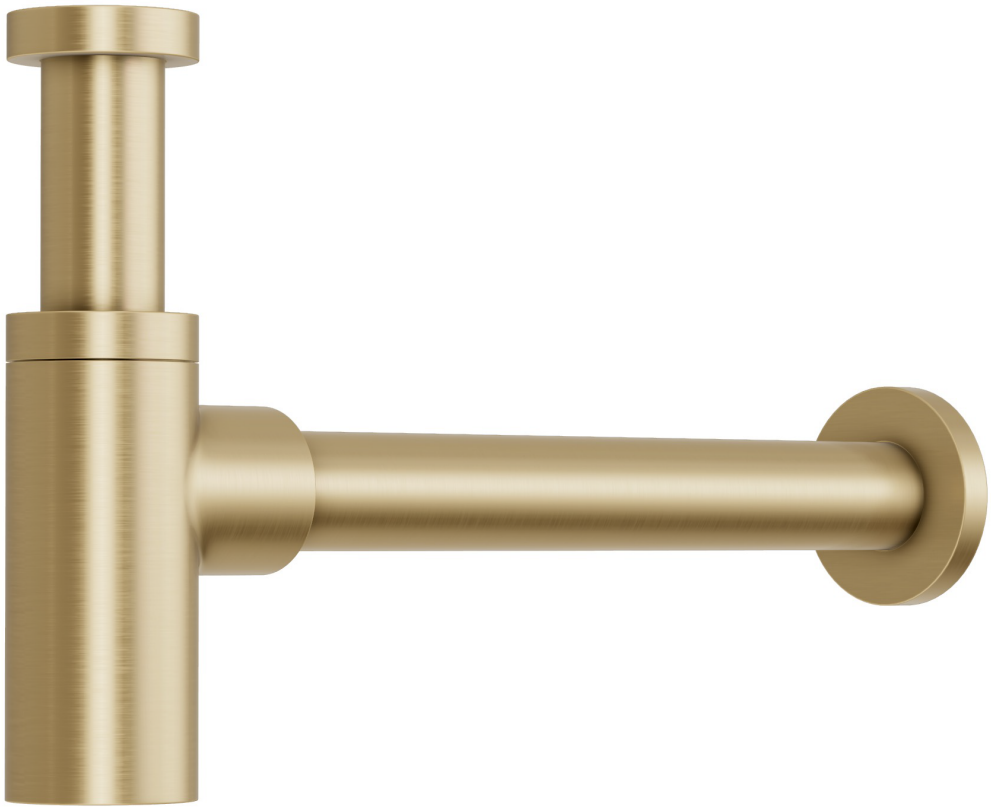

TIMELESS DESIGN, EFFORTLESS FUNCTIONALITY

BOTTLE TRAP

AT A GLANCE

BEST FOR

Seamless water drainage that enhances both function and aesthetics beneath your basin

FEEL


Crafted from lead-free solid brass, this bottle trap ensures durability, corrosion resistance, and a flawless finish, offering both long-lasting performance and a sleek, cohesive look

INSTALLATION

Wall-mounted, plumber required

rainco

Front View · Side View

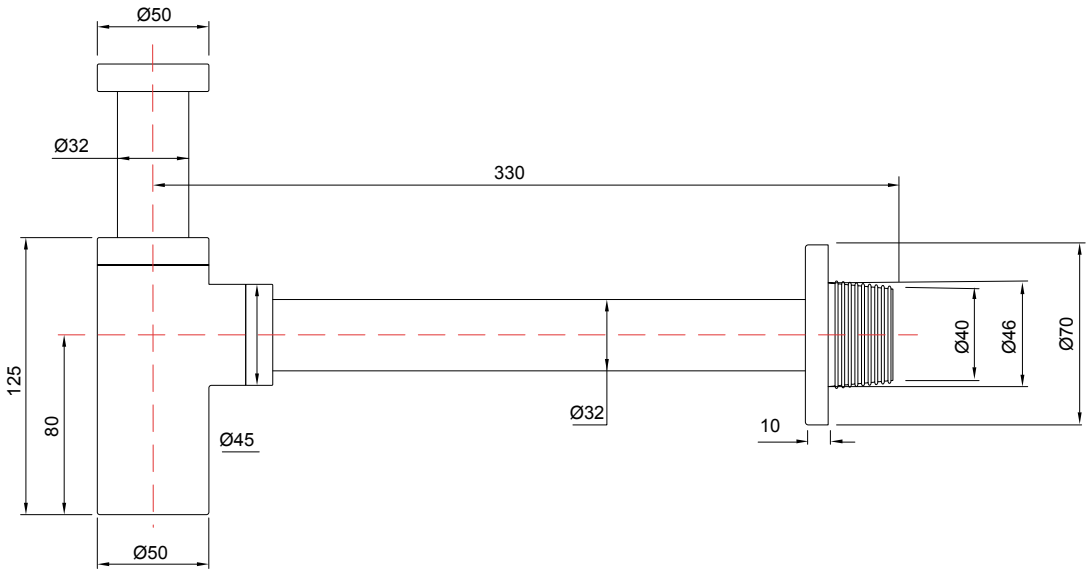

Specifications

MATERIAL

Lead-free Solid Brass

CONNECTIONS

Standard **G1 1/4”**

DIMENSIONS

Cover ring thickness **10 mm** · Trap arm thickness **Ø32 mm** · Bottle trap body height **125 mm** · Bottle trap tickness **Ø50 mm**

What’s in the box

INCLUDED

1x	Bottle Trap
1x	Rubber Washer
1x	Cover Ring

Finish Options


Antique Brass	Brushed Nickel	Brushed Brass	Brushed Copper	Gun Metal
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Check Measurements

Confirm the position of the waste outlet under the basin. Measure the required distance from the wall to the bottle trap and ensure the outlet is positioned correctly.


02



Check Pipe Length

Check the required length of the horizontal outlet pipe and the height of the bottle trap according to the measure-ments shown in the picture.


03



Connect Outlet Pipe

Remove the horizontal outlet pipe from the bottle trap. Connect the pipe to the wall waste outlet and make sure it is positioned correctly.

04



Install Bottle Trap

Connect the bottle trap body to the horizontal outlet pipe and basin waste. Tighten all connections securely and check for any leaks.

INSTALLATION GUIDE

Ensure all components are ready before starting installation. Check the position of the waste outlet and confirm the required measurements before installing the bottle trap.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4