rainco



CHANNEL GRATE

AT A GLANCE

BEST FOR

Showers
Reversible insert —
tile-ready on one side, solid
metal finish on the other

FEEL


Rust-resistant SS304
stainless steel

INSTALLATION

Floor-mounted

rainco

Front View · Side View

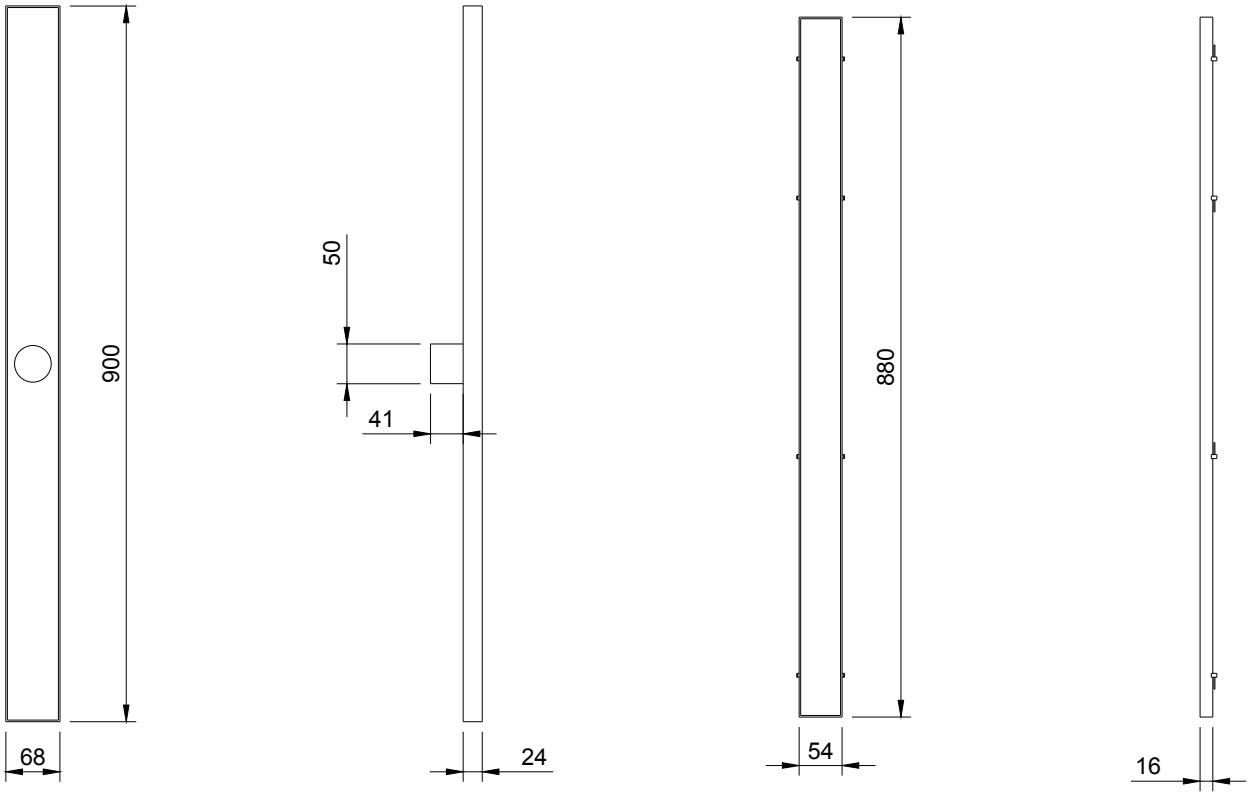

Specifications

MATERIAL

Stainless **304** Steel

REVERSIBLE INSERT

Tile-ready on one side, solid metal finish on the other

MOUNTING

Concealed wall fixings

DIMENSIONS


Outer part size **900 x 68 x 24 mm**
Tile insert part size **880 x 54 x 16 mm**
Tile cut out size **900 x 70 x 20 mm**
Outlet size **Ø50 mm**

rainco

Exploded View

Legend

1. Tile Insert
2. Clamps
3. Basket
4. Channel grate

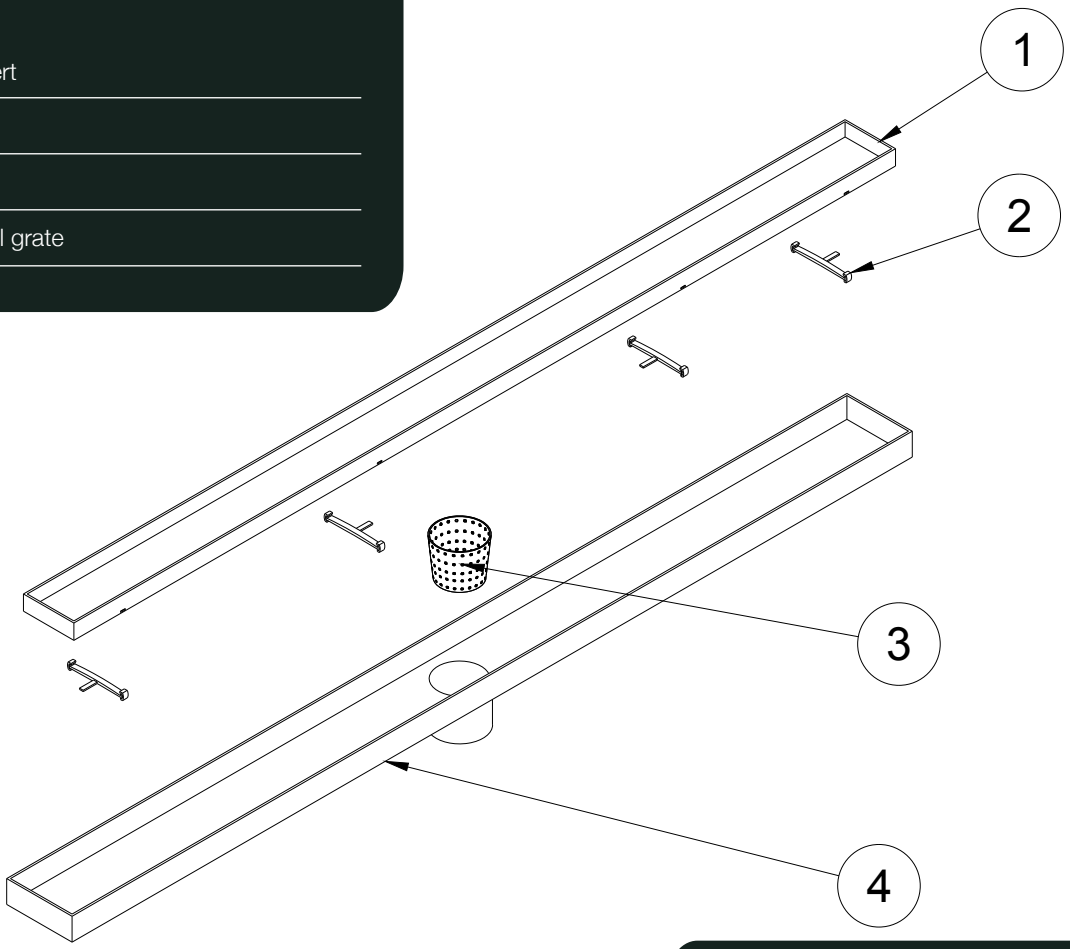

What's in the box

INCLUDED

1x	Channel grate
4x	Clamps
1x	Basket

Finish Options


Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Check Measurements

Check the length, width and depth required for the channel grate. Confirm the position of the drain outlet before cutting the tile.


02



Cut Tile

Cut the tile to the measurements shown in the picture. Make sure the cut-out is the correct size for the channel grate.


03



Install Channel Grate

Position the channel grate in the cut-out area and connect the drain outlet. Make sure the grate is level and the waterproofing is completed correctly around the installation area.

04



Choose Finish and Final Check

you can place the cut tile into the channel grate for a tiled finish, or flip the grate over to show the solid metal finish. Once installed, make sure the grate sits flush with the floor and that the drainage is clear and working properly.

INSTALLATION GUIDE

Preparation: Confirm the size and position of the floor drain outlet before starting installation. Ensure the installation area is suitable and the drainage pipe is correctly positioned.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4