rainco

DESIGNED TO ORGANISE, BUILT TO LAST

COMPACT SHOWER SHELF

AT A GLANCE

BEST FOR

Keeping shower essentials organised, or above toilet roll holders

MATERIAL

Crafted from Stainless Steel 304

INSTALLATION

-

rainco

Front View · Side View

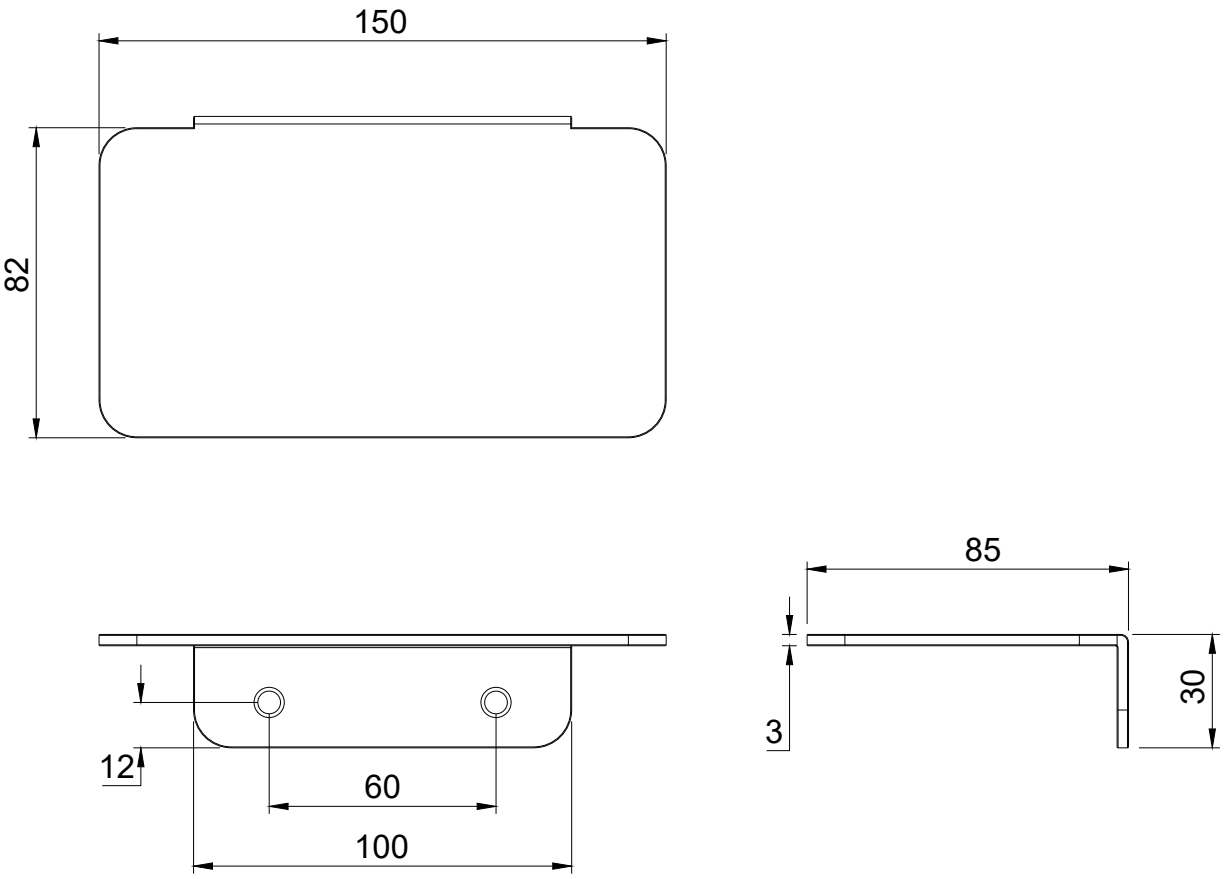

Specifications

MATERIAL

Stainless **304** Steel

CARTRIDGE

-

FLOW RATE

-

PRESSURE RANGE

50–800 kPa

TEMPERATURE

4–80 °C

CONNECTIONS

Standard **G1-1/4”**

MOUNTING

Concealed wall fixings · **60 mm**

DIMENSIONS

Dimension **150x60x3 mm**

rainco

Exploded View

What's in the box

INCLUDED

1x	Shower shelf
2x	Fixing screws
1x	Wall plugs

EXPLODED VIEW

1. Compact shower shelf
2. Fixing screws

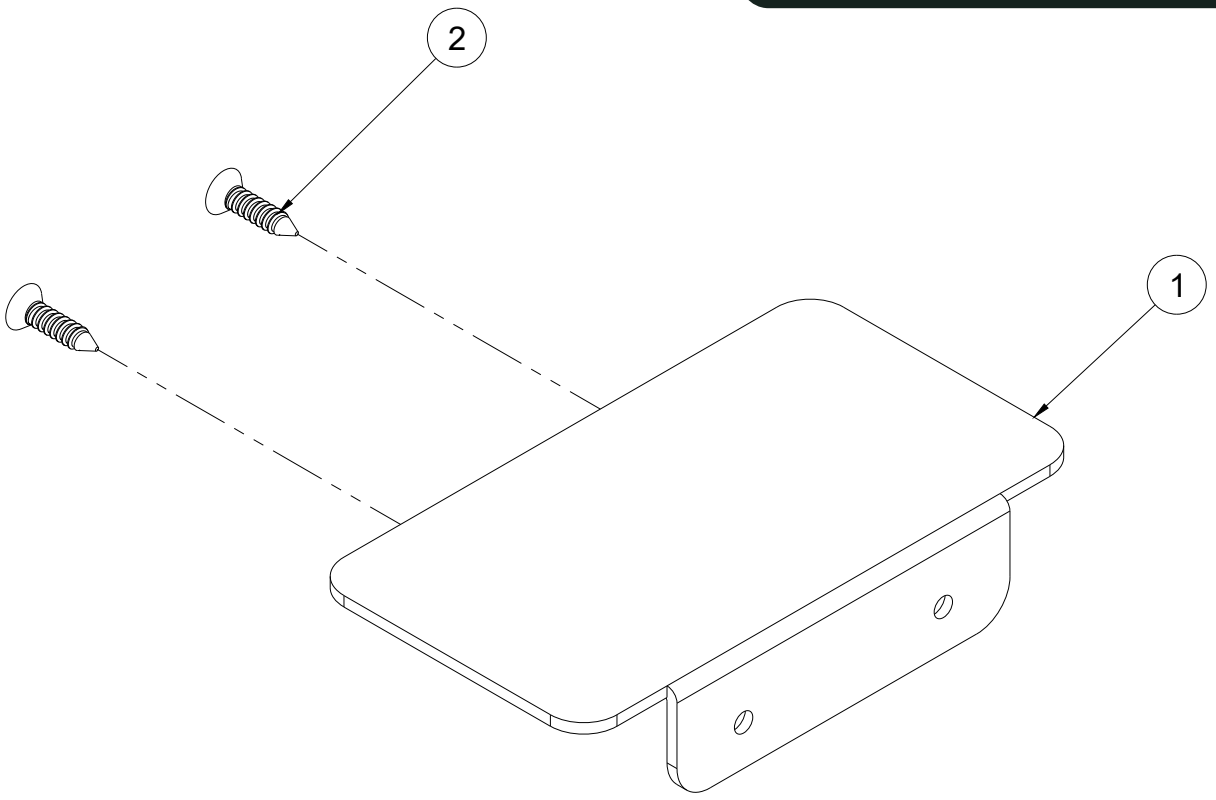

Finish Options

Antique Brass
AEA

Brushed Nickel
AEA

Brushed Brass
PVD

Brushed Copper
PVD

Gun Metal
PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500

01

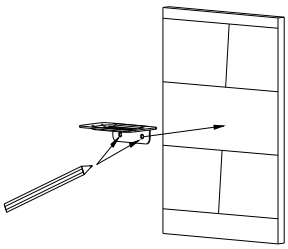

Mark the position

Select the shelf location and check for concealed pipes or electrical cables. Remove the mounting plate from the shelf using the supplied Allen key.

02

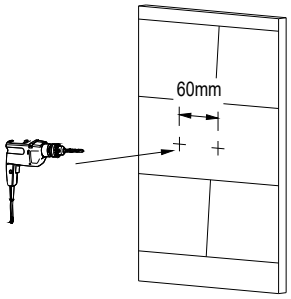

Drill the fixing holes

Hold the mounting plate level and mark the four fixing points at the 60×60 mm centres. Drill using a bit suitable for the tile and supporting wall.

03

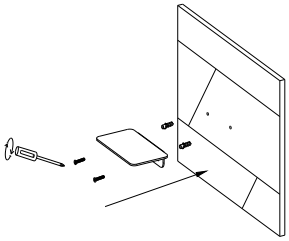

Secure the mounting plate

Insert suitable wall plugs and fasten the mounting plate securely. Seal drilled penetrations as required to maintain the waterproofing system.

04

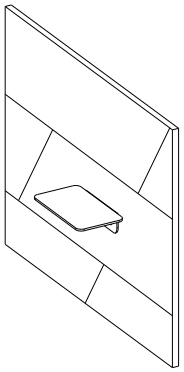

Fit the shelf

Position the shelf over the mounting plate and tighten the concealed grub screw using the Allen key. Check that the shelf is level, straight and secure.

FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

-

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4