




SIMPLE FORM, LASTING IMPRESSION

FORMA BATH SPOUT

AT A GLANCE

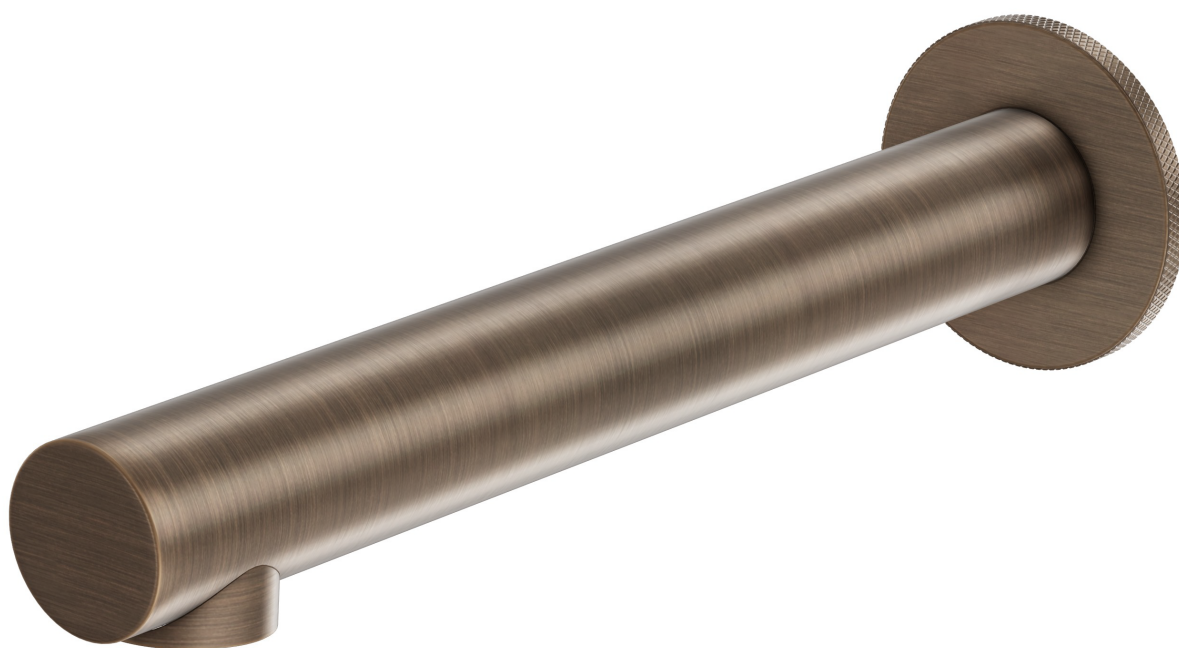

BEST FOR

Everyday bathrooms
for those who value
simplicity with
substance




FEEL

Clean & smooth
proportions



INSTALLATION

Wall-mounted,
plumber required

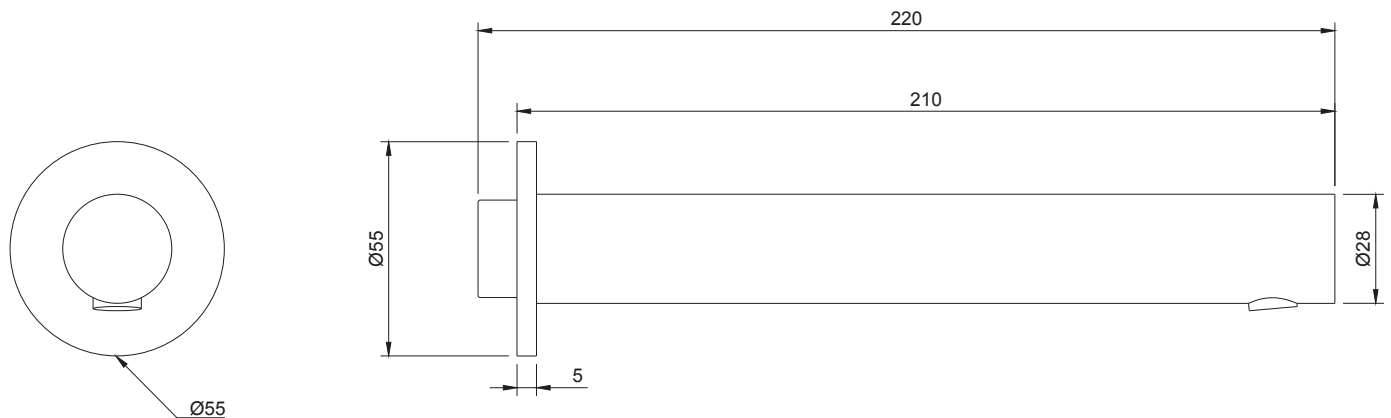

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic Cartridge



FLOW RATE

6 L/min · WELS 5 Star



PRESSURE RANGE

50–800 kPa




MOUNTING

Wall-mounted



DIMENSIONS

Spout Diameter **Ø28 mm** · Wall Projection **210 mm** ·
Base ring diameter **Ø55 mm**

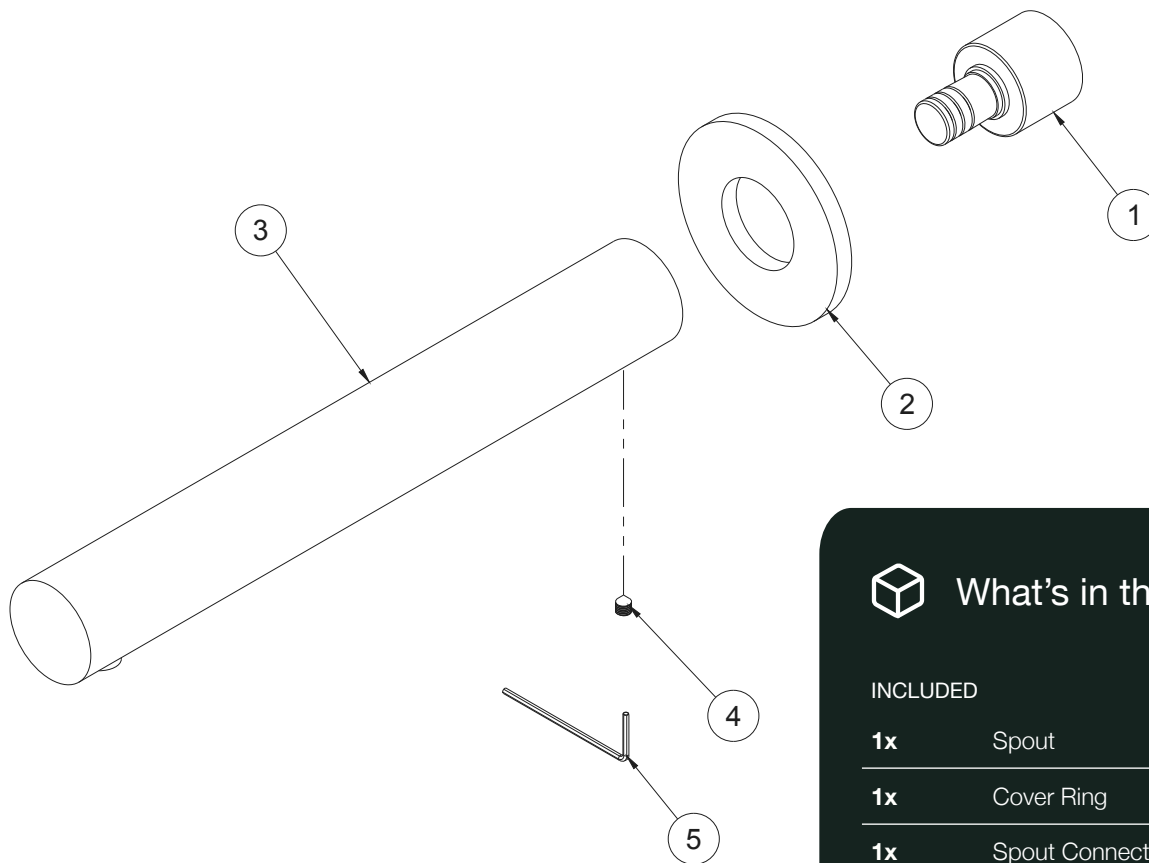

What's in the box

INCLUDED

1x	Spout
1x	Cover Ring
1x	Spout Connector
1x	Spare Grub Screw
1x	Mini Hex Wrench

EXPLODED VIEW

- ① Connection Screw
- ② Cover Ring
- ③ Spout
- ④ Grub Screw
- ⑤ Mini Hex Wrench

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Preparation

Confirm that the wall outlet connection is compatible with the spout connection. Ensure the outlet is clean, level, and free from debris before proceeding.


02

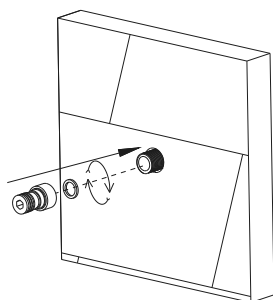

Positioning

Place the cover plate over the wall outlet. Carefully connect the water inlet of the spout to the outlet and tighten securely, ensuring a firm and flush fit against the wall.


03

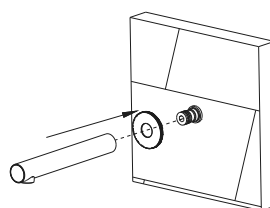

Secure Body

Attach the spout body, align it to the desired position, and tighten all fixing points to secure it in place.

04



Testing

Turn on the water supply and allow water to run through the spout. Check all connections thoroughly to ensure correct operation and confirm there are no leaks.



FINAL CHECK - TURN ON & TEST

Do not seal or tile until the installation has been fully tested and confirmed leak-free.

Care & Maintenance



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

5 STAR · 6 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4