




SIMPLE FORM, LASTING IMPRESSION

## FORMA BATH SPOUT

### AT A GLANCE

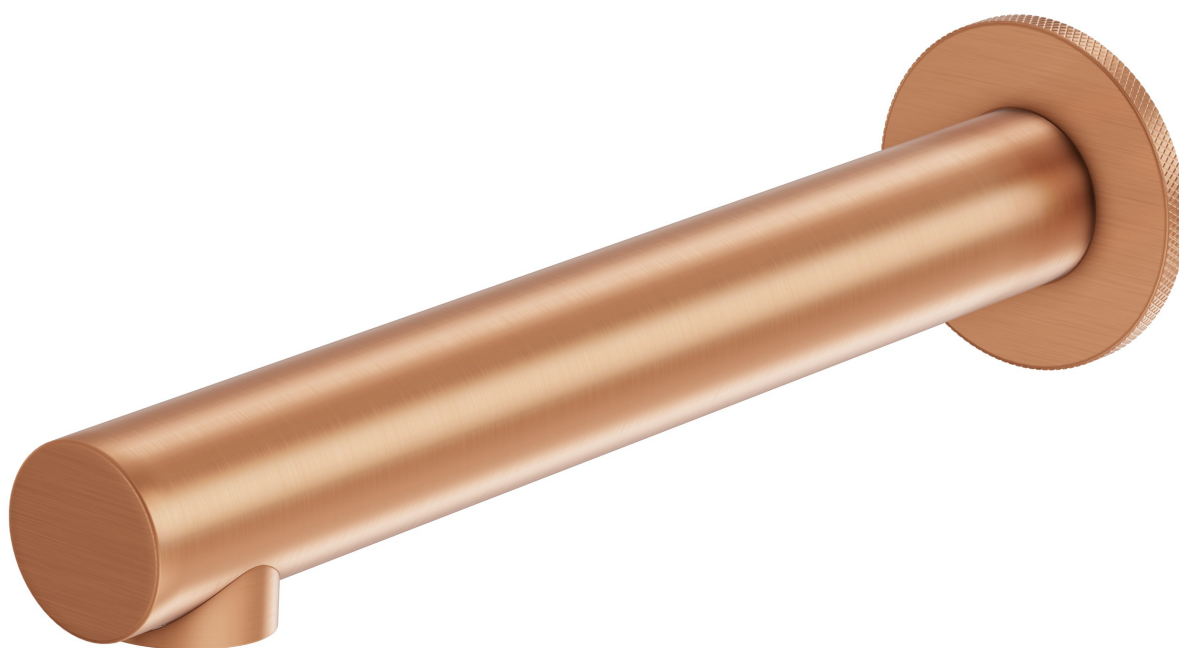

#### BEST FOR

Everyday bathrooms  
for those who value  
simplicity with  
substance




#### FEEL

Clean & smooth  
proportions



#### INSTALLATION

Wall-mounted,  
plumber required

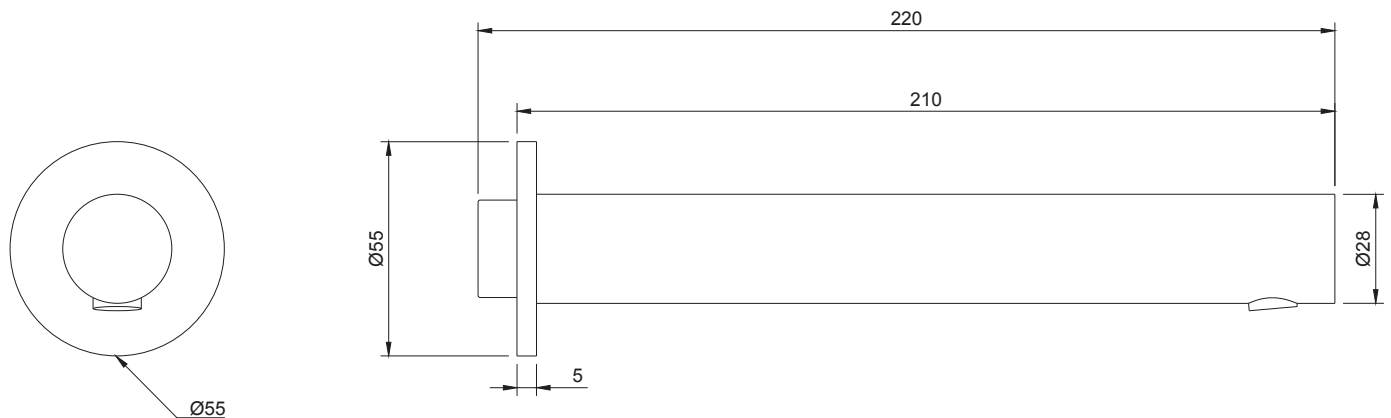

## Specifications



### MATERIAL

Lead-free **SS304** stainless steel



### CARTRIDGE

Citec ceramic Cartridge



### FLOW RATE

**6 L/min** · WELS 5 Star



### PRESSURE RANGE

**50–800 kPa**




### MOUNTING

Wall-mounted



### DIMENSIONS

Spout Diameter **Ø28 mm** · Wall Projection **210 mm** ·  
Base ring diameter **Ø55 mm**

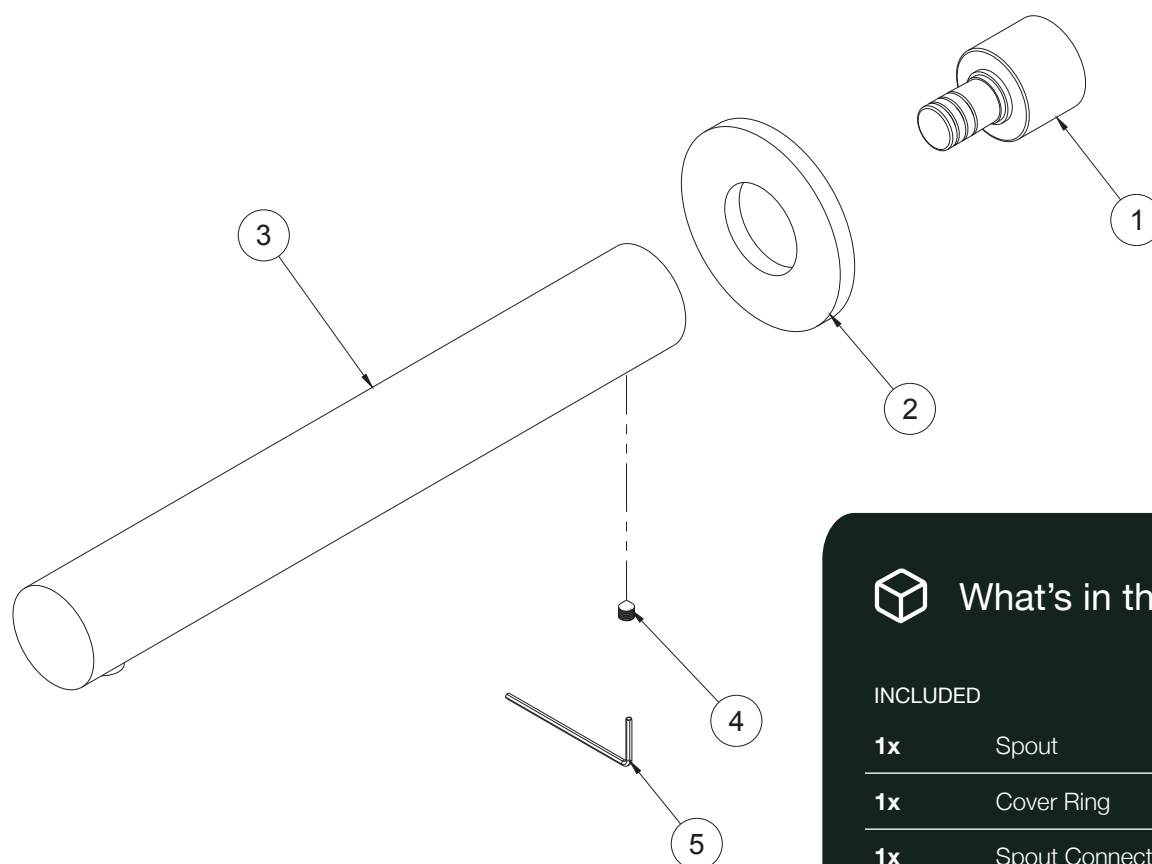

## What's in the box

### INCLUDED

|           |                  |
|-----------|------------------|
| <b>1x</b> | Spout            |
| <b>1x</b> | Cover Ring       |
| <b>1x</b> | Spout Connector  |
| <b>1x</b> | Spare Grub Screw |
| <b>1x</b> | Mini Hex Wrench  |

### EXPLODED VIEW

- ① Connection Screw
- ② Cover Ring
- ③ Spout
- ④ Grub Screw
- ⑤ Mini Hex Wrench

## Finish Options



**Antique Brass**  
AEA



**Brushed Nickel**  
AEA



**Brushed Brass**  
PVD



**Brushed Copper**  
PVD




**Gun Metal**  
PVD

## Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



### Preparation

Confirm that the wall outlet connection is compatible with the spout connection. Ensure the outlet is clean, level, and free from debris before proceeding.


02



### Positioning

Place the cover plate over the wall outlet. Carefully connect the water inlet of the spout to the outlet and tighten securely, ensuring a firm and flush fit against the wall.


03



### Secure Body

Attach the spout body, align it to the desired position, and tighten all fixing points to secure it in place.

04



### Testing

Turn on the water supply and allow water to run through the spout. Check all connections thoroughly to ensure correct operation and confirm there are no leaks.



### FINAL CHECK - TURN ON & TEST

Do not seal or tile until the installation has been fully tested and confirmed leak-free.

## Care & Maintenance



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

## Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

5 STAR · 6 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4