rainco

FLEXIBLE REACH. EVERYDAY COMFORT

FORMA HAND SHOWER WAND

AT A GLANCE

BEST FOR	FEEL	INSTALLATION
Rinsing, cleaning, and a more versatile showering experience	Crafted from Stainless Steel 304	Wall-mounted

rainco

Front View · Side View

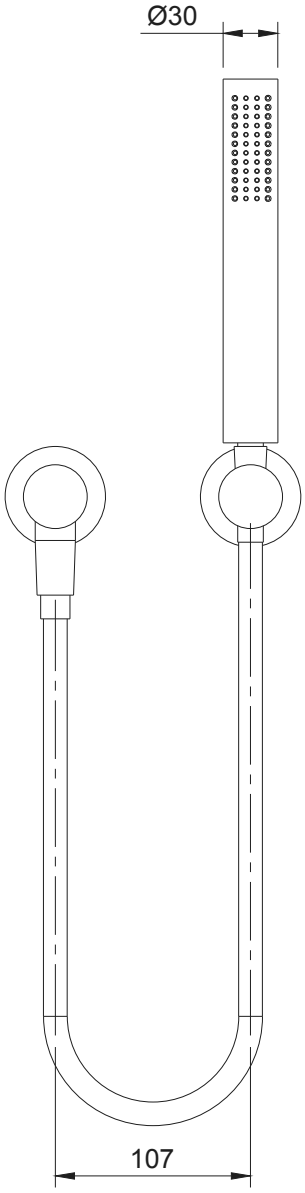

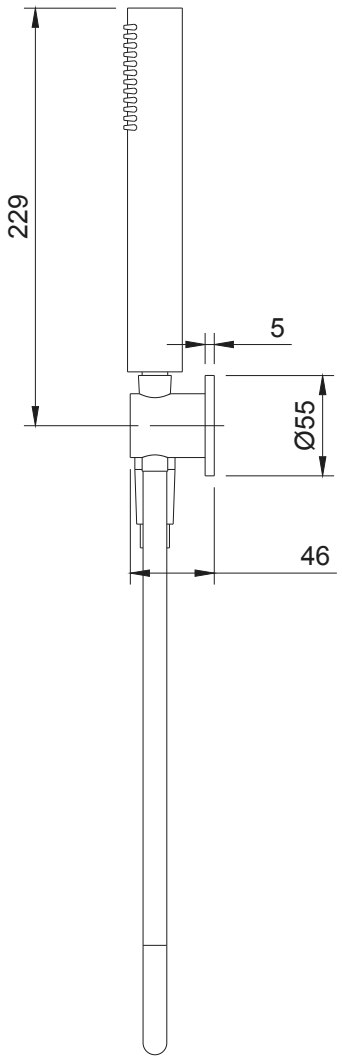

Specifications

MATERIAL

Stainless **304** Steel

FLOW RATE

8.5 L/min · WELS 3 Star

PRESSURE RANGE

50–800 kPa

MOUNTING

Concealed wall fixings

DIMENSIONS

Flexir hose length **150 cm** · Shower Wand Length **229 mm** · Wall projection **46 mm** · Cover Ring Diameter **Ø55 mm**

rainco

Exploded View

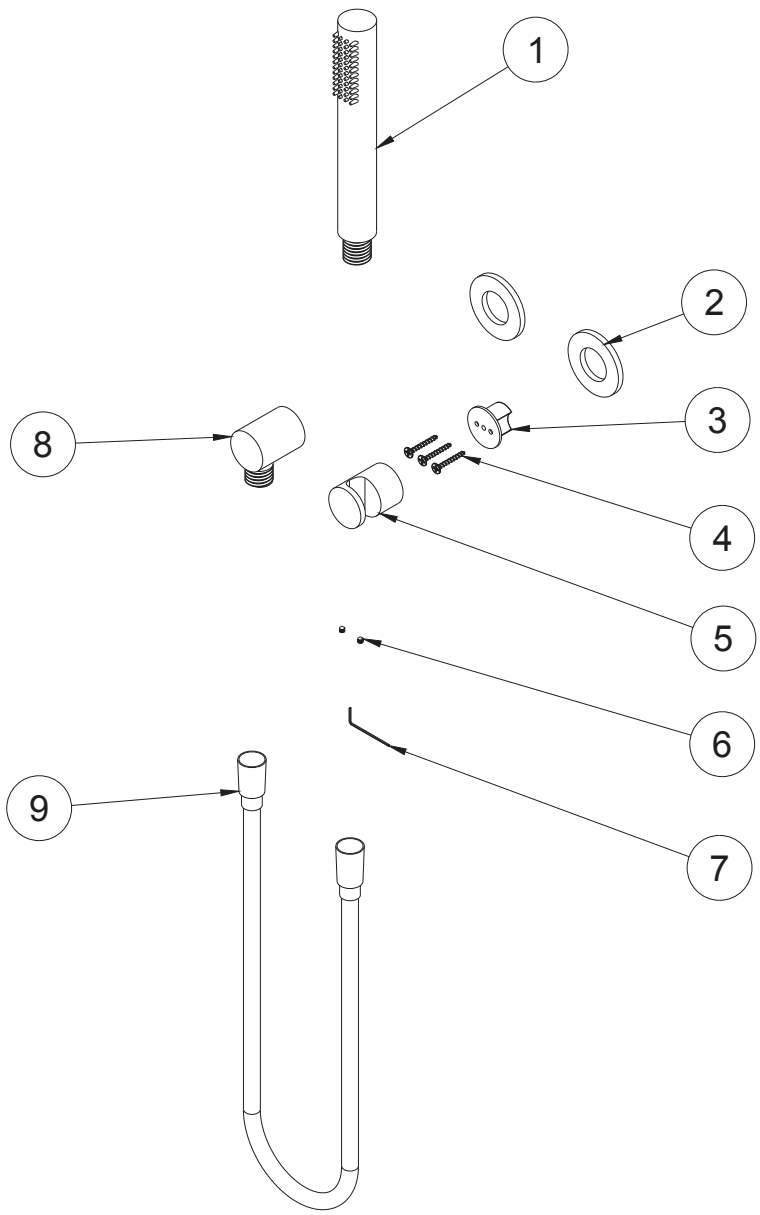

What's in the box

INCLUDED

1x	Hand Shower wand
1x	150cm Flexir Hose
2x	Cover Rings
1x	Water Outlet Connector
1x	Hand Wand Mount
1x	Spare Rubber Washer
3x	Fixing Screws
3x	Hollow Wall Anchors
2x	Spare Grub Screws
1x	Mini Hex Wrench

EXPLODED VIEW

1. Hand Shower Wand
2. Cover Rings
3. Wall Anchor
4. Fixing Screws
5. Wall Mount
6. Grub Screw
7. Mini Hex Wrench
8. Wall Outlet Connector
9. Flexir Hose

Finish Options

Antique Brass	Brushed Nickel	Brushed Brass	Brushed Copper	Gun Metal
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500

01



Prepare Parts

Prepare all accessories according to the installation picture. Check that the water outlet has the correct-sized connector for the hand shower.

02

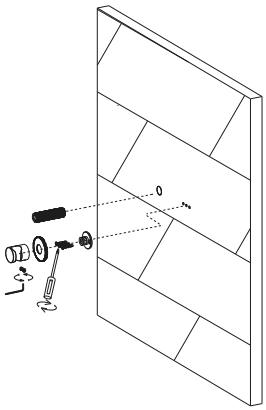

Install Water Supply Handle

Connect the water supply handle and plate cover to the water outlet. Tighten securely and ensure the plate cover is correctly positioned.

03

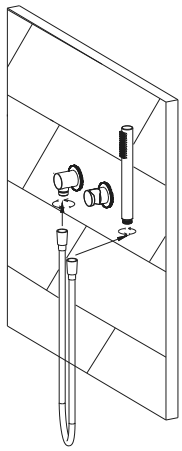

Connect Shower Hose

Attach one end of the shower hose to the water outlet. Connect the other end of the hose to the hand shower. Tighten both connections securely.

04

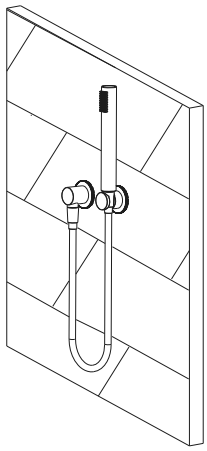

Turn On Water

Slowly turn on the water supply. Allow the hand shower to run and check all connections for leaks. Take care not to damage the flow controller during installation or testing.

FINAL CHECK

Confirm all connections and the hand shower are securely installed, with no leaks. Ensure the flow controller is intact and undamaged.

Care & Maintenance

MILD SOAP & WARM WATER

Clean gently to keep the surface bright.

SOFT CLOTH ONLY

Never use scourers or rough pads.

NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

3 STAR · 8.5 L/MIN

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4