



FLEXIBLE REACH. EVERYDAY COMFORT

FORMA HAND SHOWER WAND

AT A GLANCE



BEST FOR

Rinsing, cleaning,
and a more versatile
showering experience





FEEL

Crafted from Stainless
Steel 304



INSTALLATION

Wall-mounted

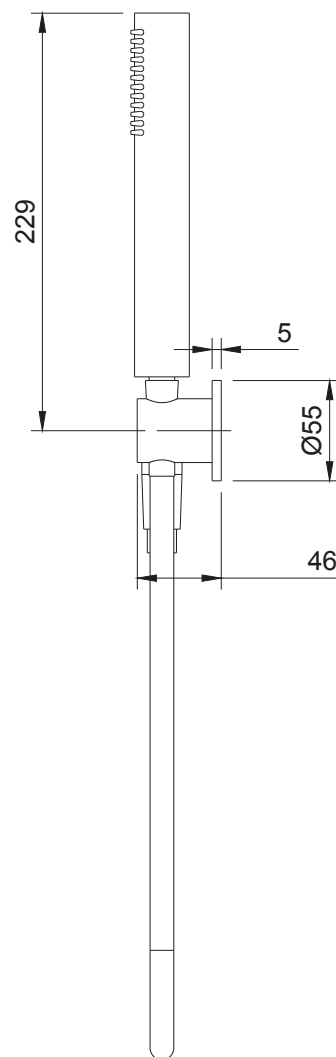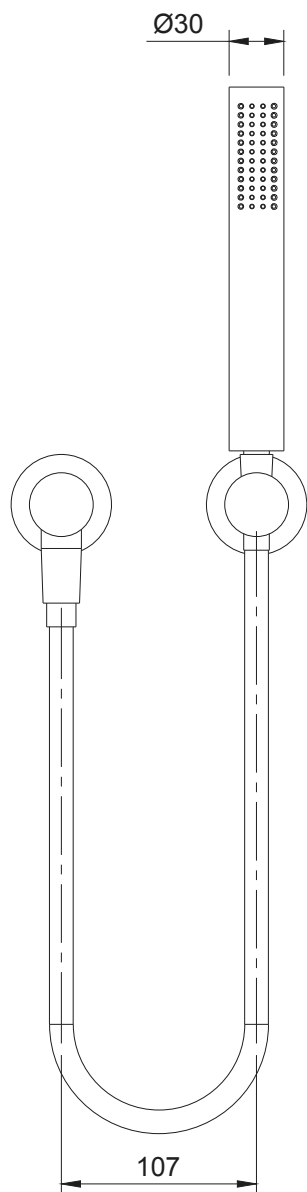

Specifications



MATERIAL

Stainless **304** Steel



FLOW RATE

8.5 L/min · WELS 3 Star



PRESSURE RANGE

50–800 kPa



MOUNTING

Concealed wall fixings



DIMENSIONS

Flexir hose length **150 cm** · Shower Wand
Length **229 mm** · Wall projection **46 mm** ·
Cover Ring Diameter **Ø55 mm**



What's in the box

INCLUDED

1x Hand Shower wand

1x 150cm Flexir Hose

2x Cover Rings

1x Water Outlet Connector

1x Hand Wand Mount

1x Spare Rubber Washer

3x Fixing Screws

3x Hollow Wall Anchors

2x Spare Grub Screws

1x Mini Hex Wrench

EXPLODED VIEW

① Hand Shower Wand

② Cover Rings

③ Wall Anchor

④ Fixing Screws


⑤ Wall Mount

⑥ Grub Screw

⑦ Mini Hex Wrench

⑧ Wall Outlet Connector

⑨ Flexir Hose

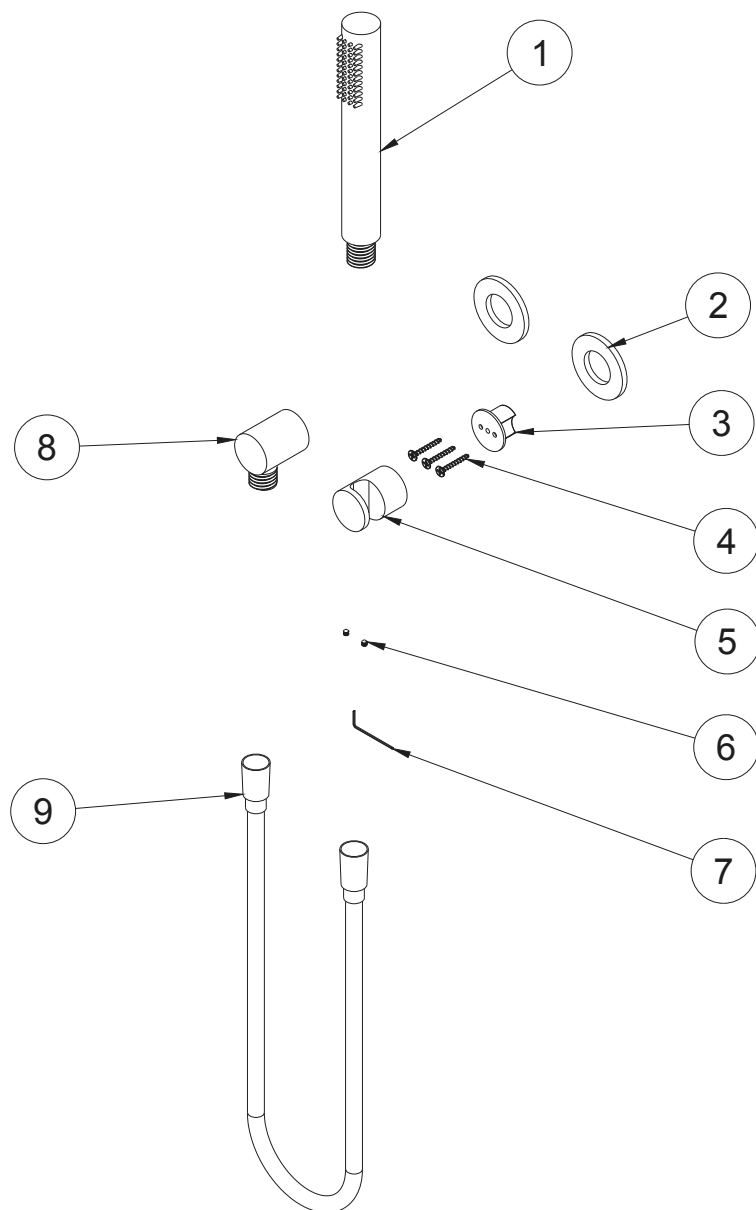

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Prepare Parts

Prepare all accessories according to the installation picture. Check that the water outlet has the correct-sized connector for the hand shower.


02

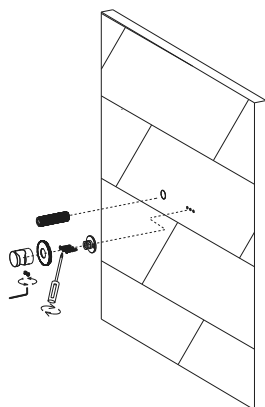

Install Water Supply Handle

Connect the water supply handle and plate cover to the water outlet. Tighten securely and ensure the plate cover is correctly positioned.


03

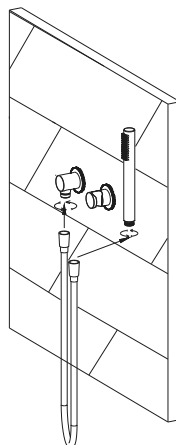

Connect Shower Hose

Attach one end of the shower hose to the water outlet. Connect the other end of the hose to the hand shower. Tighten both connections securely.

04

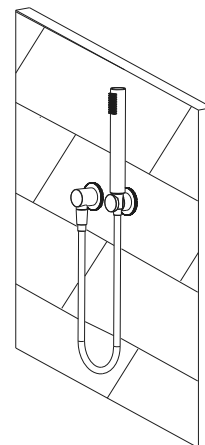

Turn On Water

Slowly turn on the water supply. Allow the hand shower to run and check all connections for leaks. Take care not to damage the flow controller during installation or testing.



FINAL CHECK

Confirm all connections and the hand shower are securely installed, with no leaks. Ensure the flow controller is intact and undamaged.

Care & Maintenance



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

3 STAR · 8.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4