



STEADY AND SMOOTH MOVEMENT

FORMA PROGRESSIVE KITCHEN PULL OUT MIXER

AT A GLANCE



BEST FOR

Everyday kitchen
use



HEIGHT

Balanced for overhead
clearance without
dominating the space




FEEL

Smooth pull-out action
with a veggie spray
setting



INSTALLATION

Bench-mounted,
plumber required

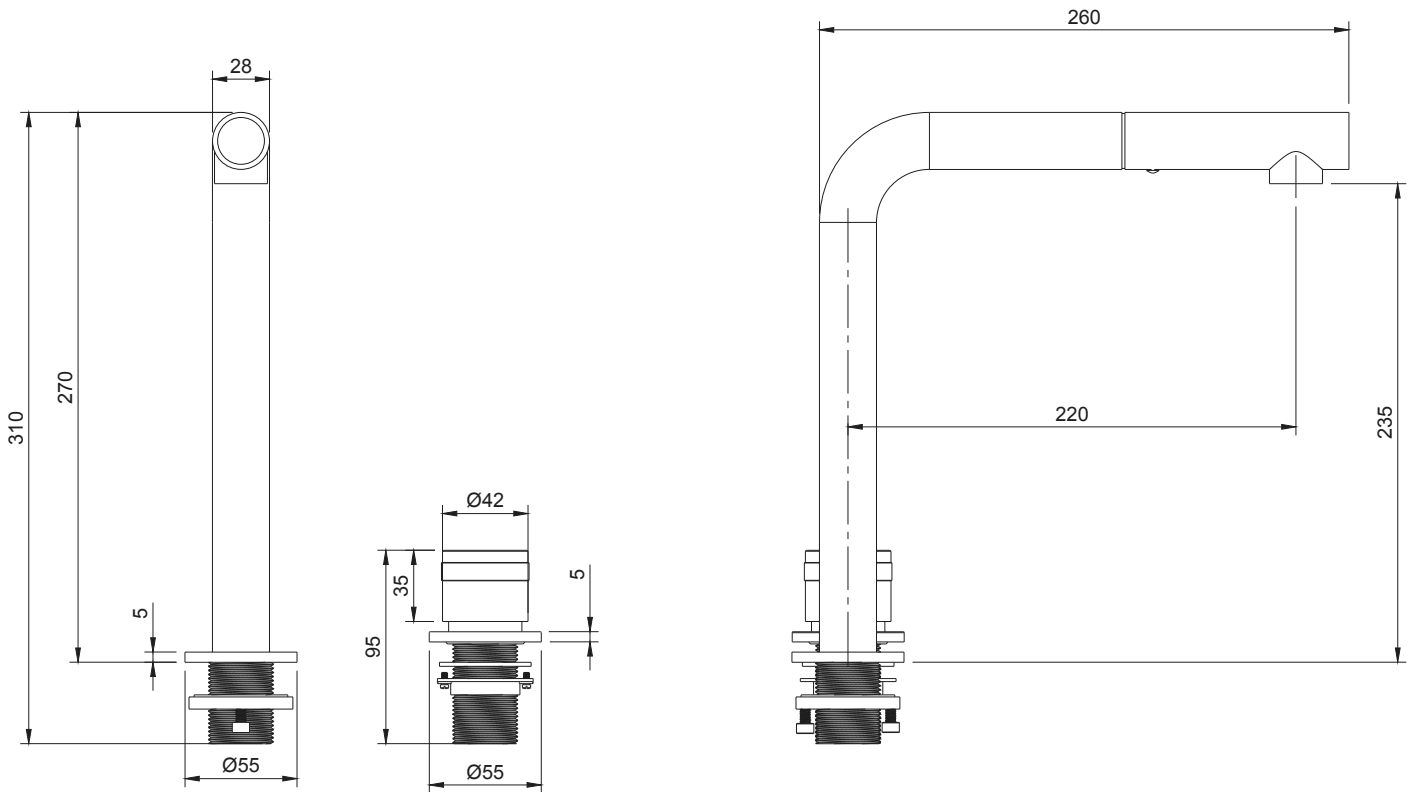

Specifications



MATERIAL

Premium **SS304** Stainless Steel



CARTRIDGE

Citec ceramic cartridge (Ø35mm)



FLOW RATE

6 L/min · WELS 5 Star



PRESSURE RANGE

50–800 kPa



CONNECTIONS

Standard **G1/2"**




MOUNTING

Bench-mounted



DIMENSIONS

Overall Height **270 mm** · Spout Diameter **Ø28 mm** ·
Mixer Diameter **Ø42 mm** · Cut-Out Size **Ø35 mm**

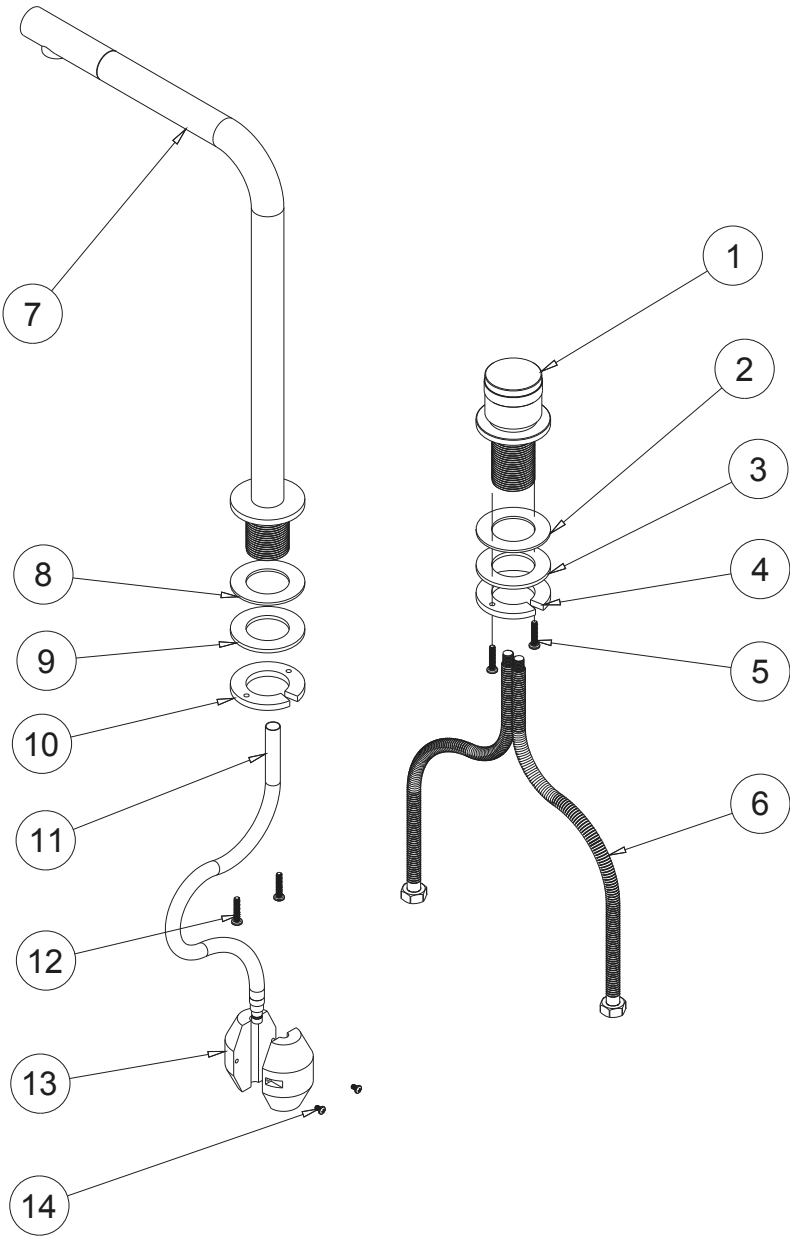

What's in the box

INCLUDED

1x	Pull-out Kitchen Tap
1x	Progressive Mixer
1x	Hot Flexir Hose
1x	Cold Flexir Hose
1x	Pull-down Hose
1x	Weight Ball
2x	Mount Nut
4x	Washers
1x	Mini Hex Wrench
6x	Fixing Screws

EXPLODED VIEW

- ① Progressive Mixer
- ② Rubber
- ③ Washer
- ④ Mount Nut
- ⑤ Fixing Screws
- ⑥ Flexir Hose
- ⑦ Kitchen Tap
- ⑧ Rubber
- ⑨ Washer
- ⑩ Mount Nut
- ⑪ Pull-down Hose
- ⑫ Mounting Screws
- ⑬ Weight ball
- ⑭ Fixing Screws

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

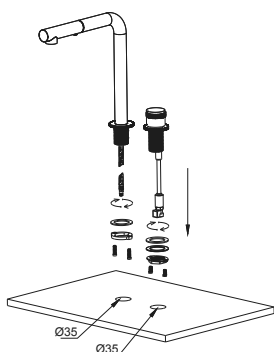

Preparation

Prepare all accessories.
Front view: LH = hot, RH = cold. Drill holes: Mixer Ø35 mm / Tap Ø35 mm. Ensure correct alignment.


02

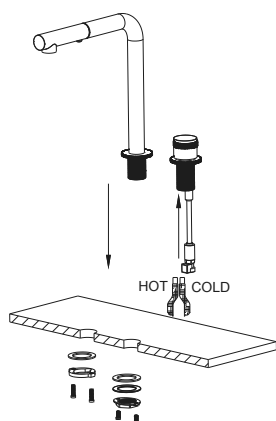

Install Mixer

Place the mixer into the hole. Feed the hoses through and connect them. Secure with fixing accessories. Align correctly and tighten firmly.


03

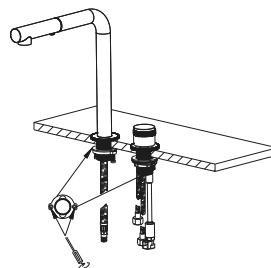

Install Kitchen Tap

Place the tap into the hole. Feed the pull-down hose through. Secure with fixing accessories. Attach the weight ball and tighten firmly.

04

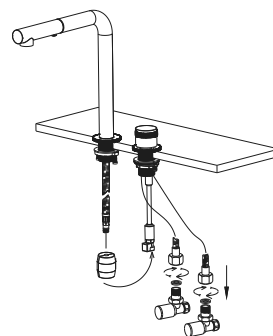

Connect Water Supply

Connect hot and cold hoses to the angle valves. Connect the remaining pipe to the faucet. Make sure hoses are secure, untwisted, and not kinked.



FINAL CHECK · TURN ON & TEST

Slowly open the hot and cold water supply valves and run the mixer. Check all connections carefully and confirm there are no leaks before completing the installation.

Care & Maintenance



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

5 STAR · 6 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4