

STEADY AND SMOOTH MOVEMENT

## FORMA PROGRESSIVE KITCHEN PULL OUT MIXER

AT A GLANCE



BEST FOR

Everyday kitchen  
use



HEIGHT

Balanced for overhead  
clearance without  
dominating the space




FEEL

Smooth pull-out action  
with a veggie spray  
setting



INSTALLATION

Bench-mounted,  
plumber required

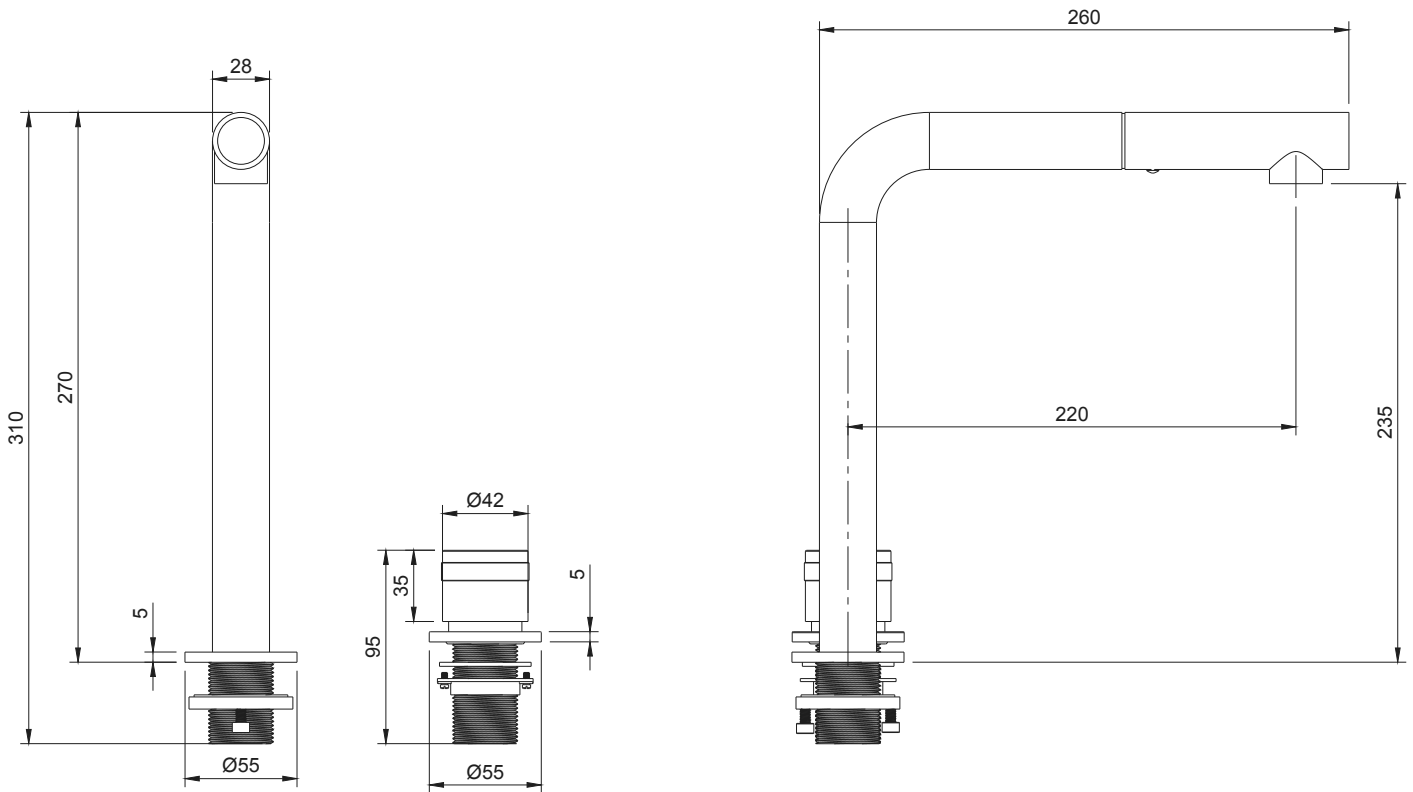

## Specifications



### MATERIAL

Premium **SS304** Stainless Steel



### CARTRIDGE

Citec ceramic cartridge (Ø35mm)



### FLOW RATE

**6 L/min** · WELS 5 Star



### PRESSURE RANGE

**50–800 kPa**



### CONNECTIONS

Standard **G1/2"**




### MOUNTING

Bench-mounted



### DIMENSIONS

Overall Height **270 mm** · Spout Diameter **Ø28 mm** ·  
Mixer Diameter **Ø42 mm** · Cut-Out Size **Ø35 mm**

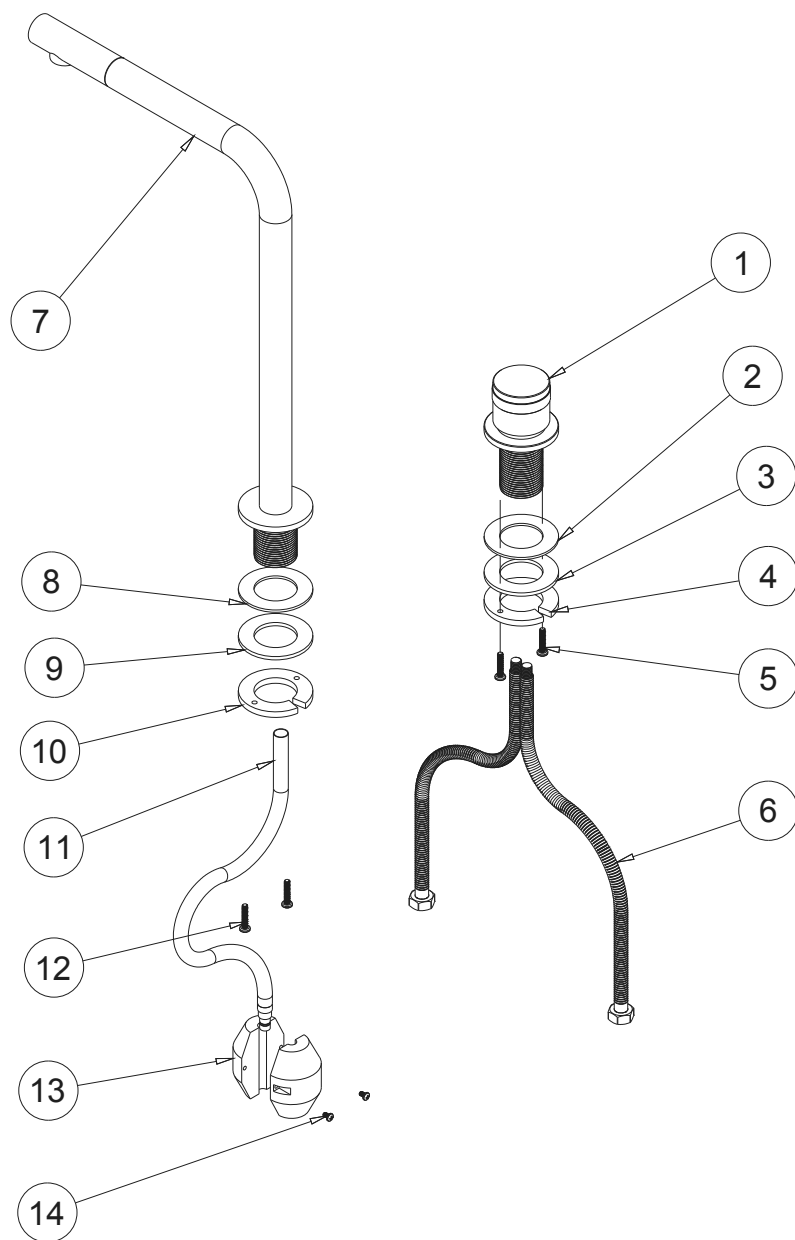

## What's in the box

### INCLUDED

|           |                      |
|-----------|----------------------|
| <b>1x</b> | Pull-out Kitchen Tap |
| <b>1x</b> | Progressive Mixer    |
| <b>1x</b> | Hot Flexir Hose      |
| <b>1x</b> | Cold Flexir Hose     |
| <b>1x</b> | Pull-down Hose       |
| <b>1x</b> | Weight Ball          |
| <b>2x</b> | Mount Nut            |
| <b>4x</b> | Washers              |
| <b>1x</b> | Mini Hex Wrench      |
| <b>6x</b> | Fixing Screws        |

### EXPLODED VIEW

- ① Progressive Mixer
- ② Rubber
- ③ Washer
- ④ Mount Nut
- ⑤ Fixing Screws
- ⑥ Flexir Hose
- ⑦ Kitchen Tap
- ⑧ Rubber
- ⑨ Washer
- ⑩ Mount Nut
- ⑪ Pull-down Hose
- ⑫ Mounting Screws
- ⑬ Weight ball
- ⑭ Fixing Screws

## Finish Options



**Antique Brass**  
AEA



**Brushed Nickel**  
AEA



**Brushed Brass**  
PVD



**Brushed Copper**  
PVD




**Gun Metal**  
PVD

## Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

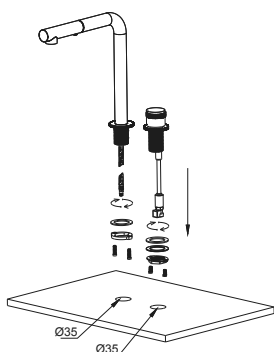

### Preparation

Prepare all accessories.  
Front view: LH = hot, RH = cold. Drill holes: Mixer Ø35 mm / Tap Ø35 mm. Ensure correct alignment.


02

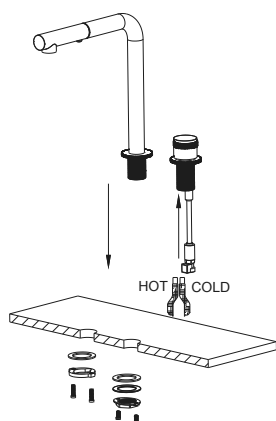

### Install Mixer

Place the mixer into the hole. Feed the hoses through and connect them. Secure with fixing accessories. Align correctly and tighten firmly.


03

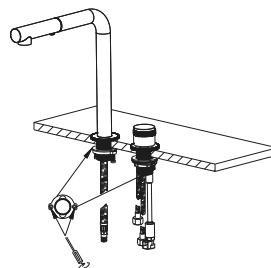

### Install Kitchen Tap

Place the tap into the hole. Feed the pull-down hose through. Secure with fixing accessories. Attach the weight ball and tighten firmly.

04

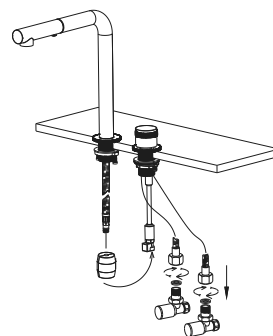

### Connect Water Supply

Connect hot and cold hoses to the angle valves. Connect the remaining pipe to the faucet. Make sure hoses are secure, untwisted, and not kinked.



### FINAL CHECK · TURN ON & TEST

Slowly open the hot and cold water supply valves and run the mixer. Check all connections carefully and confirm there are no leaks before completing the installation.

## Care & Maintenance



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

## Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

5 STAR · 6 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4