



ELEVATE AND BALANCE

FORMA PROGRESSIVE TALL BASIN MIXER

AT A GLANCE



BEST FOR

Everyday
bathrooms



HEIGHT

Designed to balance out
spaces




FEEL

Precise temperature
control with a single
smooth movement



INSTALLATION

Bench-mounted,
plumber required

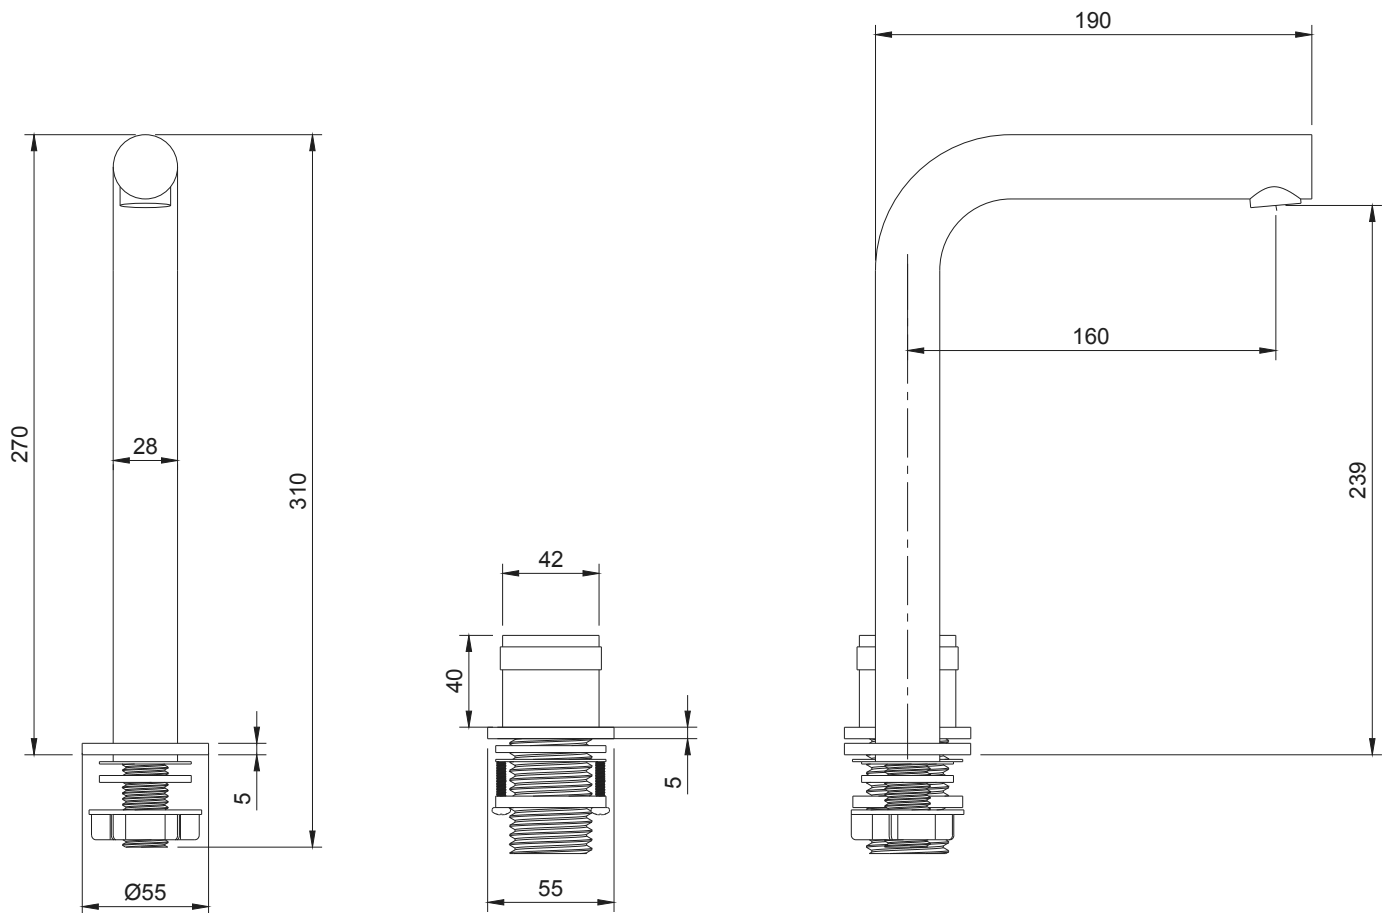

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic Cartridge



FLOW RATE

6 L/min · WELS 5 Star



PRESSURE RANGE

50–800 kPa



CONNECTIONS

Standard **G1/2"**



MOUNTING

Bench-mounted



DIMENSIONS

Overall Height **270 mm** · Spout Thickness **Ø28 mm** ·

Spout projection **190 mm** ·

Cut-Out Size **Ø25mm** (Tap) - **Ø35mm** (Mixer)




What's in the box

INCLUDED

1x	Tap
1x	Progressive Mixer
1x	Cold Flexir Hose
1x	Hot Flexir Hose
1x	Outlet Flexir Hose
5x	Washers
1x	Mount Nut
2x	Fixing Screws
1x	Spare Grub Screw
1x	Mini Hex Wrench

EXPLODED VIEW

- 1 Mixer
- 2 Grub Screw
- 3 Mini Hex Wrench
- 4 Rubber
- 5 Washer
- 6 Mount Nut
- 7 Fixing Screws
- 8 Flexir Hose
- 9 Tap
- 10 Cover Ring
- 11 Rubber
- 12 Washer
- 13 Metal Screw

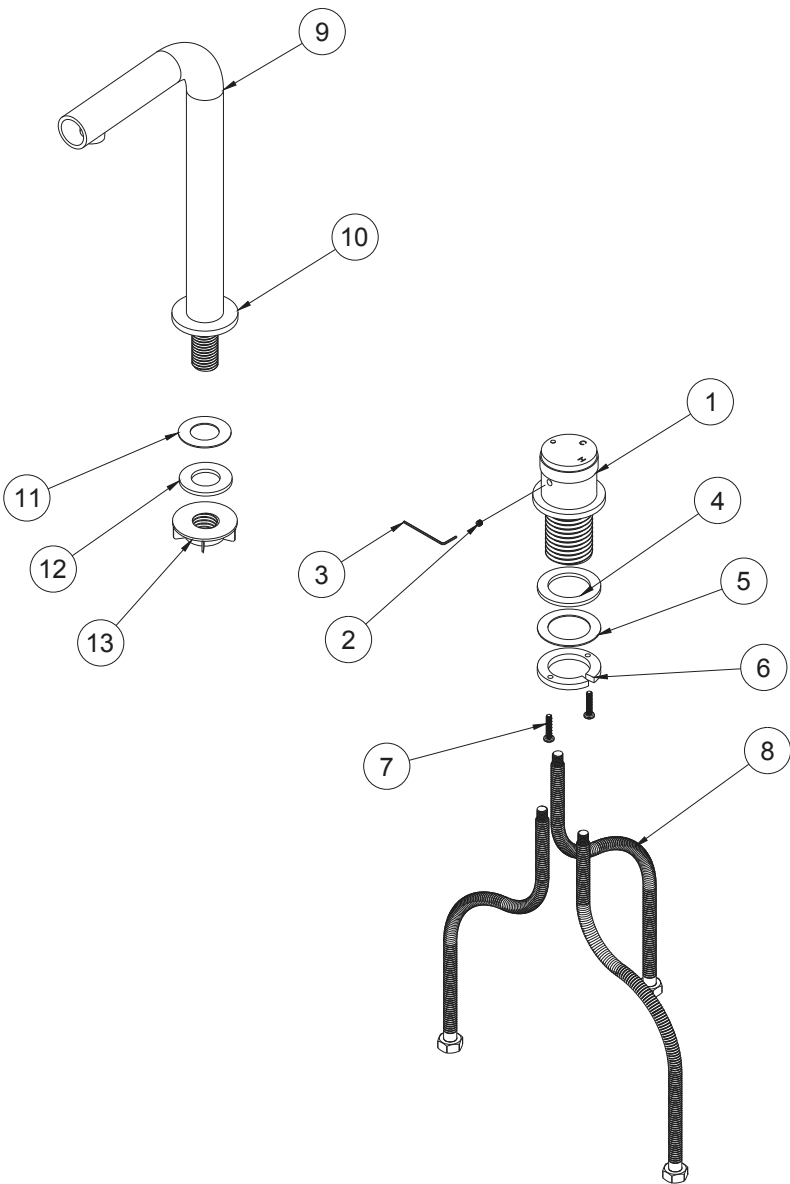

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Prepare Installation

Ensure all accessories are ready before installation. The left-hand side is for the hot water inlet and the right-hand side is for the cold water inlet.


02

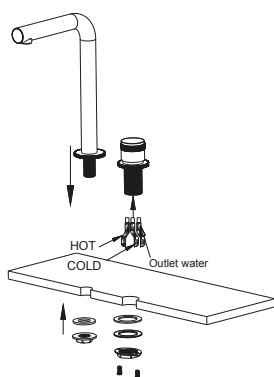

Install Mixer Body

Place the mixer above the installation holes. From underneath, connect the two water hoses to the mixer.


03

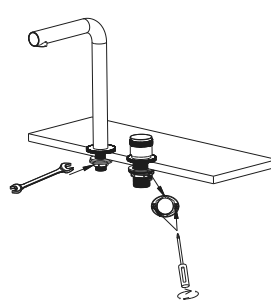

Connect Water Supply

Connect the hot and cold water hoses to the corresponding wall water outlet angle valves. Connect the remaining pipe to the faucet.

04

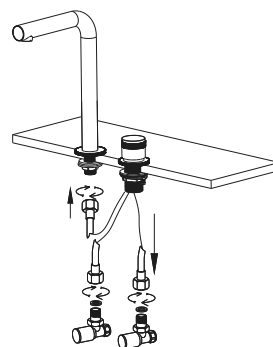

Complete Installation

Once testing is successful, ensure all connections are secure and the mixer is operating correctly.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and test to ensure correct operation and no leaks. Do not seal or tile until fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

5 STAR · 6 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4