




SMOOTH AND CONTROLLED WATER FLOW

FORMA PROGRESSIVE WALL MIXER AND TAP

AT A GLANCE

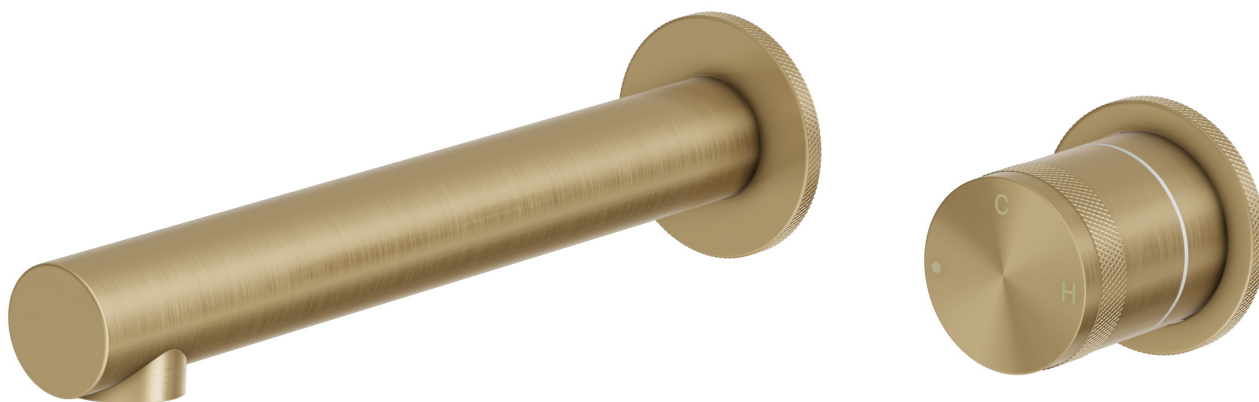

BEST FOR

Everyday bathrooms
for those who value
space, flow and detail




FEEL

Precise temperature
and flow control



INSTALLATION

Wall-mounted,
plumber required

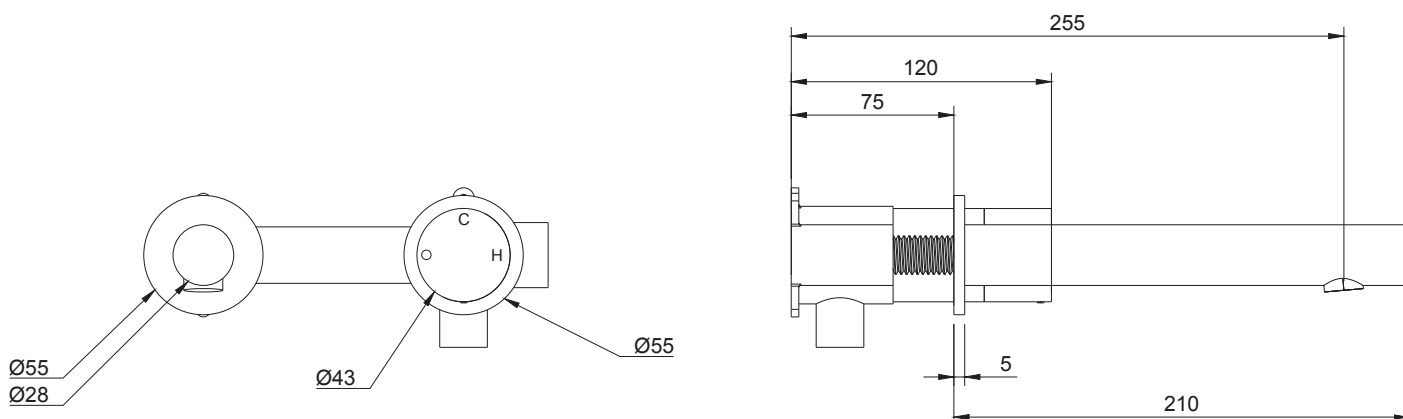

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic Cartridge



FLOW RATE

6 L/min · WELS 5 Star



PRESSURE RANGE

50–800 kPa



CONNECTIONS

Standard **G1/2"**




MOUNTING

Wall-mounted



DIMENSIONS

Cover Ring Diameter **Ø55 mm** · Spout Thickness
Ø28 mm · Wall projection **210 mm**
Cut-Out Size **Ø45mm** (Mixer) - **Ø25mm** (Spout)

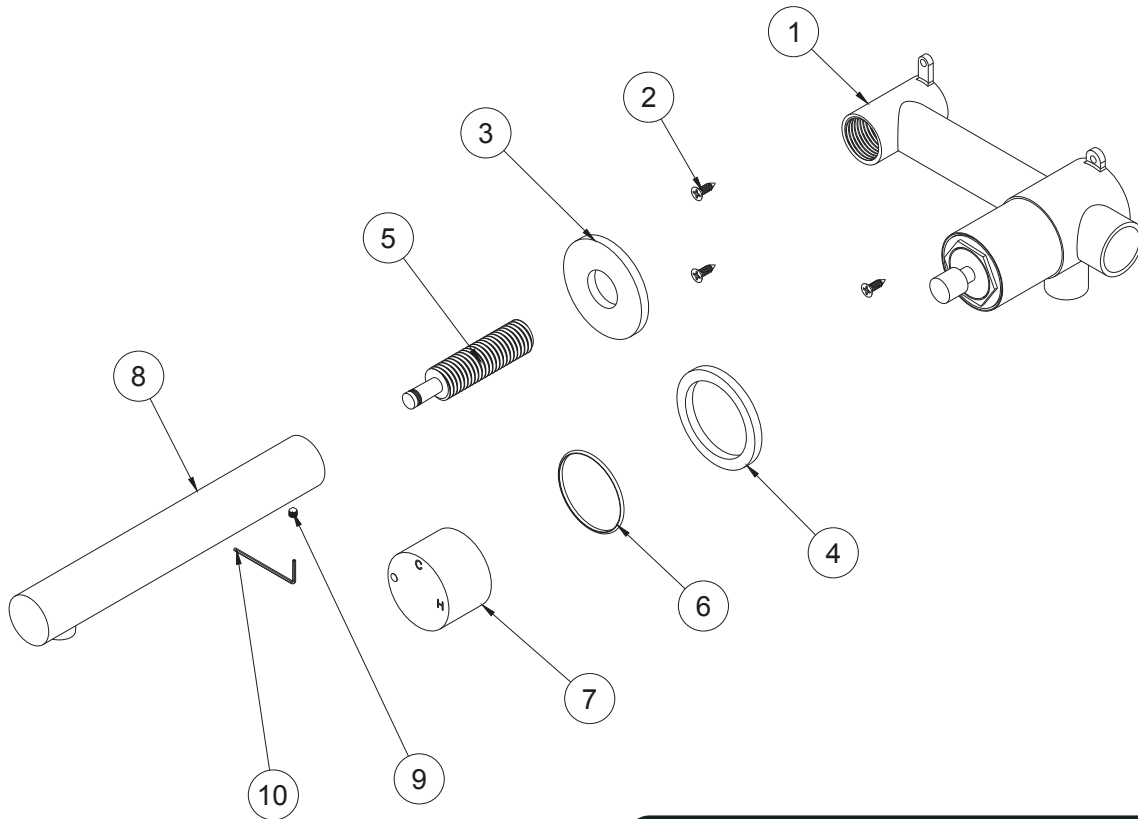

EXPLODED VIEW

- ① In-wall Body
- ② Fixing Screws
- ③ Spout Cover Ring
- ④ Mixer Cover Ring
- ⑤ Connector Screw
- ⑥ Washer
- ⑦ Mixer
- ⑧ Spout
- ⑨ Grub Screw
- ⑩ Mini Hex Wrench



What's in the box

INCLUDED

1x	In-wall Body
1x	Spout
1x	Mixer
1x	Spout Connector Screw
2x	Cover Rings
3x	Fixing Screws
3x	Hollow Wall Anchors
2x	Spare Grub Screw
1x	Mini Hex Wrench

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Prepare Installation

Ensure all accessories are ready before installation. The below side is for the hot water inlet and the right-hand side is for the cold water inlet.


02

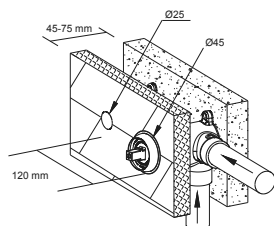

Install Mixer Body

Fit the mixer main body in the desired position and connect the hot and cold pipework to the mixer. After fixing the mixer, turn on the water supply and check all connections for leaks.


03

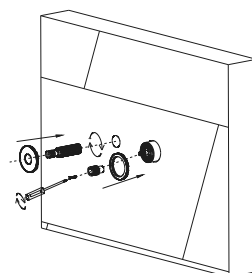

Complete Wall Installation

Refer to the installation steps above for the required opening size and embedding depth. Do not seal or tile until fully tested.

04

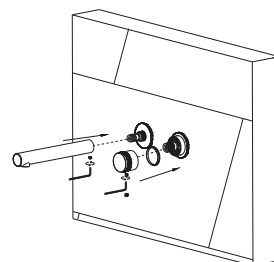

Install Cover Plates and Handle

Attach the cover plates to the mixer body. Install the mixer handle and secure it using an Allen key.



FINAL TESTING

After installation, run the mixer and inspect all connections for leaks.

Care & Maintenance



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

5 STAR · 6 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4