





REFINED SHAPE, FLEXIBLE FUNCTION

HAVEN GOOSENECK PULL OUT MIXER

AT A GLANCE

 BEST FOR Everyday kitchens, family use	 REACH 225mm for practical sink coverage	 HEIGHT Balanced for overhead clearance without dominating the space	 FEEL Smooth pull-out action with controlled return	 INSTALLATION Bench-mounted, plumber required
---	--	--	---	---

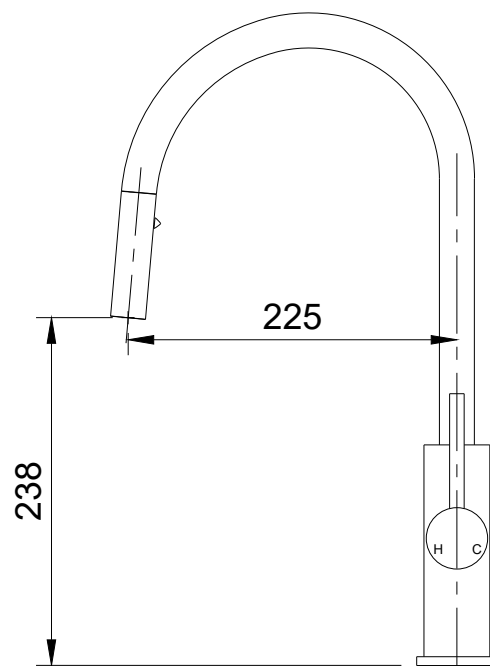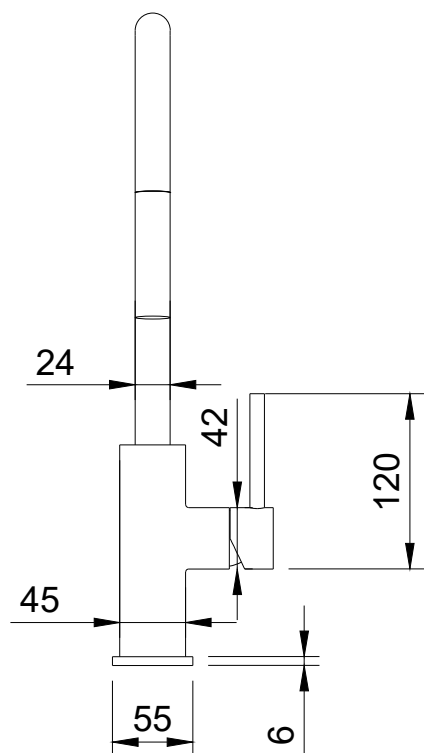

Specifications



MATERIAL

Lead-free **Solid** Brass



CARTRIDGE

Citec ceramic cartridge · **Ø35 mm**



FLOW RATE

6.5 L/min · WELS 4 Star



PRESSURE RANGE

150–500 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Bench-mounted · cut-out **Ø35 mm**



DIMENSIONS

Overall height **238 mm** · Spout reach **225 mm**
· Body height **120 mm** · Base diameter **55 mm**

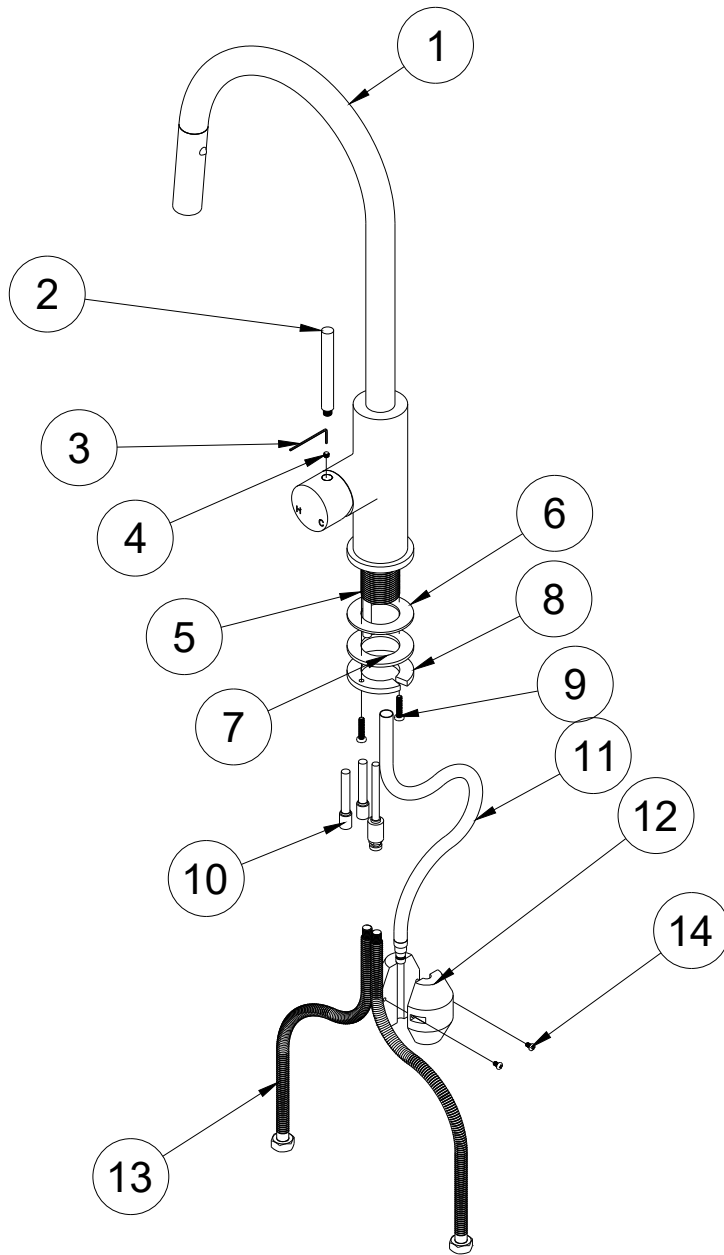

What's in the box

INCLUDED

1x	Gooseneck Tap
1x	Rubber
1x	Washer
1x	Mount Nut
1x	Gravity Ball / Weight
1x	Hot Flexir Hose
1x	Cold Flexir Hose

EXPLODED VIEW

- ① Gooseneck Tap
- ② Pin Handle
- ③ Mini Hex Wrench
- ④ Grub Screw
- ⑤ Thread Tube
- ⑥ Rubber
- ⑦ Washer
- ⑧ Mount Nut
- ⑨ Fixing Screws
- ⑩ Inlet Hose
- ⑪ Pullout Hose
- ⑫ Gravity Ball
- ⑬ Flexir Hose
- ⑭ Gravity Ball Screws

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

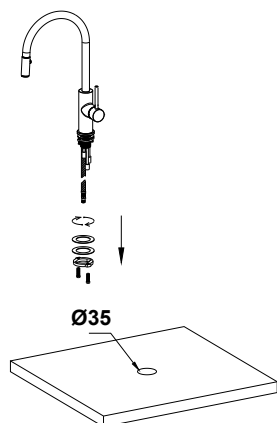

Insert Mixer

Feed the hoses and pull-out line through the benchtop. Position the mixer in the hole and align correctly.


02

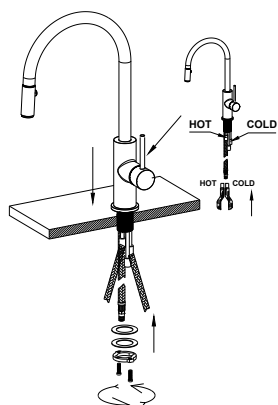

Secure Mixer

From underneath, install the fixing hardware and tighten. Ensure the mixer is straight before final tightening.


03

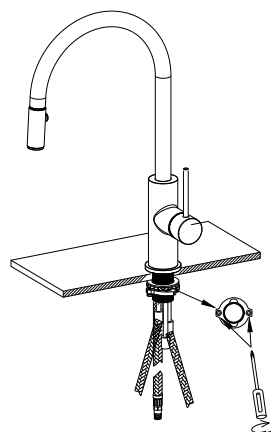

Connect Water

Attach the hoses to the isolation valves: Hot to Hot, Cold to Cold. Connect the pull-out hose to the outlet connection. Ensure all connections are tight.

04

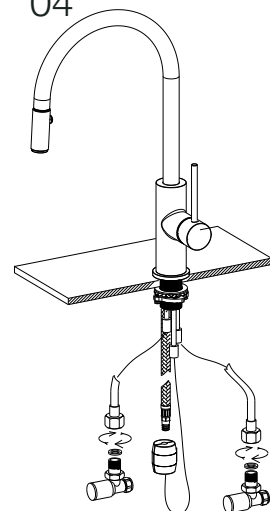

Fit Hose Weight

Attach the weight to the pull-out hose. Test the pull-out movement and adjust the weight position until the hose retracts smoothly.



FINAL CHECK · TURN ON & TEST

Turn on the water and check for leaks, ensuring the mixer and pull-out hose operate correctly.. Do not seal or tile until the tap is fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

4 STAR · 6.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4