


The installation instruction apply for below products :

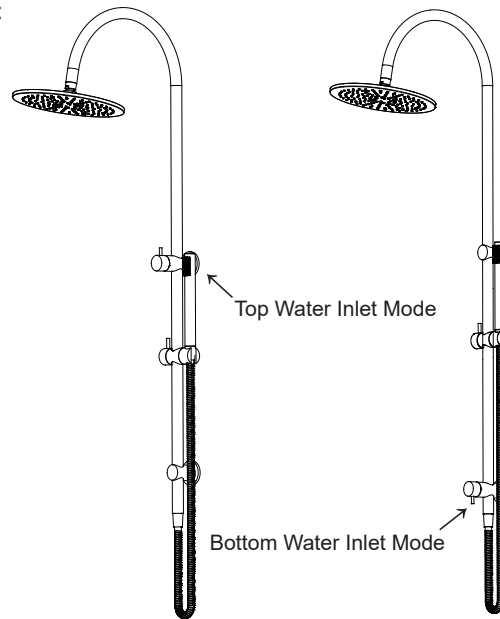

Important Information

It is recommended that this product is installed by a qualified professional.

Please remove all packaging and check this product to ensure it has not been damaged or any parts are missing.

Before installing please make sure this is the correct model and you have all the parts required for installation and usage.

The printed picture is for reference only, this product is according to the actual goods.

Please check all the accessories are present.

Always read these instructions carefully and keep for future reference

Operating Information

Operating Pressure

Minimum operating pressure 0.5 bar

Maximum operating pressure 8 bar

Pre-Installation

1. Before installing the Shower set, flush through the pipe work to remove any debris & other impurities that can enter the Shower set.
2. Turn off water supply at the isolation valves before commencing with work.

Warranty Requirements

For full warranty terms and conditions please visit the warranty section of our website.

Please pay attention to the below. Failure to do so will void your warranty:

1. Do not use acid cleansers
2. Do not use abrasive cleansers
3. Do not use abrasive cloths

Maintenance & Care

To avoid damage it is necessary to consider the below guidelines.

1. To clean the Shower set surface use clean hot soapy water. ONLY use soft fabric cloths.
2. DO NOT use cleaning solutions that contain hydrochloric acid, formic acid, concentrated caustic soda, chlorine or acetic acid as they can cause considerable damage.
3. DO NOT use any coarse cleaning powders or brushed to clean the Shower set.
4. If there is irregular water pressure & water flow is reduced, please check if the spout is clean, if not brush the spout after vinegar soaking.

PLEASE MAKE SURE YOU FULLY TEST YOUR PRODUCT BEFORE TILING ETC.
WE WILL NOT BE RESPONSIBLE FOR ANY COSTS INVOLVED IN REMOVAL OF
THE SHOWER SET IF YOU FIND THERE IS A FAULT.


Installation

Get all accessories ready according to picture.

1. Measure the desired position for the slide rail kit, drill pilot hole. Ensure pipe work is the correct distance apart for this product.
2. Put wall plugs into pilot hole and secure fixings into place.
3. Secure the slide rail kit to the fixings, please put plates on first. Fit the valve and connect the pipework, Check for any leaks. (The bottom water inlet mode adds two accessories. Please pay attention when installing them.)
4. Connect the shower arm and shower head. Then connect the hand shower hose & head,

Installation steps

Top Water Inlet Mode:

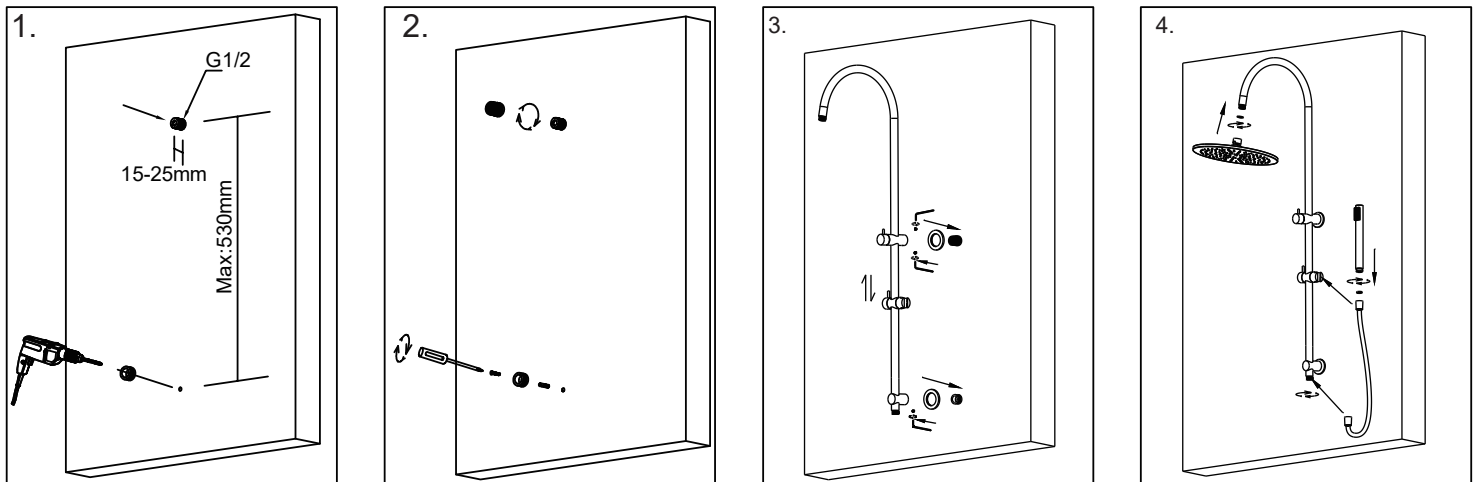

Bottom Water Inlet Mode:

