rainco

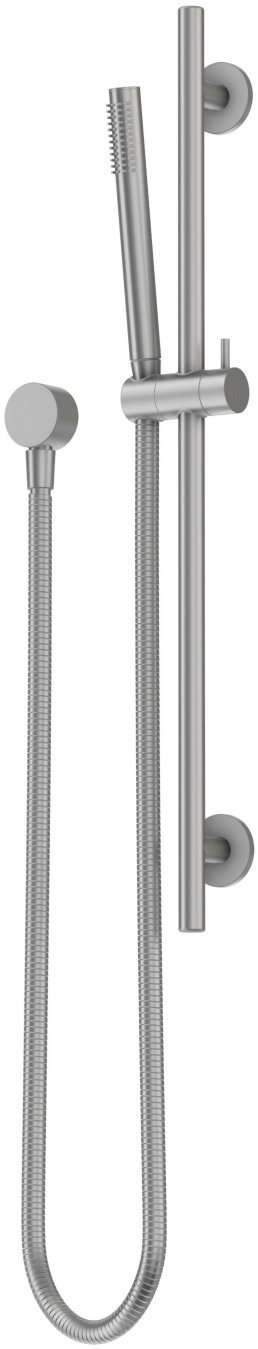

SIMPLE GESTURES. EVERYDAY EASE

HAND WAND WITH ADJUSTABLE RAIL

AT A GLANCE

BEST FOR	FEEL	INSTALLATION
Ideal for everyday use — whether you're rinsing down, resetting, or washing the kids after a long day	Smooth height-adjustable slider, this rail adapts to every user and every routine	Wall-mounted, plumber required

rainco

Front View · Side View

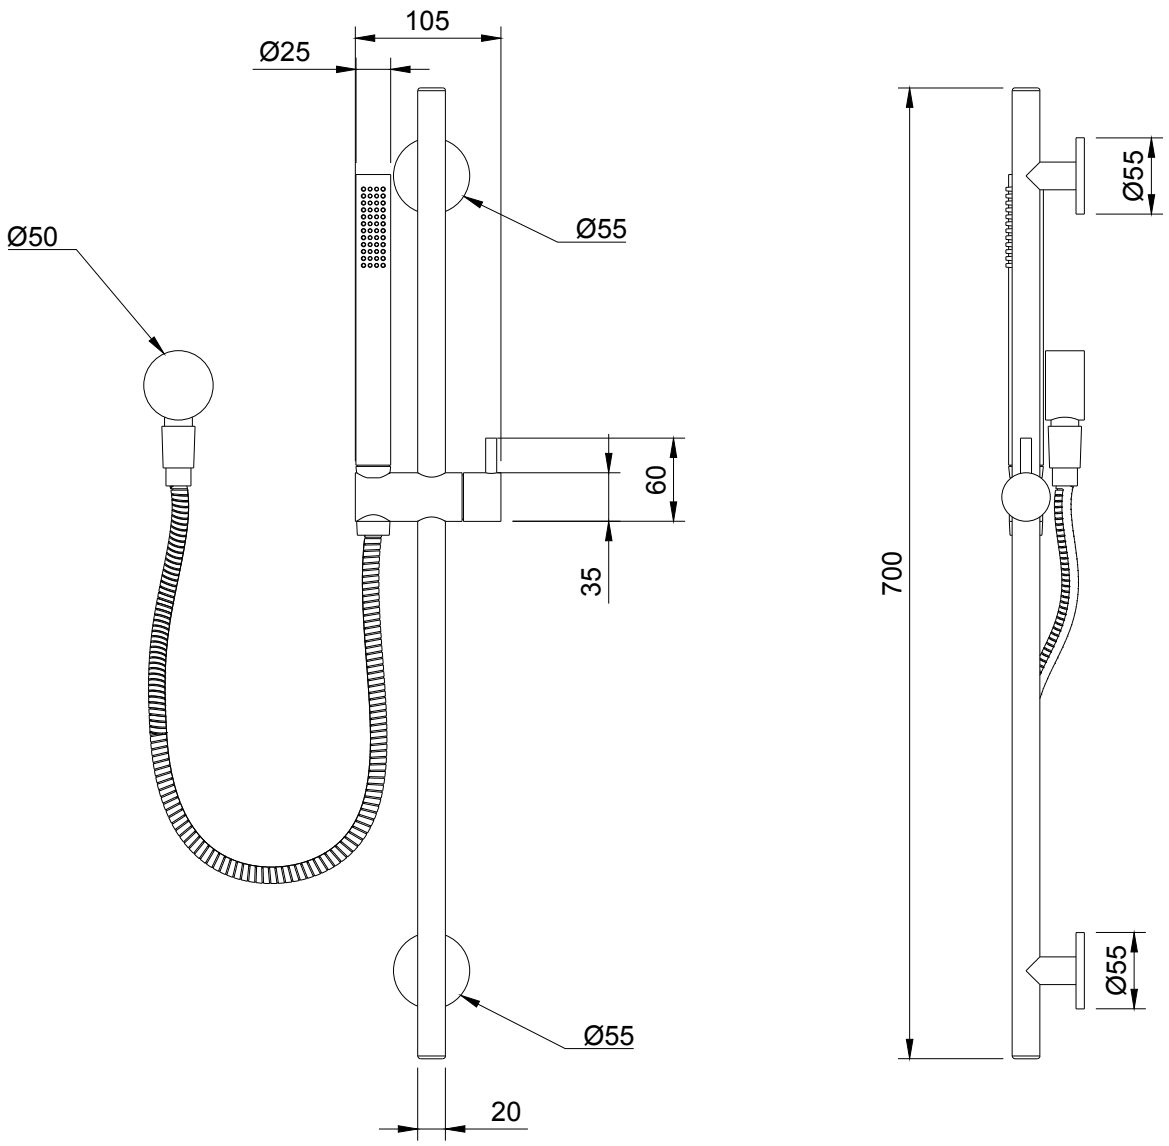

Specifications

MATERIAL

Solid Lead Free **DZR** Brass
Wand Hose Material:
Stainless Steel 304 **(SS304)**

FLOW RATE

8.5 L/min · WELS 3 Star

PRESSURE RANGE

50–800 kPa

MOUNTING

Wall-mounted

DIMENSIONS

Shower wand diameter **Ø25 mm** · Shower wand length **200 mm** · Overall length **700 mm** · Wall projection **50 mm**

rainco

Exploded View

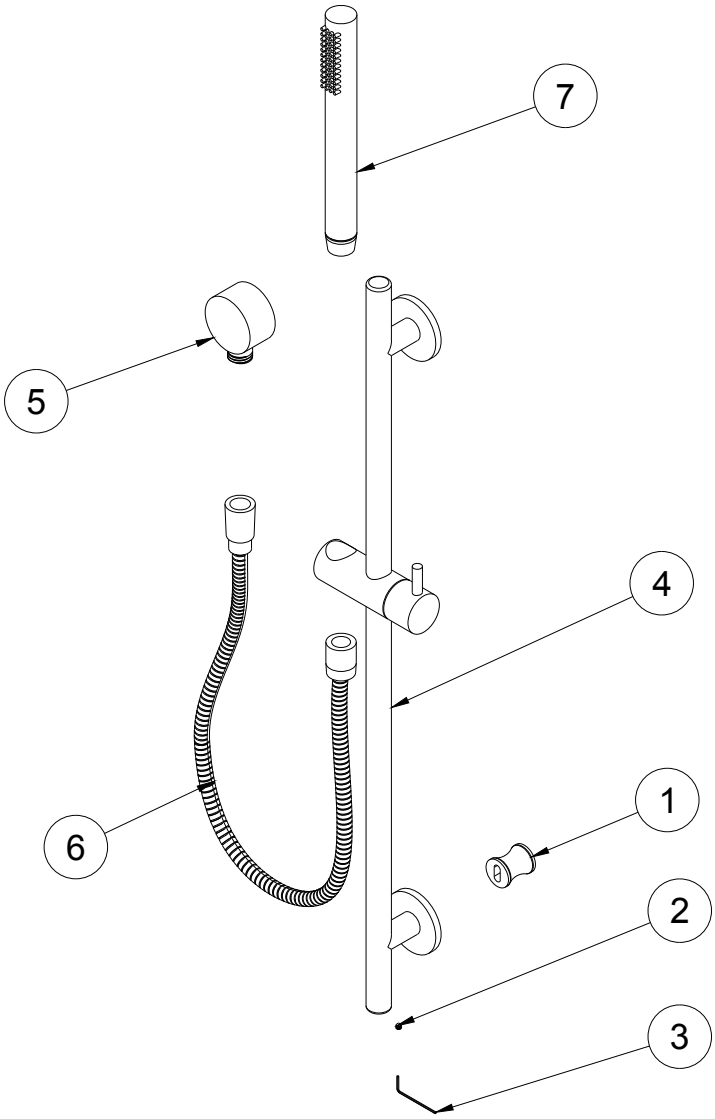

What's in the box

INCLUDED

1x	Shower Wand
1x	Adjustable Hand Shower Bracket
2x	Wall Mounts
2x	Fixing Screws
2x	Hollow Wall Anchors
2x	Cover Rings
1x	150cm Metal Hose
1x	Spare Rubber Washer
1x	Spare Grub Screw

EXPLODED VIEW

1. Wall Mounting
2. Grub Screw
3. Mini Hex Wrench
4. Adjustable Rail
5. Water Connection
6. Hand Wand Hose
7. Shower Wand

Finish Options

Antique Brass	Brushed Nickel	Brushed Brass	Brushed Copper	Gun Metal
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500

01

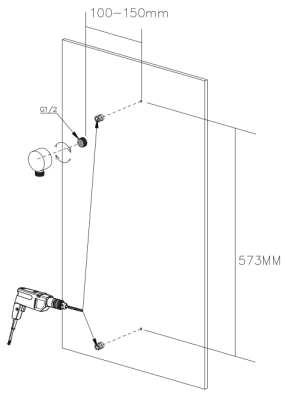

Mark Wall Fixings

Mark the positions for the wall fixings on the wall. Refer to the image above for the measurements. Screw the water outlet cover into place.

02

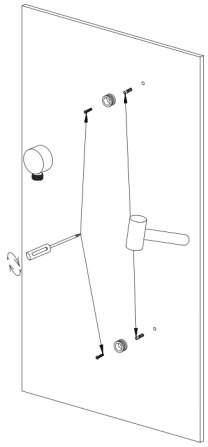

Install Wall Mountings

Fix the wall mountings to the wall using the fixing screws.

03

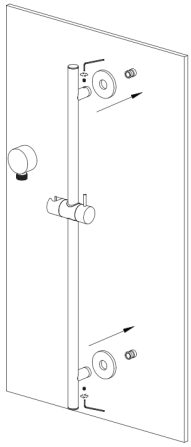

Attach Main Body

Place the main body onto the wall fixings. Tighten the grub screw with the Allen key to secure it in place.

04

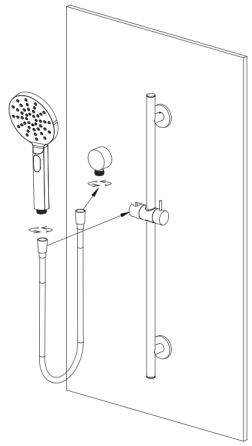

Connect Hose

Connect one end of the hose to the water outlet and the other end to the round wand.

FINAL CHECK · TURN ON & TEST

Do not seal or tile until the tested and confirmed leak-free.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

3 STAR · 8.5 L/MIN

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4