rainco



REFINED FUNCTION, ENDURING BEAUTY


# HAVEN BATH FILLER WITH MIXER

AT A GLANCE

| BEST FOR | HEIGHT | FEEL | INSTALLATION |
|---|---|---|---|
| Enhancing your bath experience | Stands tall with its curved spout and integrated mixer | Effortless control and handling | Floor-mounted, plumber required |

rainco

## Back View · Side View

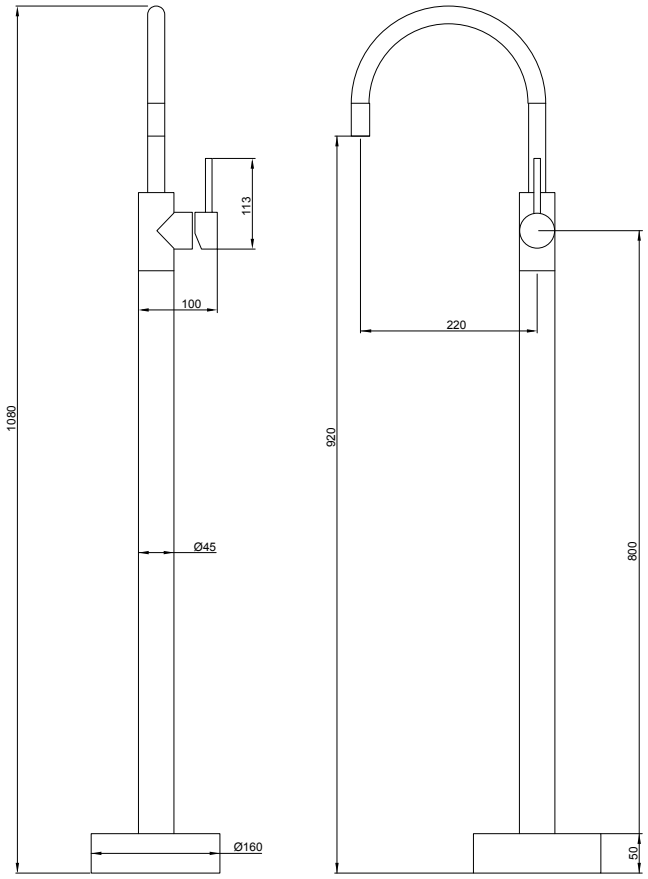


## Specifications

MATERIAL

**Lead-free** Solid Brass

PRESSURE RANGE

**50–800 kPa**

CONNECTIONS

Standard **G1/2”**

MOUNTING

Floor-mounted

DIMENSIONS

Overall Height **1080 mm**
Body diameter **Ø45 mm**
Base Plate Diameter **Ø160 mm**
Mixer height **113 mm**

## What’s in the box

INCLUDED

| | |
|---|---|
| **1x** | Bath Rail |
| **1x** | Filler with Mixer |
| **1x** | Floor Plate |
| **1x** | Mixer Body |
| **1x** | Fixing Bracket |
| **2x** | Flexi Hose |
| **4x** | Fixing Screws |
| **1x** | Aerator Remover Tool |
| **1x** | Mini Hex Wrench |

## Finish Options


| **Antique Brass** | **Brushed Nickel** | **Brushed Brass** | **Brushed Copper** | **Gun Metal** |
|---|---|---|---|---|
| AEA | AEA | PVD | PVD | PVD |

rainco

# Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



### Assemble the Tap Body

Position the main tap body and mark the mounting holes. Ensure the tap is positioned correctly before drilling.


02

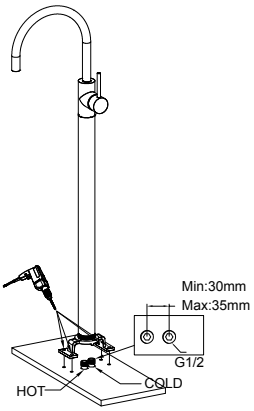


### Prepare the Water Connections

Unscrew the tap body and connect the hot (red) and cold (blue) flexible hoses to the main body. Ensure the connections are secure.


03

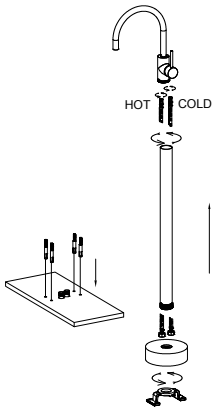


### Install the Tap Body

Reassemble the tap and place it into the mounting holes. Connect the hot and cold hoses to their corresponding water supplies. Check all connections for leaks.

04

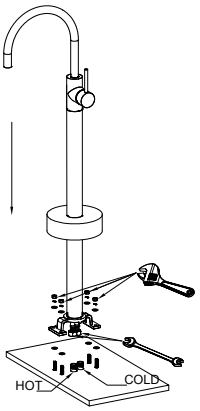


### Secure the Tap

Fit the mounting plate and washers underneath the benchtop. Tighten the fixing nuts and screws to secure the tap firmly in place. Connect the hand shower to the main tap body and check that everything is secure.

**IMPORTANT**

Turn on the water supply and test the product for leaks before completing any tiling or finishing work. Rainco will not be responsible for costs associated with removing the product if a fault is found after installation.

## Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

## Compliance

WATERMARK CERTIFIED

AS/NZS 3718

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4