rainco

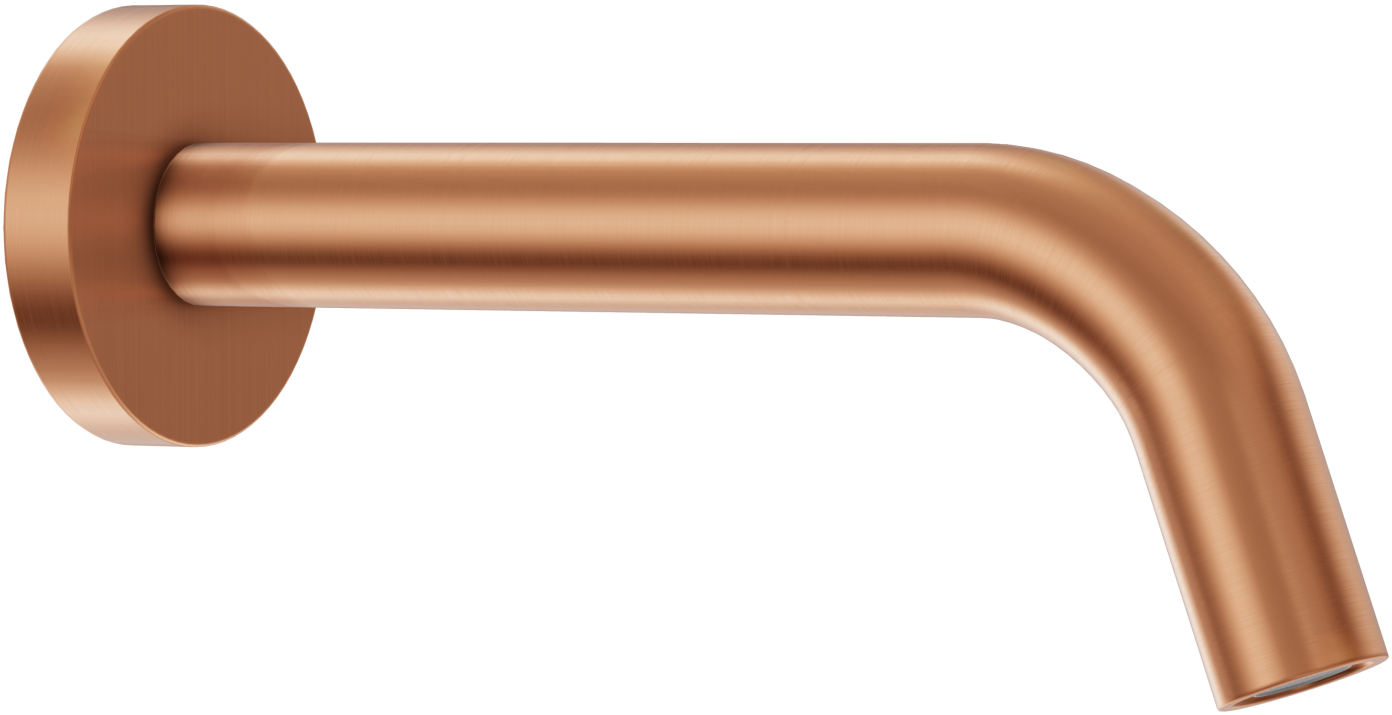

SIMPLE FORM, LASTING IMPRESSION

HAVEN BATH SPOUT

AT A GLANCE

BEST FOR

Everyday bathrooms for those who value simplicity with substance

FEEL

Smooth and Steady

INSTALLATION

Wall-mounted, plumber required

rainco

Front View · Side View

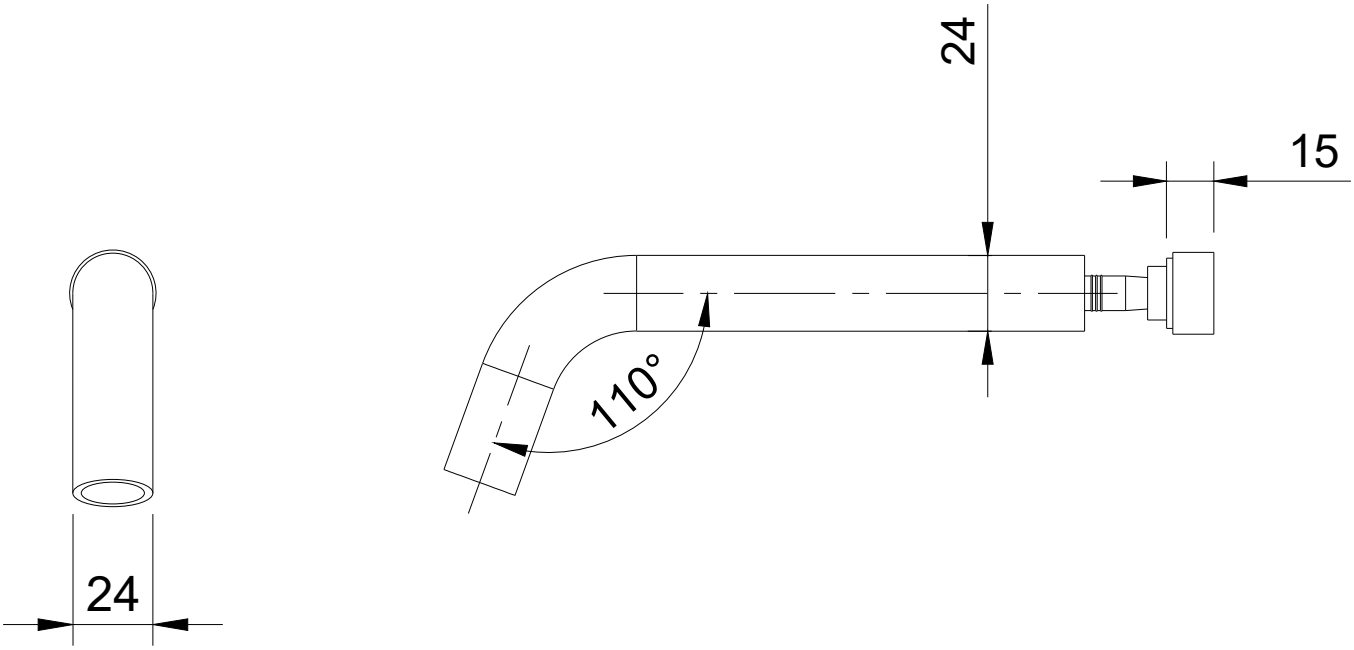

Specifications

MATERIAL

Solid **DZR** Lead-free Brass

FLOW RATE

8 L/min · WELS 3 Star

PRESSURE RANGE

150–500 kPa

TEMPERATURE

4–80 °C

CONNECTIONS

Standard **G1/2”**

MOUNTING

Wall-mounted · cut-out **Ø25 mm**

DIMENSIONS

Spout diameter **Ø24 mm** · thickness **12 mm**

rainco

Exploded View

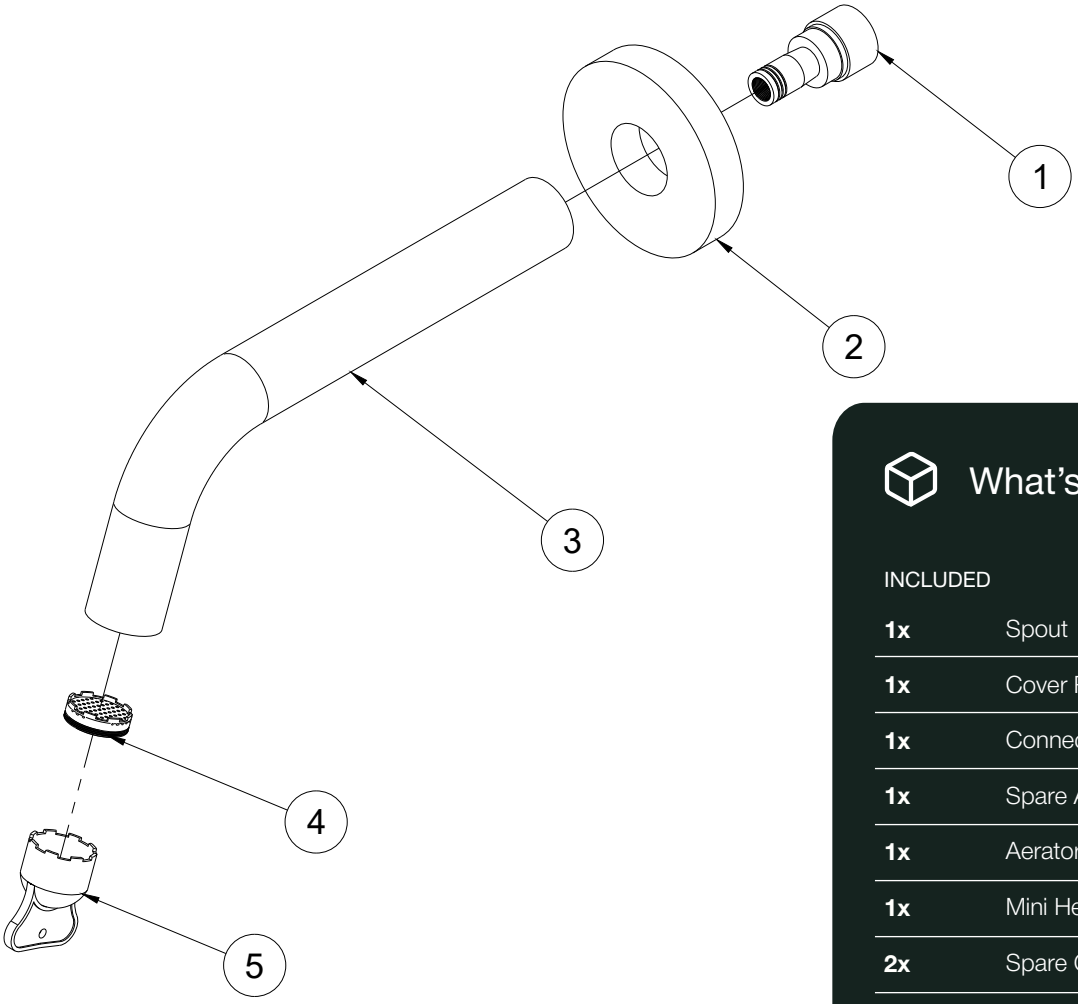

What's in the box

INCLUDED

1x	Spout
1x	Cover Ring
1x	Connection Screw
1x	Spare Aerator
1x	Aerator Remover Tool
1x	Mini Hex Wrench
2x	Spare Grub Screws

EXPLODED VIEW

1. Connection Screw
2. Cover Ring
3. Spout
4. Aerator
5. Aerator Remover Tool

Finish Options

Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500

01

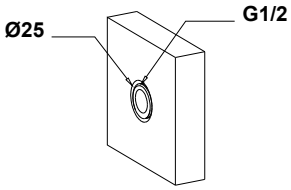

Check Outlet

Confirm that the wall outlet has a standard G1/2 connection and that the tile cut-out is greater than Ø25 mm.

02

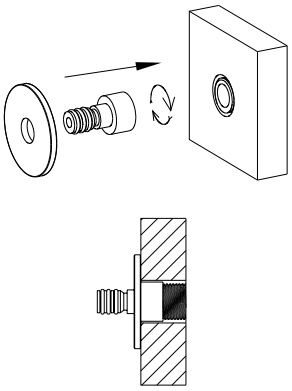

Install Connection

Position the cover ring first. Screw the connection fitting into the G1/2 wall outlet and tighten it securely.

03

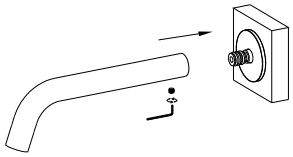

Attach Spout

Slide the spout body onto the installed connection. Align the spout correctly, then tighten the grub screw using the mini hex wrench.

04

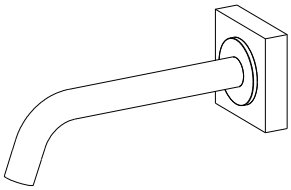

Check Installation

Confirm that the spout is secure, correctly aligned and sitting flush against the finished wall.

FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the spout has been fully tested and confirmed leak-free.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

3 STAR · 8 L/MIN

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4