

EFFORTLESS WATER CONTROL

HAVEN CONCEALED DIVERTER WALL MIXER

AT A GLANCE



BEST FOR

Everyday bathroom
and shower




FEEL

Precise switching between
a rain shower and hand
wand, or between a bath
spout and shower



INSTALLATION

Wall-mounted,
plumber required

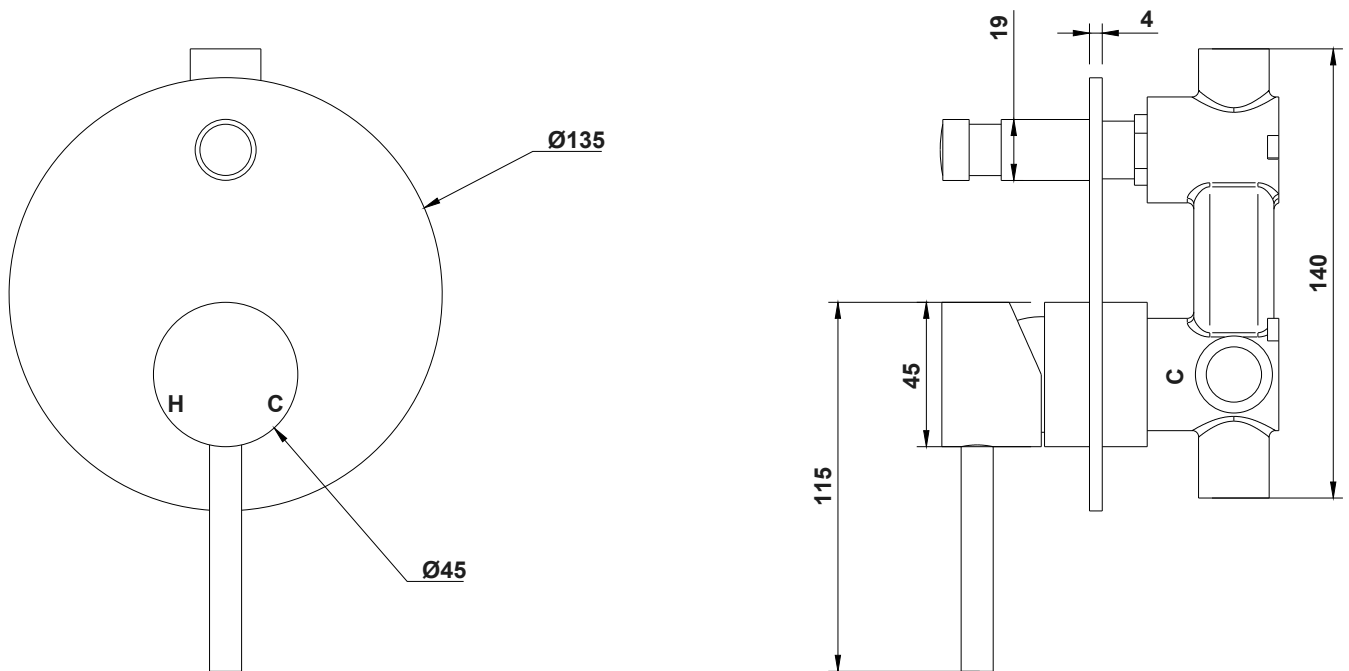

Specifications



MATERIAL

Lead-free Solid **DZR** Brass



CARTRIDGE

Citec ceramic cartridge



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**



MOUNTING

Wall-mounted · cut-out **$\varnothing 25$ mm, $\varnothing 45$ mm**



DIMENSIONS


Overall height **140 mm** · Cover diameter **$\varnothing 135$ mm**
Tap handle **115 mm**



What's in the box

INCLUDED

1x	In-wall Body
1x	Tap Handle
1x	Diverter Knob
1x	Cover Plate
3x	Fixing Screws
3x	Hollow Wall Anchors
1x	Spare Grub Screw
1x	Mini Hex Wrench

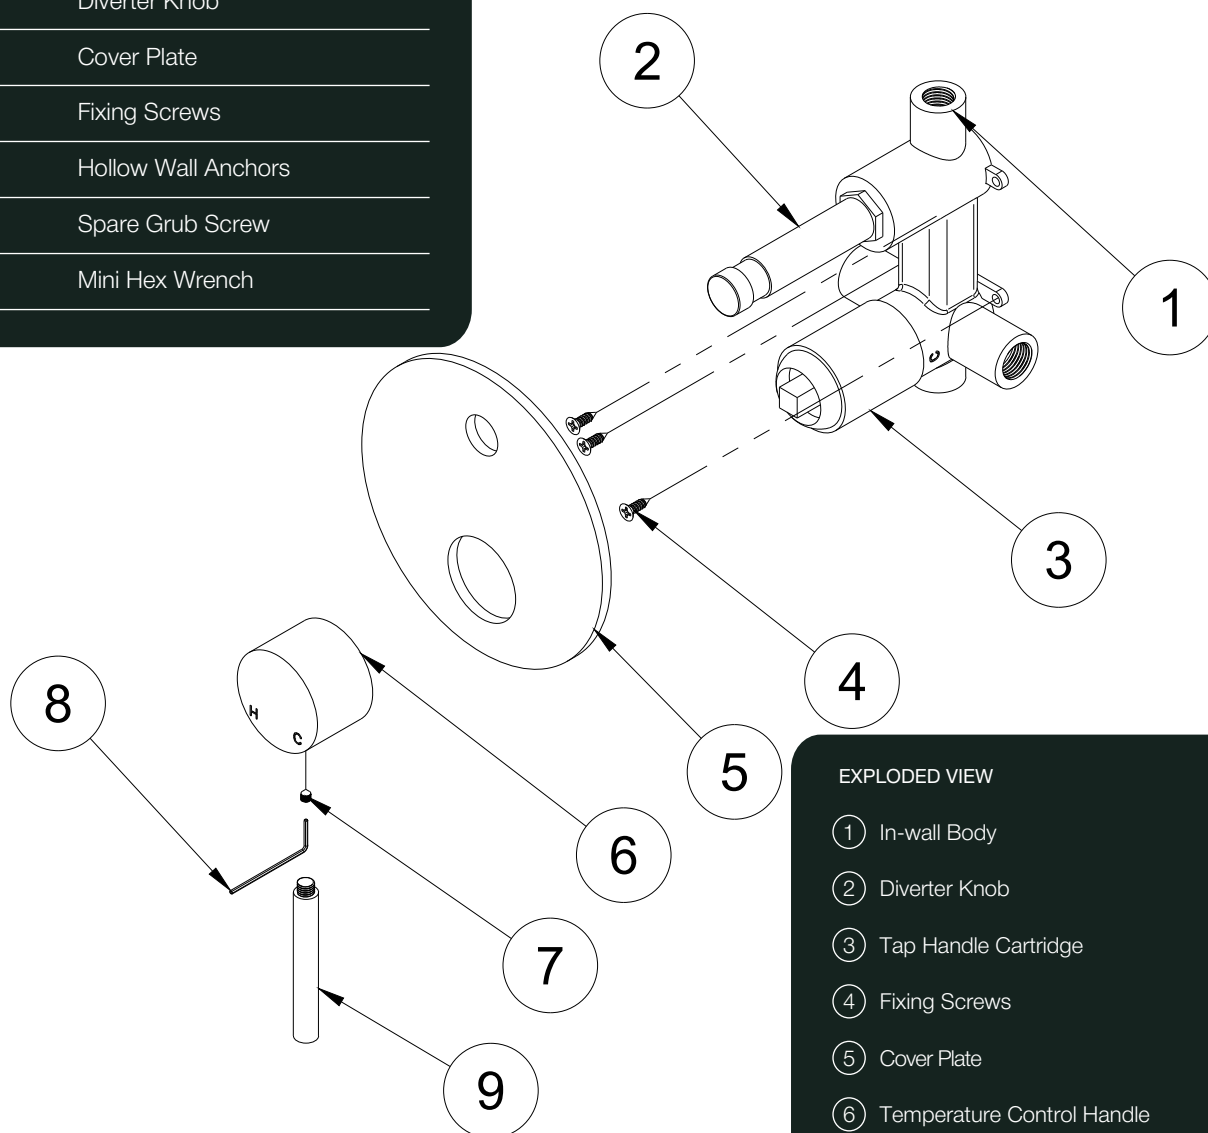

EXPLODED VIEW

- ① In-wall Body
- ② Diverter Knob
- ③ Tap Handle Cartridge
- ④ Fixing Screws
- ⑤ Cover Plate
- ⑥ Temperature Control Handle
- ⑦ Grub Screw
- ⑧ Mini Hex Wrench
- ⑨ Pin Lever

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

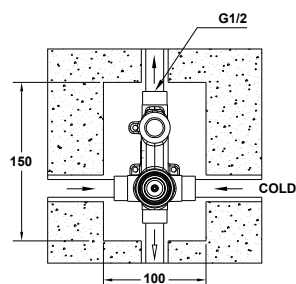

Insert Body

Keep the protective covers in place during installation to avoid damage to the cartridge.


02

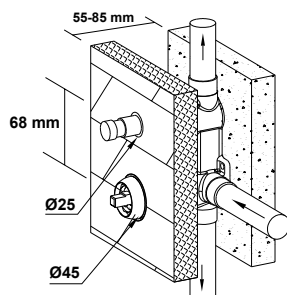

Connect Water Supply

Connect the hot water inlet on the left and the cold water inlet on the right, as viewed from the front. Turn on the water supply and test all connections for correct operation and leaks.


03

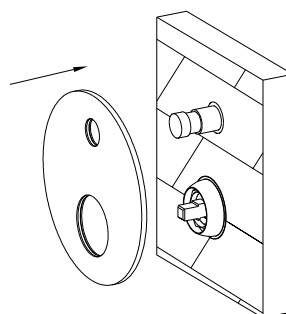

Complete wall finish

Once testing is successful, proceed with wall finishing (e.g. tiling). Cut required openings to suit the mixer: Ø25mm and Ø45mm.

04

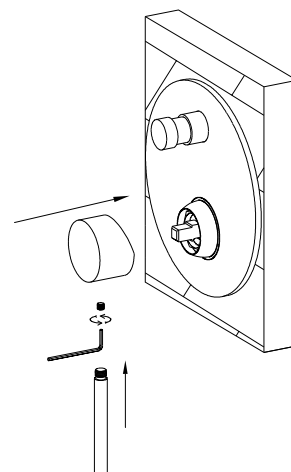

Install trim and handles

Fit the cover plate over the mixer body. Install the handle and diverter, then secure using the grub screws with an Allen key from underneath.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and check the mixer, diverter and all outlets for correct operation and leaks.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use a soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

4 STAR · 6.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4