



REFINED SHAPE, FLAWLESS FUNCTION

HAVEN GOOSENECK MIXER

AT A GLANCE



BEST FOR

Everyday kitchens,
family use



HEIGHT

Balanced for
overhead clearance
without dominating
the space





FEEL

Smooth and precise
temperature and
pressure Control



INSTALLATION

Bench-mounted,
plumber required

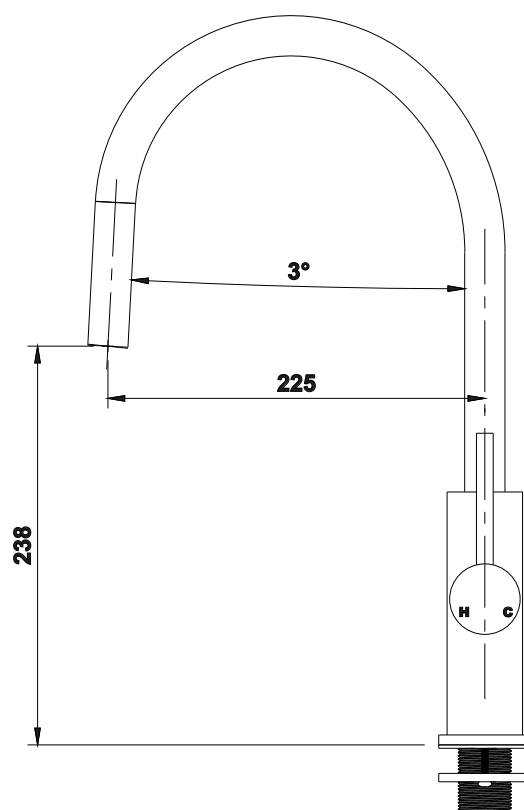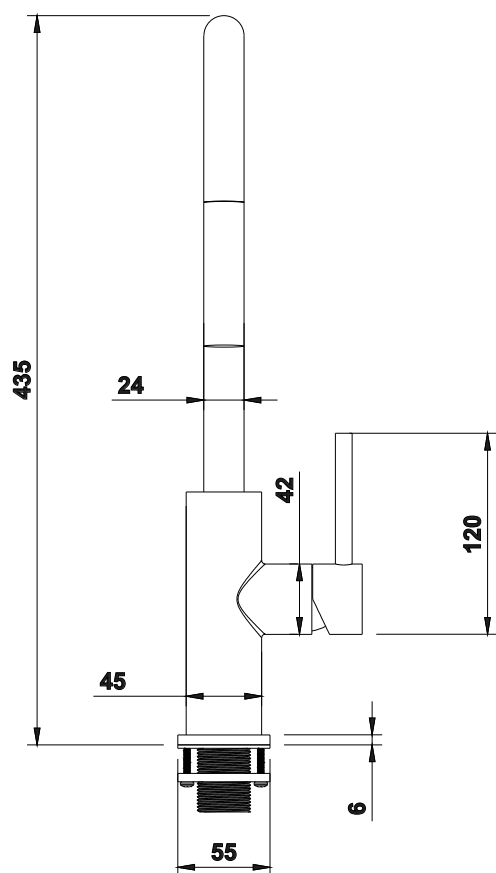

Specifications



MATERIAL

Lead-free **DZR** Brass



CARTRIDGE

Citec ceramic cartridge · **Ø33 mm**



FLOW RATE

6.5 L/min · WELS 4 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Bench-mounted · cut-out **Ø35 mm · Ø38 mm**



DIMENSIONS

Overall height **435 mm** · spout **Ø24 mm**

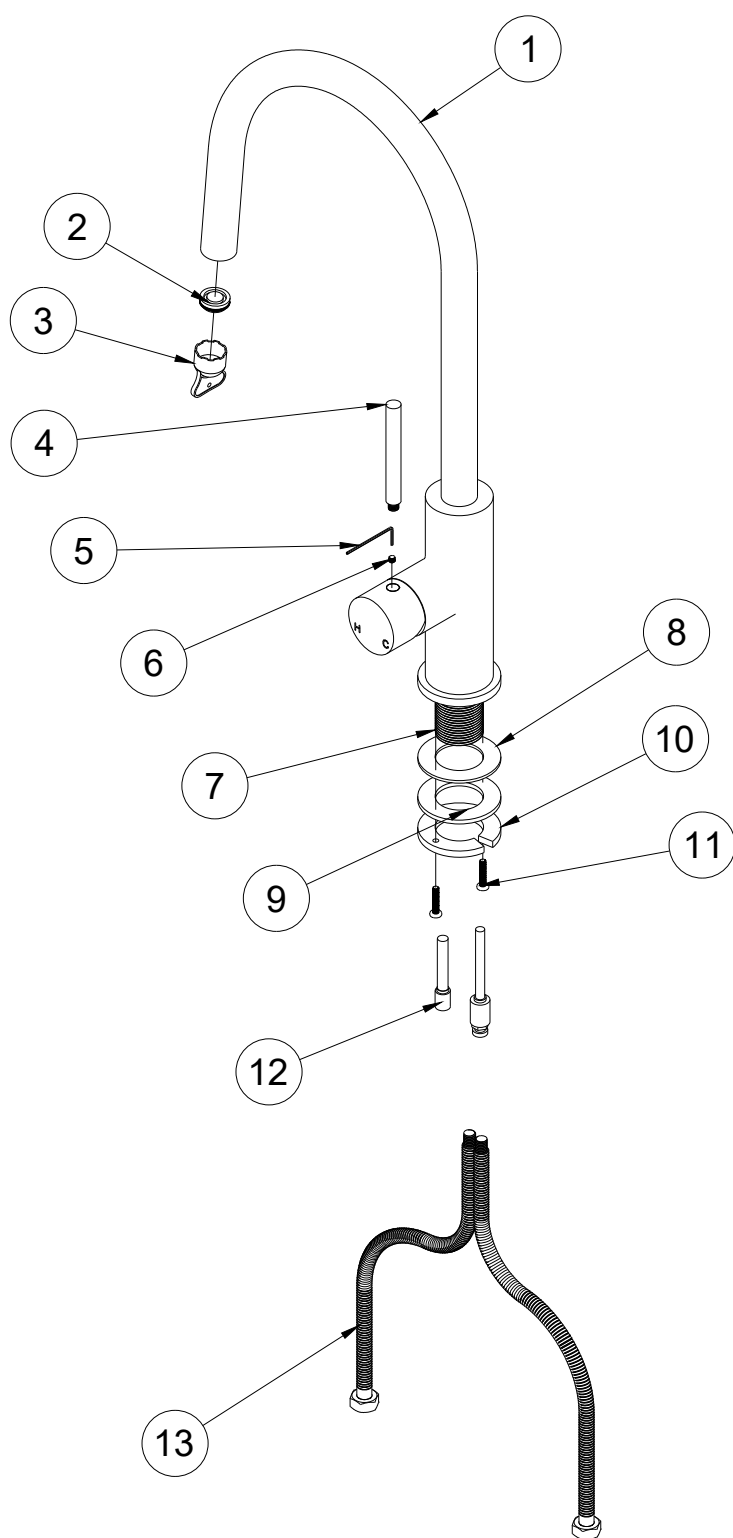

What's in the box

INCLUDED

1x Gooseneck Tap

3x Washers

1x Hot Metal Hose

1x Cold Metal Hose

2x Fixing Screws

1x Aerator Remover Tool

1x Hollow Wall Anchors

1x Spare Grub Screw

1x Mini Hex Wrench

EXPLODED VIEW

① Gooseneck Tap

② Aerator

③ Aerator Remover Tool

④ Pin Lever

⑤ Grub Screw

⑥ Mini Hex Wrench

⑦ Thread Tube

⑧ Rubber

⑨ Washer

⑩ Mount Nut

⑪ Fixing Screws

⑫ Connections

⑬ Flexir Hose

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

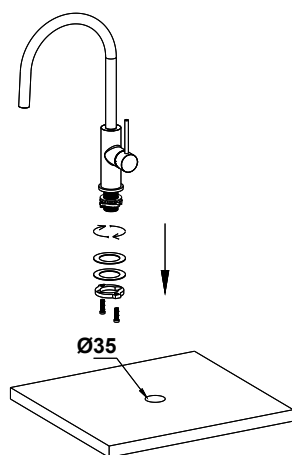

Insert Mixer

Feed hoses through the benchtop. Position mixer into hole (Ø35mm - Ø38mm) and align correctly.

02

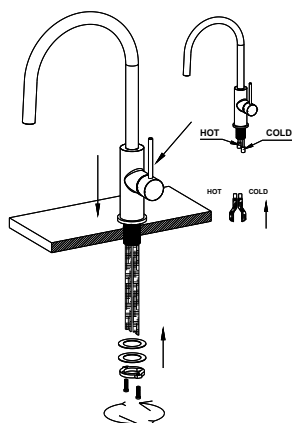


Connect Water

Attach hoses to isolation valves:

- Hot to Hot
 - Cold to Cold
- Do not twist hoses.


03

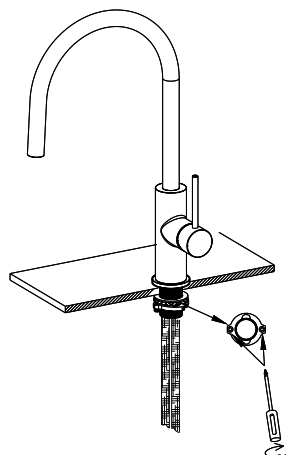

Turn On Water

Slowly open isolation valves. Check all connections for leaks.

04

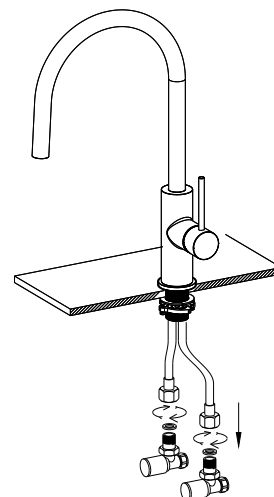

Connect the Water

Connect the red hose to the hot isolation valve and the blue hose to the cold valve.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

4 STAR · 6.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4