



REFINED SHAPE, FLAWLESS FUNCTION

## HAVEN GOOSENECK MIXER

### AT A GLANCE



#### BEST FOR

Everyday kitchens,  
family use



#### HEIGHT

Balanced for  
overhead clearance  
without dominating  
the space





#### FEEL

Smooth and precise  
temperature and  
pressure Control



#### INSTALLATION

Bench-mounted,  
plumber required

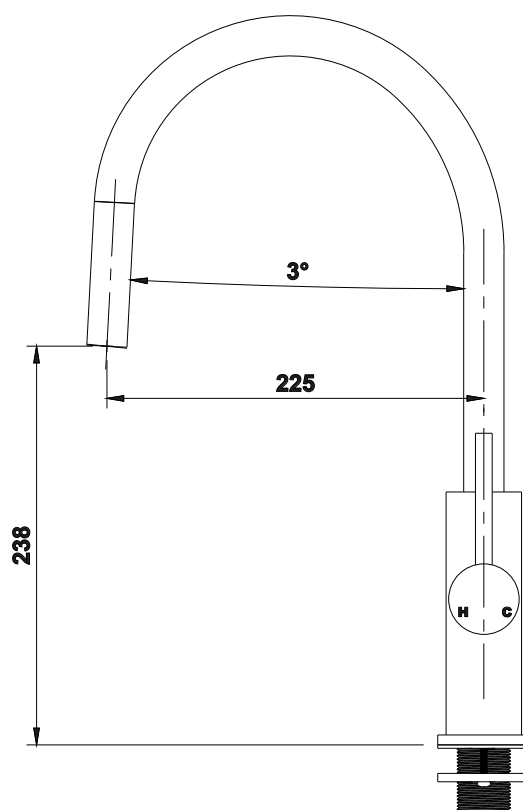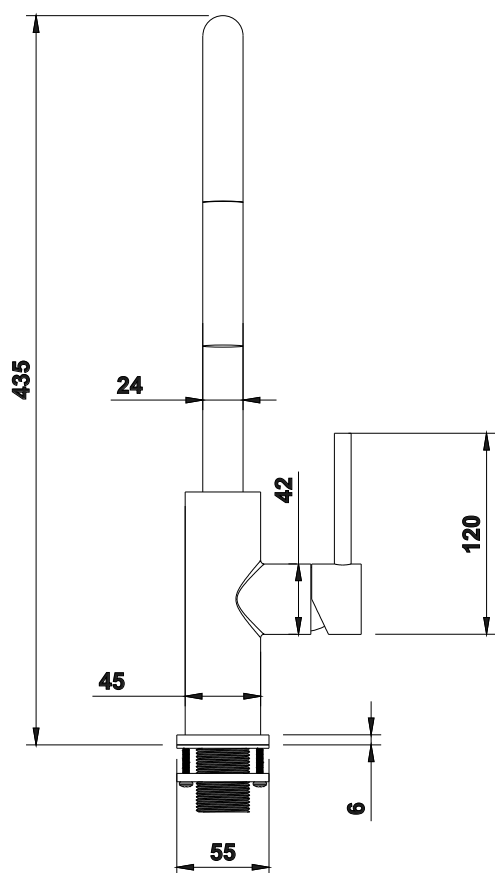

## Specifications



### MATERIAL

Lead-free **DZR** Brass



### CARTRIDGE

Citec ceramic cartridge · **Ø33 mm**



### FLOW RATE

**6.5 L/min** · WELS 4 Star



### PRESSURE RANGE

**50–800 kPa**



### TEMPERATURE

**4–80 °C**



### CONNECTIONS

Standard **G1/2"**




### MOUNTING

Bench-mounted · cut-out **Ø35 mm · Ø38 mm**



### DIMENSIONS

Overall height **435 mm** · spout **Ø24 mm**

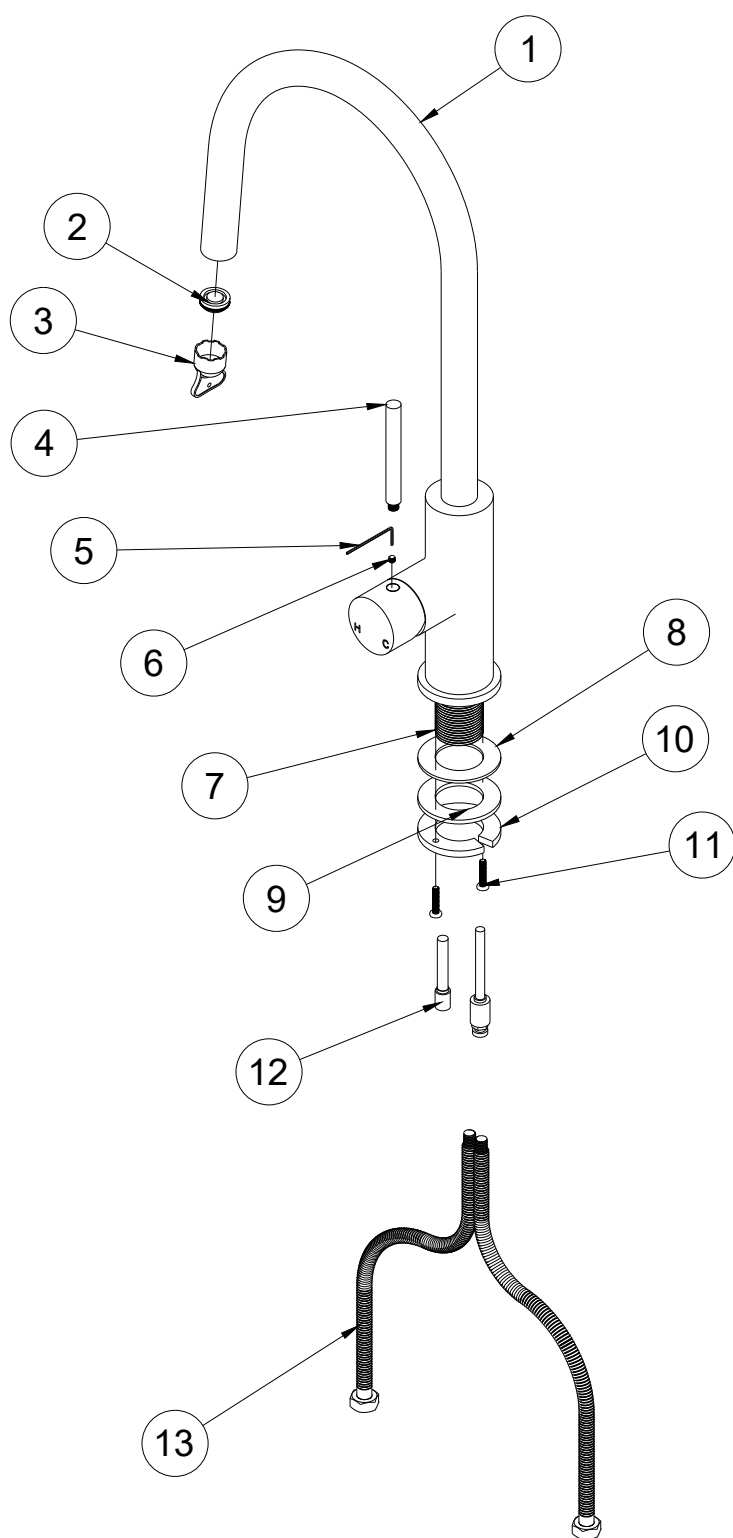

## What's in the box

### INCLUDED

**1x** Gooseneck Tap

**3x** Washers

**1x** Hot Metal Hose

**1x** Cold Metal Hose

**2x** Fixing Screws

**1x** Aerator Remover Tool

**1x** Hollow Wall Anchors

**1x** Spare Grub Screw

**1x** Mini Hex Wrench

### EXPLODED VIEW

① Gooseneck Tap

② Aerator

③ Aerator Remover Tool

④ Pin Lever

⑤ Grub Screw

⑥ Mini Hex Wrench

⑦ Thread Tube

⑧ Rubber

⑨ Washer

⑩ Mount Nut

⑪ Fixing Screws

⑫ Connections

⑬ Flexir Hose

## Finish Options



**Antique Brass**  
AEA



**Brushed Nickel**  
AEA



**Brushed Brass**  
PVD



**Brushed Copper**  
PVD




**Gun Metal**  
PVD

## Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

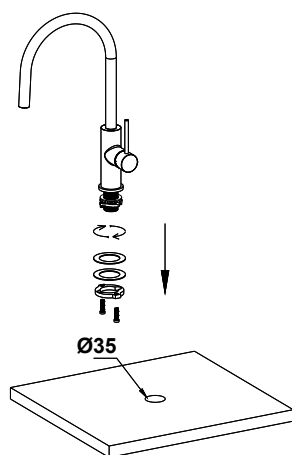

### Insert Mixer

Feed hoses through the benchtop. Position mixer into hole (Ø35mm - Ø38mm) and align correctly.

02

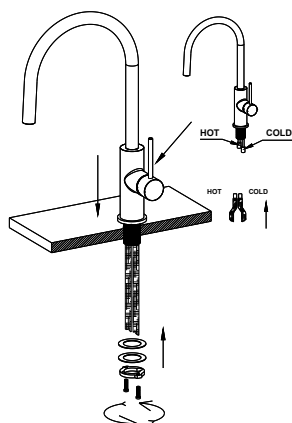


### Connect Water

Attach hoses to isolation valves:

- Hot to Hot
  - Cold to Cold
- Do not twist hoses.


03

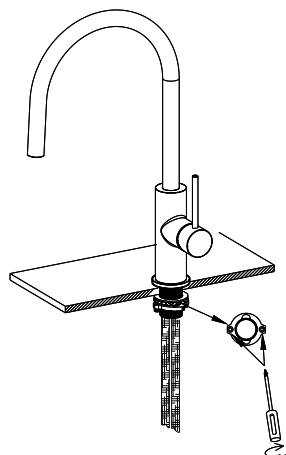

### Turn On Water

Slowly open isolation valves. Check all connections for leaks.

04

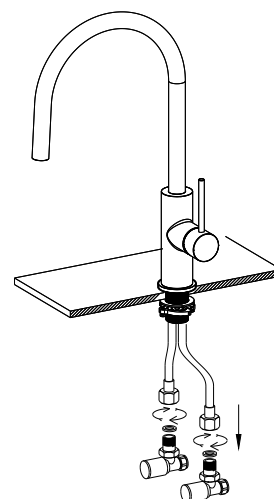

### Connect the Water

Connect the red hose to the hot isolation valve and the blue hose to the cold valve.



### FINAL CHECK - TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

## Care & Maintenance



### MILD SOAP & WARM WATER

Clean with mild soap and warm water.



### SOFT CLOTH ONLY

Use soft cloth only.



### NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

## Compliance



### WATERMARK CERTIFIED

AS/NZS 3718



### WELS APPROVED

4 STAR · 6.5 L/MIN



### NCC LEAD-FREE

LESS THAN 0.25%



### INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4