



STEADY AND SMOOTH MOVEMENT

## HAVEN LAUNDRY PULL OUT MIXER

AT A GLANCE



BEST FOR

Everyday laundry use



HEIGHT

Balanced for overhead clearance without dominating the space





FEEL

Smooth pull-out action for precise rinsing and cleaning, with 360° swivel function



INSTALLATION

Bench-mounted, plumber required

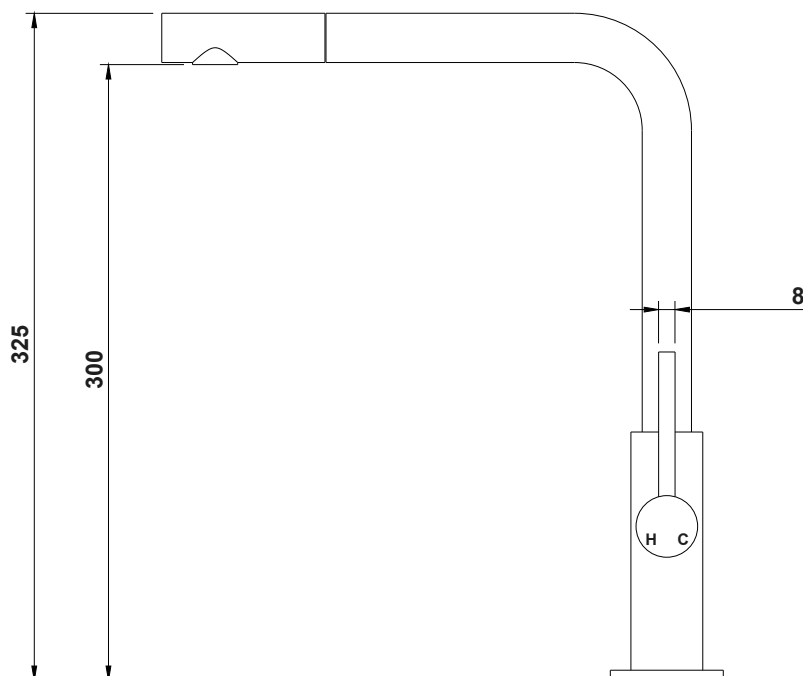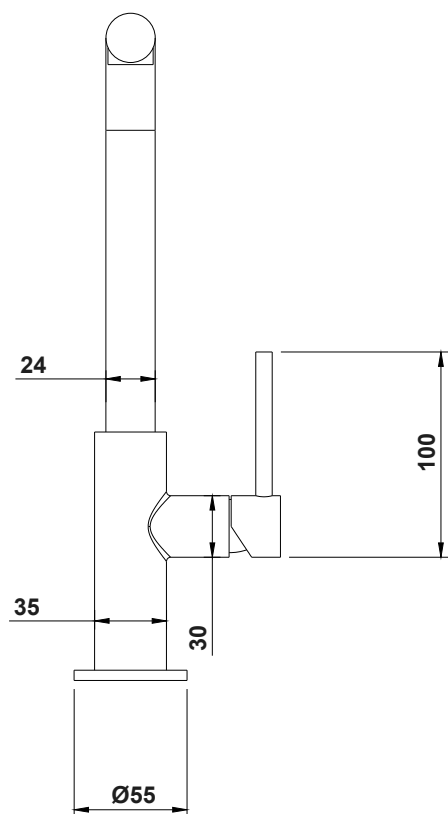

## Specifications



### MATERIAL

Lead-free **DZR** Brass



### CARTRIDGE

Citec ceramic cartridge



### FLOW RATE

**4.5 L/min** · WELS 6 Star



### PRESSURE RANGE

**50–800 kPa**



### TEMPERATURE

**4–80 °C**



### CONNECTIONS

Standard **G1/2"**




### MOUNTING

Bench-mounted · cut-out **Ø35 mm**



### DIMENSIONS

Overall height **325 mm** · spout **24 mm** · body **Ø35 mm**  
· base **Ø55 mm**

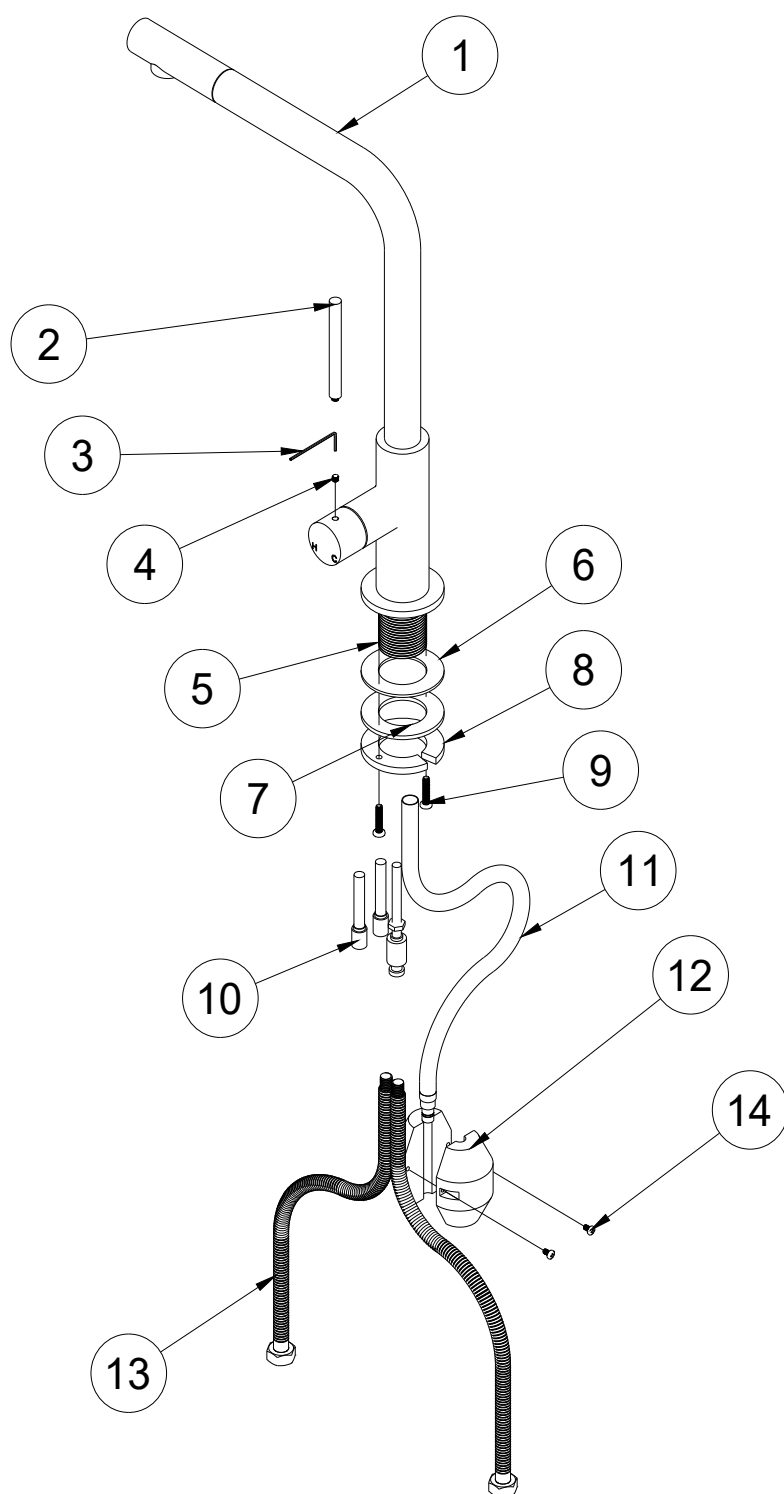

## What's in the box

### INCLUDED

|           |                      |
|-----------|----------------------|
| <b>1x</b> | Laundry Tap          |
| <b>1x</b> | Weight Ball          |
| <b>1x</b> | Rubber Washer        |
| <b>1x</b> | Washer               |
| <b>1x</b> | Mount Nut            |
| <b>1x</b> | Hot Metal Hose       |
| <b>1x</b> | Cold Metal Hose      |
| <b>2x</b> | Screws               |
| <b>1x</b> | Spare Grub Screw     |
| <b>1x</b> | Aerator Remover Tool |

### EXPLODED VIEW

- ① Laundry Tap
- ② Pin Lever
- ③ Mini Hex Wrench
- ④ Grub Screw
- ⑤ Thread Tube
- ⑥ Rubber
- ⑦ Washer
- ⑧ Mount Nut
- ⑨ Fixing Screws
- ⑩ Temperature Connection
- ⑪ Pull-down Hose
- ⑫ Weight Ball
- ⑬ Flexir Hose
- ⑭ Screws

## Finish Options



**Antique Brass**  
AEA



**Brushed Nickel**  
AEA



**Brushed Brass**  
PVD



**Brushed Copper**  
PVD




**Gun Metal**  
PVD

## Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

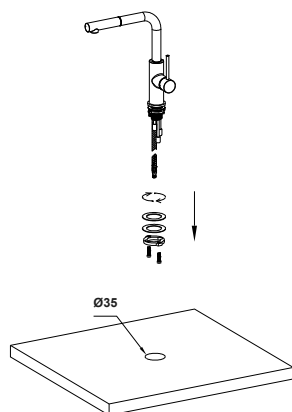

### Insert Mixer

Feed the hoses through the Ø35 mm benchtop cut-out. Position the mixer using the base ring and align it correctly.


02

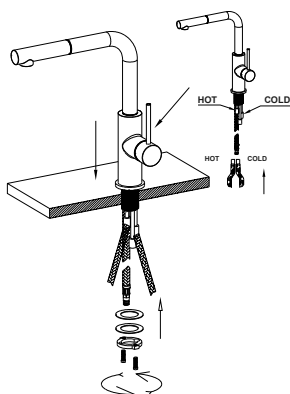

### Secure Mixer

From underneath, install the rubber washer, washer and mount nut. Tighten the fixing screws and ensure the mixer is straight and secure.


03

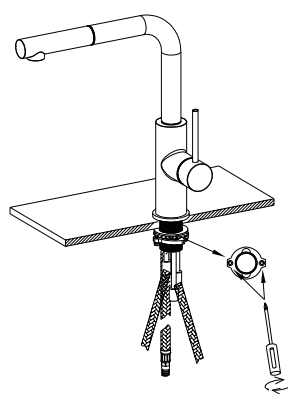

### Install Weight Ball

Fit the weight ball to the pull-down hose in the position shown. Secure it correctly and make sure the hose can move freely.

04

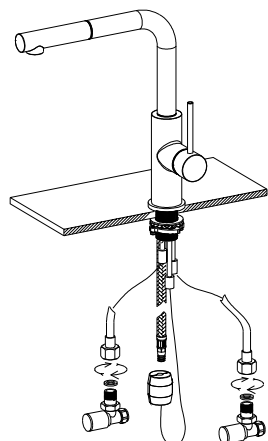

### Connect Water

Connect the red hose to the hot isolation valve and the blue hose to the cold isolation valve. Do not twist or kink the hoses.



### FINAL CHECK · TURN ON & TEST

Slowly turn on the water supply. Run hot and cold water and test the handle, water flow and pull-out function. Check all connections for leaks. Do not seal or tile until the mixer is fully tested.

## Care & Maintenance



### MILD SOAP & WARM WATER

Clean with mild soap and warm water.



### SOFT CLOTH ONLY

Use soft cloth only.



### NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

## Compliance



### WATERMARK CERTIFIED

AS/NZS 3718



### WELS APPROVED

6 STAR · 4.5 L/MIN



### NCC LEAD-FREE

LESS THAN 0.25%



### INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4