

EFFORTLESS WATER CONTROL

HAVEN MINIMAL DIVERTER WALL MIXER

AT A GLANCE



BEST FOR

Everyday bathroom
and shower





FEEL

Precise switch between
a rain shower and hand
wand or a bath spout
and shower



INSTALLATION

Wall-mounted,
plumber required

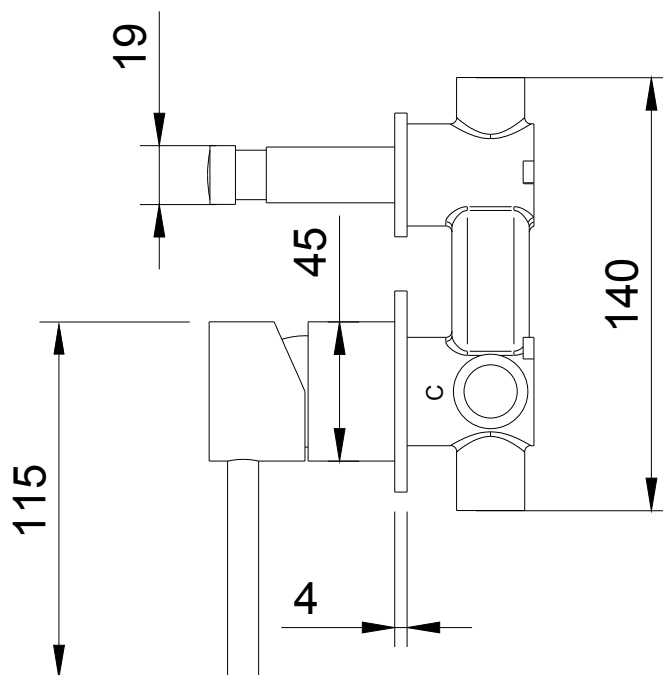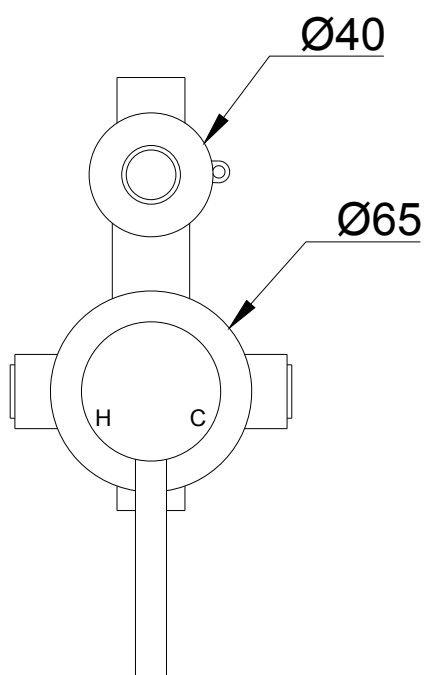

Specifications



MATERIAL

Solid **Lead-free** Brass Construction



CARTRIDGE

Citec ceramic cartridge



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**



MOUNTING

Wall-mounted · Tile cut-out **$\varnothing 25$ mm, $\varnothing 50$ mm**



DIMENSIONS


Rings' thickness **4 mm** · In-wall Height **140 mm**



What's in the box

INCLUDED

1x	In-wall Body
1x	Tap Handle
1x	Diverter Knob
2x	Cover Rings
3x	Fixing Screws
3x	Hollow Wall Anchors
1x	Spare Grub Screw
1x	Mini Hex Wrench

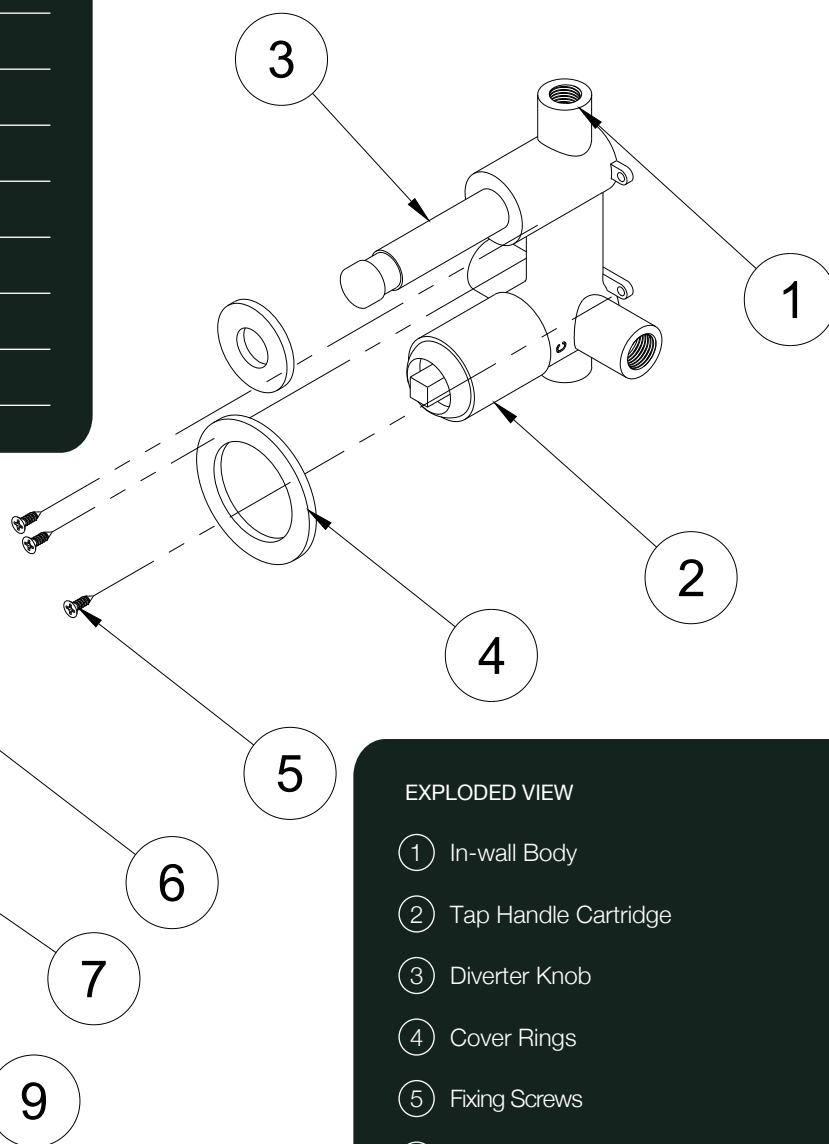

EXPLODED VIEW

- ① In-wall Body
- ② Tap Handle Cartridge
- ③ Diverter Knob
- ④ Cover Rings
- ⑤ Fixing Screws
- ⑥ Temperature Control Handle
- ⑦ Grub Screw
- ⑧ Mini Hex Wrench
- ⑨ Pin Lever

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Insert Body

Position the in-wall body at the required depth. Keep the protective covers fitted during installation to avoid damage to the cartridge.


02



Connect Water Supply

Connect the hot water inlet on the left and the cold water inlet on the right when viewing the mixer from the front.


03



Complete wall finish

Once the mixer has been fully tested and no leaks have been detected, complete the wall finish or tiling.

04

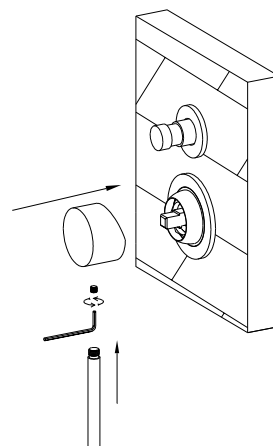

Install trim and handles

Fit both cover rings. Install the temperature control handle and diverter knob.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and check the operation of the temperature control and diverter. Inspect all accessible connections for leaks.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4