



SMOOTH AND CONTROLLED WATER FLOW

HAVEN MINIMAL WALL BASIN MIXER TAP

AT A GLANCE



BEST FOR

Everyday bathrooms
for those who value
space, flow and
detail




FEEL

Precise temperature
and flow control



INSTALLATION

Wall-mounted,
plumber required

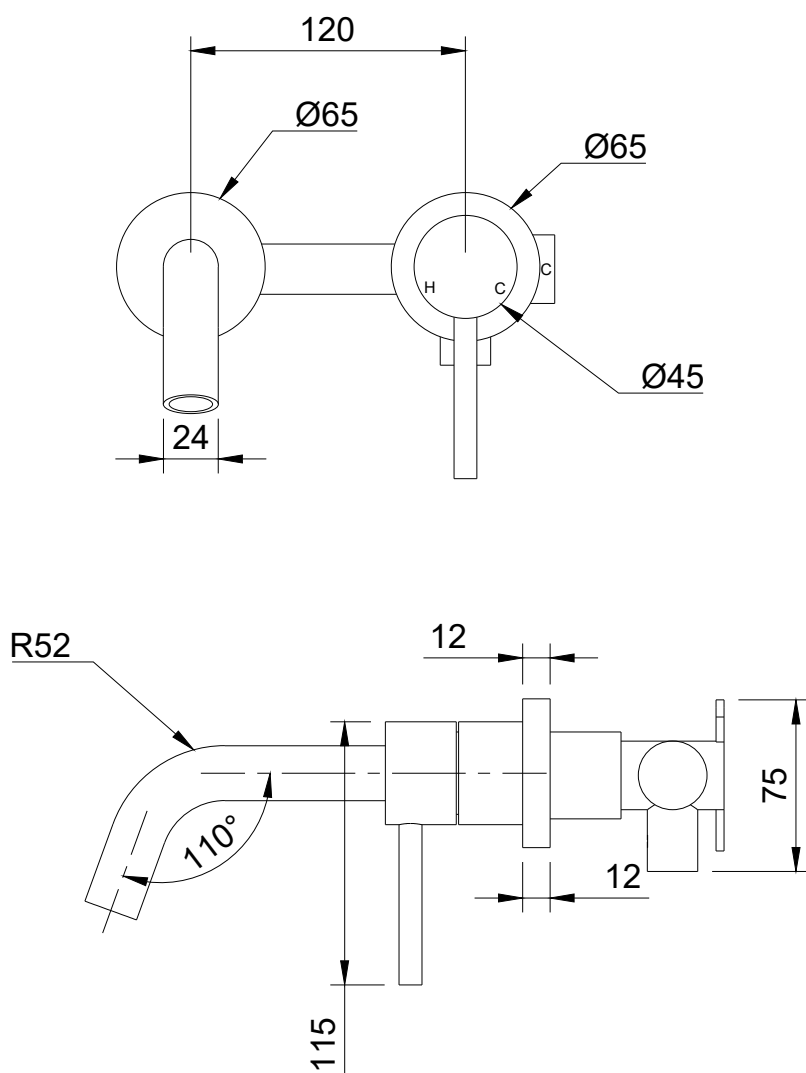

Specifications



MATERIAL

Solid **Lead-Free** Brass Construction



CARTRIDGE

Citec ceramic cartridge



FLOW RATE

5 L/min · WELS 6 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Wall-mounted · cut-out **Ø45 mm**



DIMENSIONS

Diameter **65 mm** · spout **Ø25 mm**

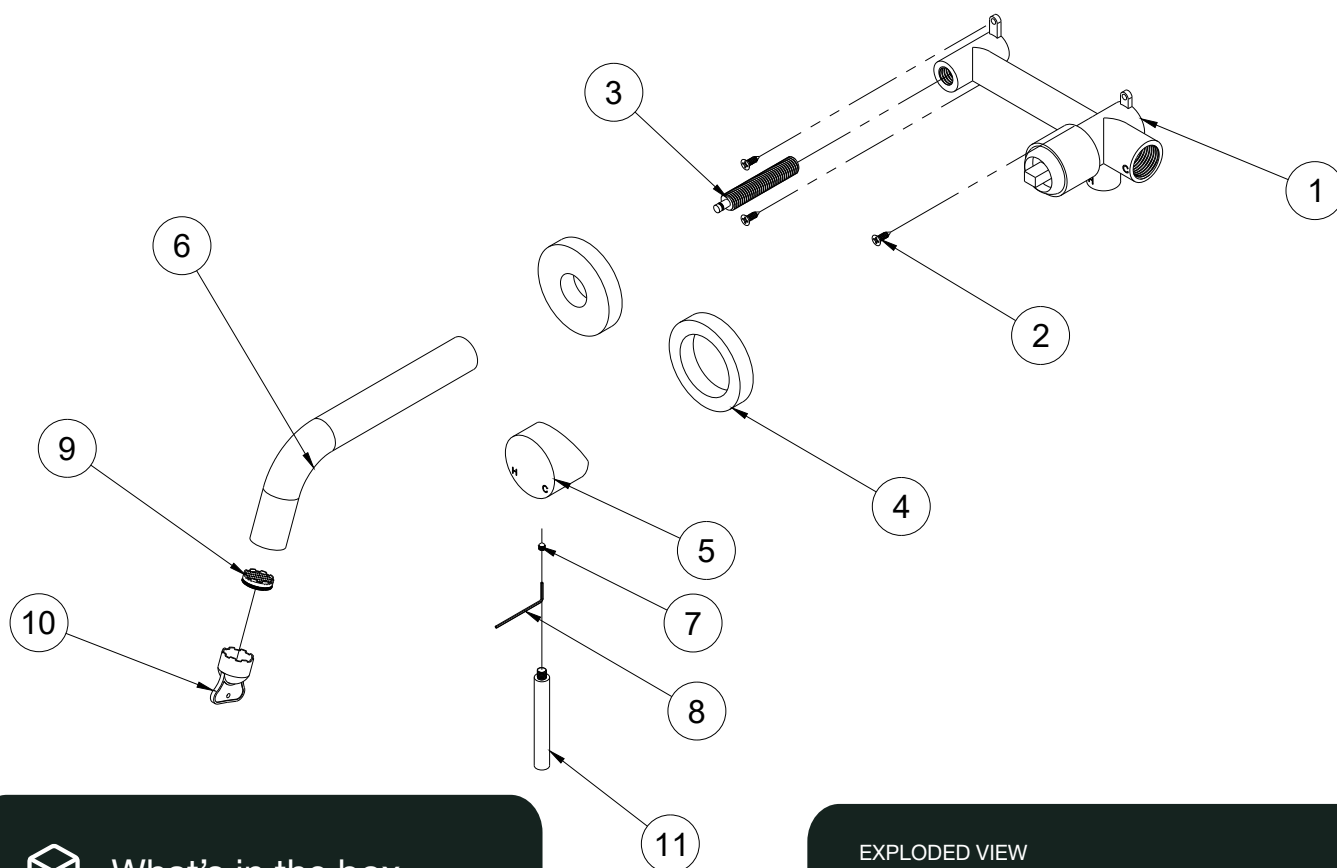

What's in the box

INCLUDED

1x	In-wall Body
1x	Tap Handle
1x	Spout
2x	Cover Rings
1x	Spout Connector Screw
3x	Fixing Screws
3x	Hollow Wall Anchors
1x	Spare Grub Screw
1x	Aerator Remover Tool
1x	Mini Hex Wrench

EXPLODED VIEW

- ① In-wall Body
- ② Fixing Screws
- ③ Spout Connector Screw
- ④ Cover Rings
- ⑤ Temperature Control Handle
- ⑥ Spout
- ⑦ Grub Screw
- ⑧ Allen Wrench
- ⑨ Aerator
- ⑩ Aerator Remover Tool
- ⑪ Pin Lever

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Insert Body

Install and secure the mixer body in the required position. Connect the hot and cold water pipework to the corresponding G1/2 inlets.


02



Connect Water Supply

Once the mixer has been fully tested and no leaks are found, complete the wall finish. Maintain an installation depth of 45–70 mm and cut openings of Ø45 mm for the tap handle and Ø25 mm for the spout.


03



Complete wall finish

Fit the cover ring and spout connector to the in-wall body. Install the spout and secure it from underneath using the grub screw and Allen key provided.

04



Install trim and handle

Fit the cover ring over the mixer body. Install the temperature control handle and secure it from underneath using the grub screw and Allen key. Then install and tighten the pin lever.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

6 STAR · 5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4