

COMPACT AND QUIETLY REFINED

HAVEN SHORT BASIN MIXER TAP

AT A GLANCE



BEST FOR

Smaller or tighter
spaces



HEIGHT

Designed for
low-profile elegance
and practical
clearance




FEEL

Precise temperature
and flow control. Small
in scale, strong in
character



INSTALLATION

Bench-mounted,
plumber required

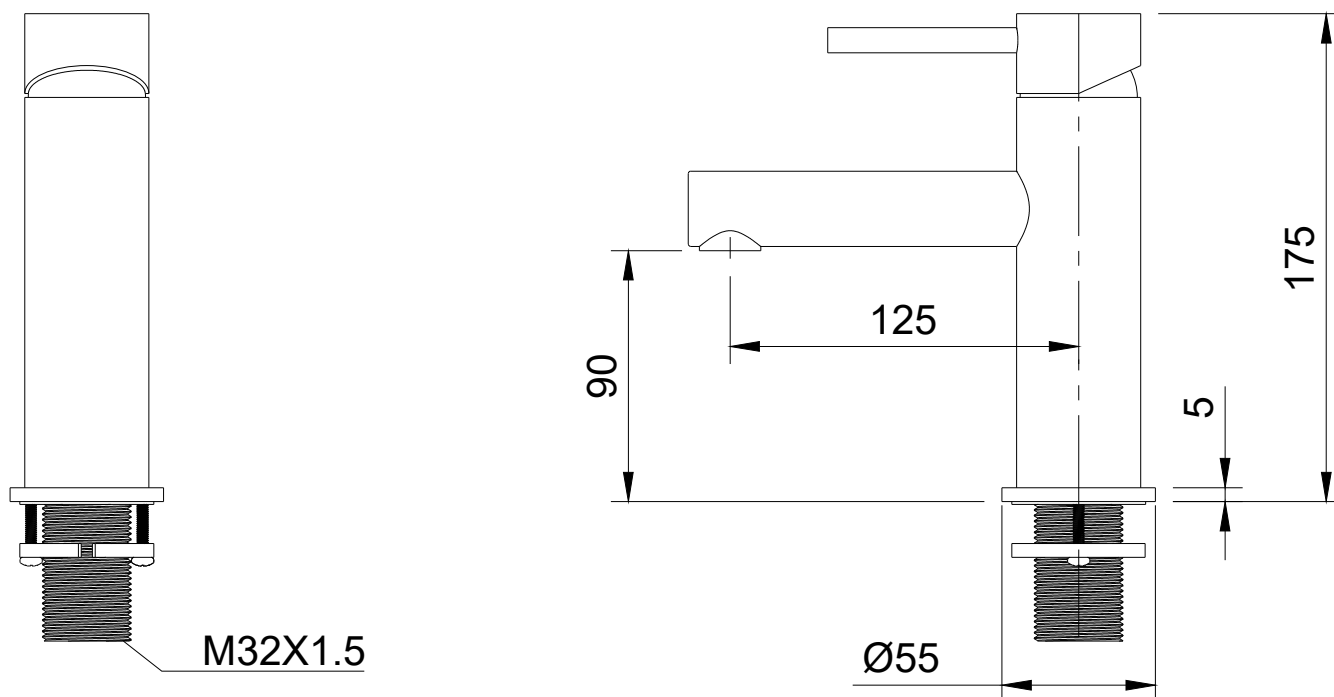

Specifications



MATERIAL

Solid **Lead-free** Brass



CARTRIDGE

Citec ceramic cartridge



FLOW RATE

4.5 L/min · WELS 6 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Bench-mounted · cut-out **Ø35 mm, Ø38 mm**



DIMENSIONS

Overall height **435 mm** · spout **Ø24 mm**

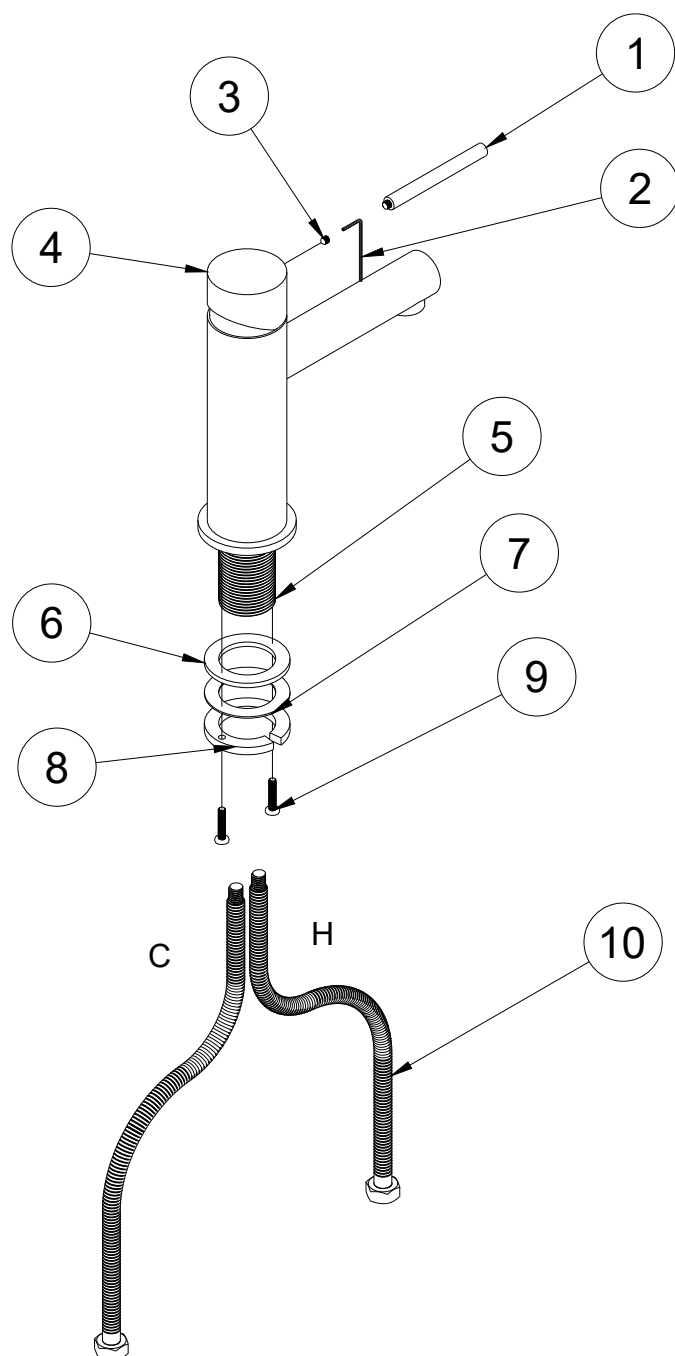

What's in the box

INCLUDED

1x	Short Basin Mixer Tap
1x	Hot Flexible Hose
1x	Cold Flexible Hose
1x	Rubber
1x	Washer
1x	Mount Nut
2x	Fixing Screws
1x	Spare Grub Screw

EXPLODED VIEW

- ① Pin Lever
- ② Mini Hex Wrench
- ③ Grub Screw
- ④ Temperature Control Handle
- ⑤ Thread Tube
- ⑥ Rubber
- ⑦ Washer
- ⑧ Mount Nut
- ⑨ Fixing Screws
- ⑩ Flexible Hose

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

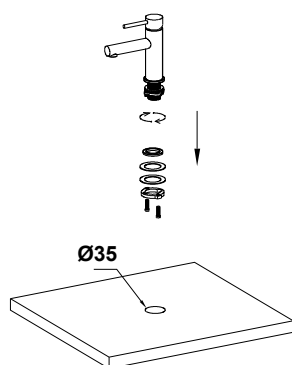

Insert Mixer

Drill a Ø35–Ø38 mm tap hole in the benchtop or basin.


02

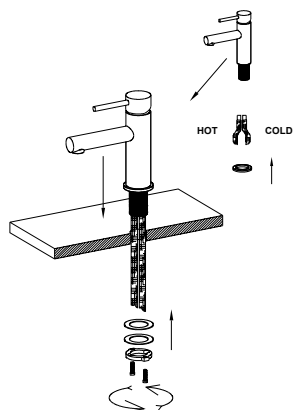

Position the Mixer

Connect the hot and cold flexible hoses to the mixer. Position the mixer over the installation hole and feed the hoses through the opening.


03

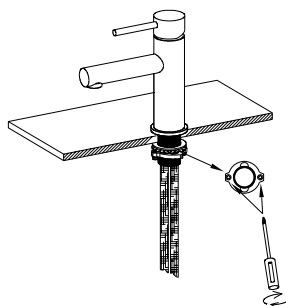

Secure the Mixer

From below, fit the rubber washer, washer and mount nut. Align the mixer correctly, then tighten the fixing screws to secure it firmly in place.

04

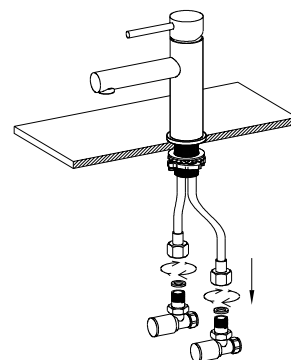

Connect the Water

Connect the hot hose to the left-hand isolation valve and the cold hose to the right-hand isolation valve, when viewing the mixer from the front.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

6 STAR · 4.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4