

SMOOTH AND CONTROLLED WATER FLOW

HAVEN SHORT WALL MIXER AND TAP

AT A GLANCE



BEST FOR

Everyday bathrooms for those who value space, flow and detail




FEEL

Precise temperature and flow control



INSTALLATION

Wall-mounted, plumber required

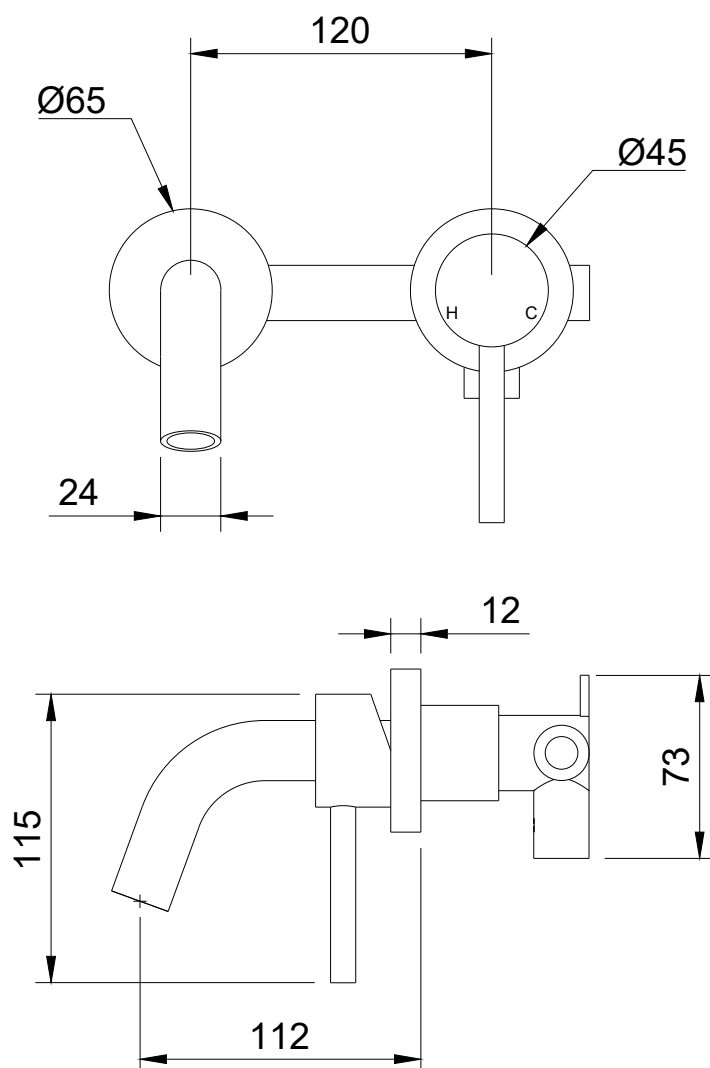

Specifications



MATERIAL

Solid **Lead-free** Brass



CARTRIDGE

Citec ceramic cartridge



FLOW RATE

6 L/min · WELS 5 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**



MOUNTING

Wall-mounted · Tile cut-out **Ø45 mm** (handle) **Ø22 mm** (spout)



DIMENSIONS

Coverplate thickness **112 mm** · Spout Diameter **Ø24 mm**

Spout Length **100 mm**




What's in the box

INCLUDED

1x	In-wall Body
1x	Tap Handle
1x	Spout
1x	Cover Plate
1x	Spout Connector Screw
3x	Fixing Screws
3x	Hollow Wall Anchors
2x	Spare Grub Screws
1x	Aerator Remover Tool
1x	Mini Hex Wrench

EXPLODED VIEW

- ① In-wall Body
- ② Fixing Screws
- ③ Cover Rings
- ④ Mini Hex Wrench
- ⑤ Grub Screw
- ⑥ Pin Lever
- ⑦ Spout
- ⑧ Aerator
- ⑨ Aerator Remover Tool

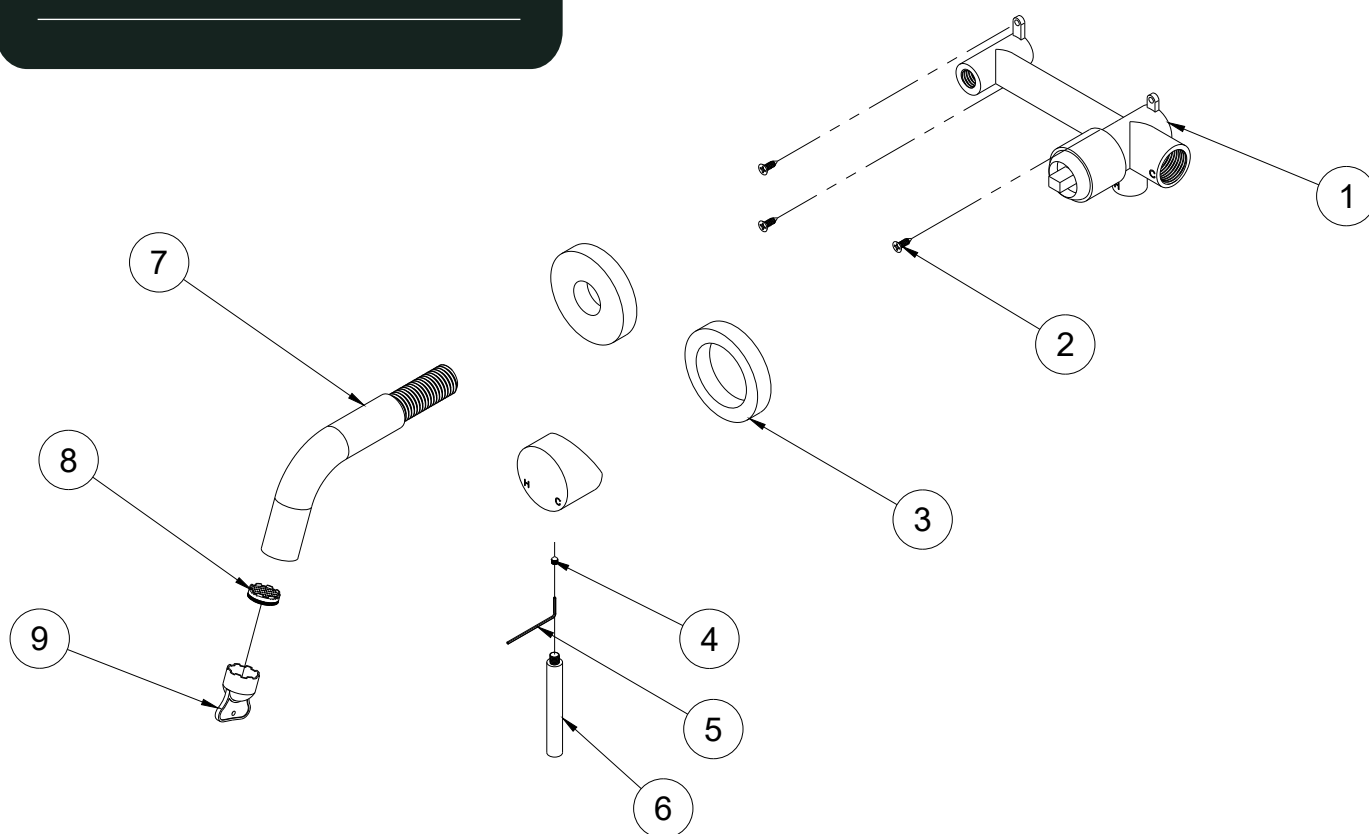

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Intall Body

Position and secure the in-wall body. Connect the hot water supply to the left inlet and the cold water supply to the right inlet.


02



Set Depth

Set the installation depth between 45–70 mm. Prepare a Ø45 mm opening for the tap handle and a Ø22 mm opening for the spout.


03



Install Spout

Fit the cover rings. Attach the spout and connector, then secure with the grub screw using the mini hex wrench.

04

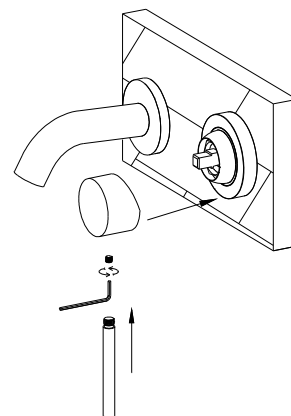

Install Handle

Fit the mixer handle and secure it from underneath using the grub screw and mini hex wrench.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the mixer has been fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

5 STAR · 6 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4