



ELEVATE AND BALANCE

## HAVEN TALL BASIN MIXER TAP

AT A GLANCE



BEST FOR

Everyday  
bathrooms



HEIGHT

Designed to balance  
out spaces




FEEL

Precise temperature  
and flow control. Small  
in scale, strong in  
character



INSTALLATION

Bench-mounted,  
plumber required

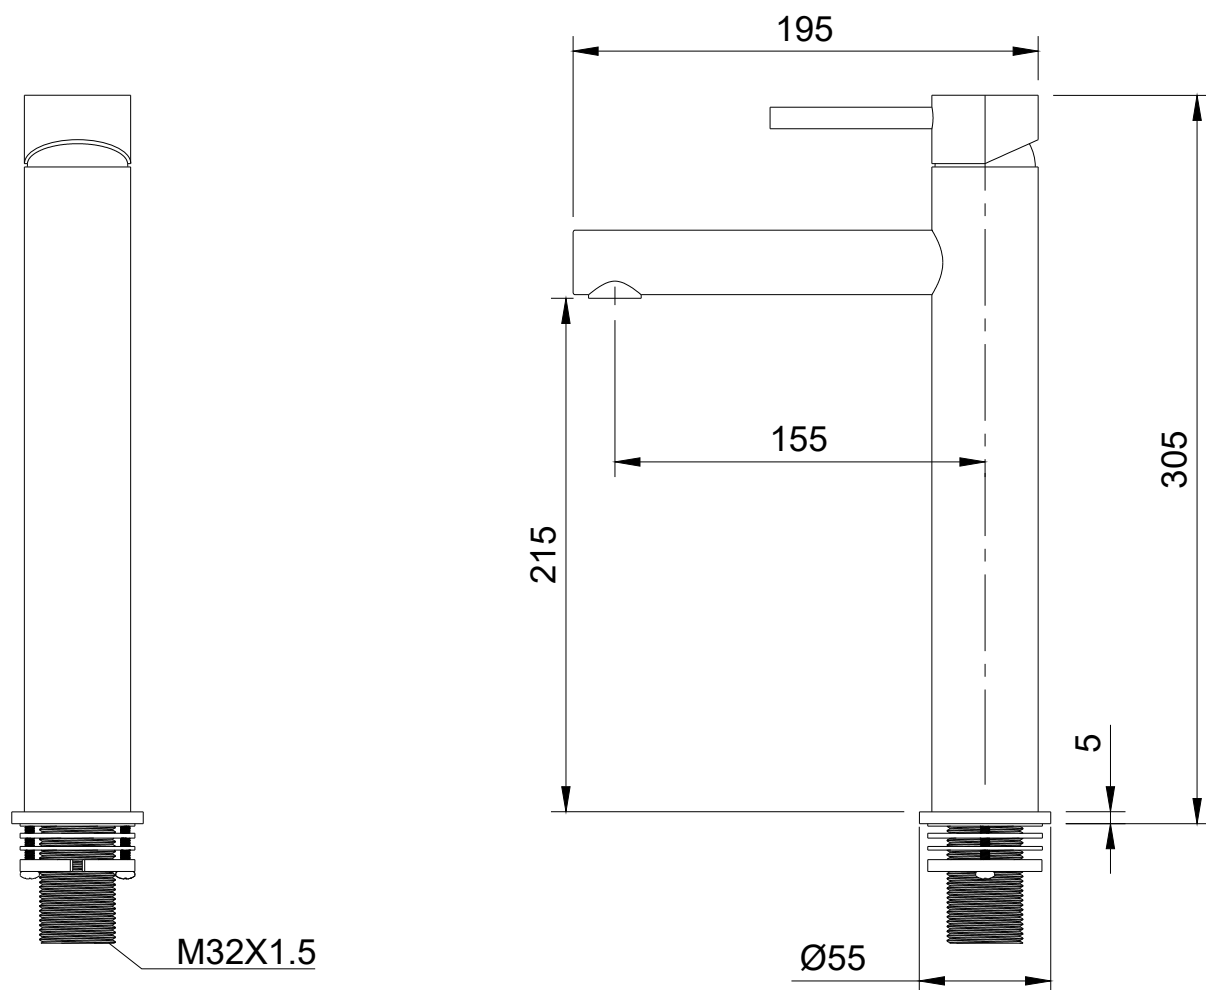

## Specifications



### MATERIAL

Solid **Lead-free** Brass



### CARTRIDGE

Citec ceramic cartridge



### FLOW RATE

**4.5 L/min** · WELS 6 Star



### PRESSURE RANGE

**50-800 kPa**



### TEMPERATURE

**4-80 °C**



### CONNECTIONS

Standard **G1/2"**




### MOUNTING

Bench-mounted · Tile cut-out **Ø35 - 38 mm**



### DIMENSIONS

Overall height **305 mm** · Mixer base **Ø55 mm**

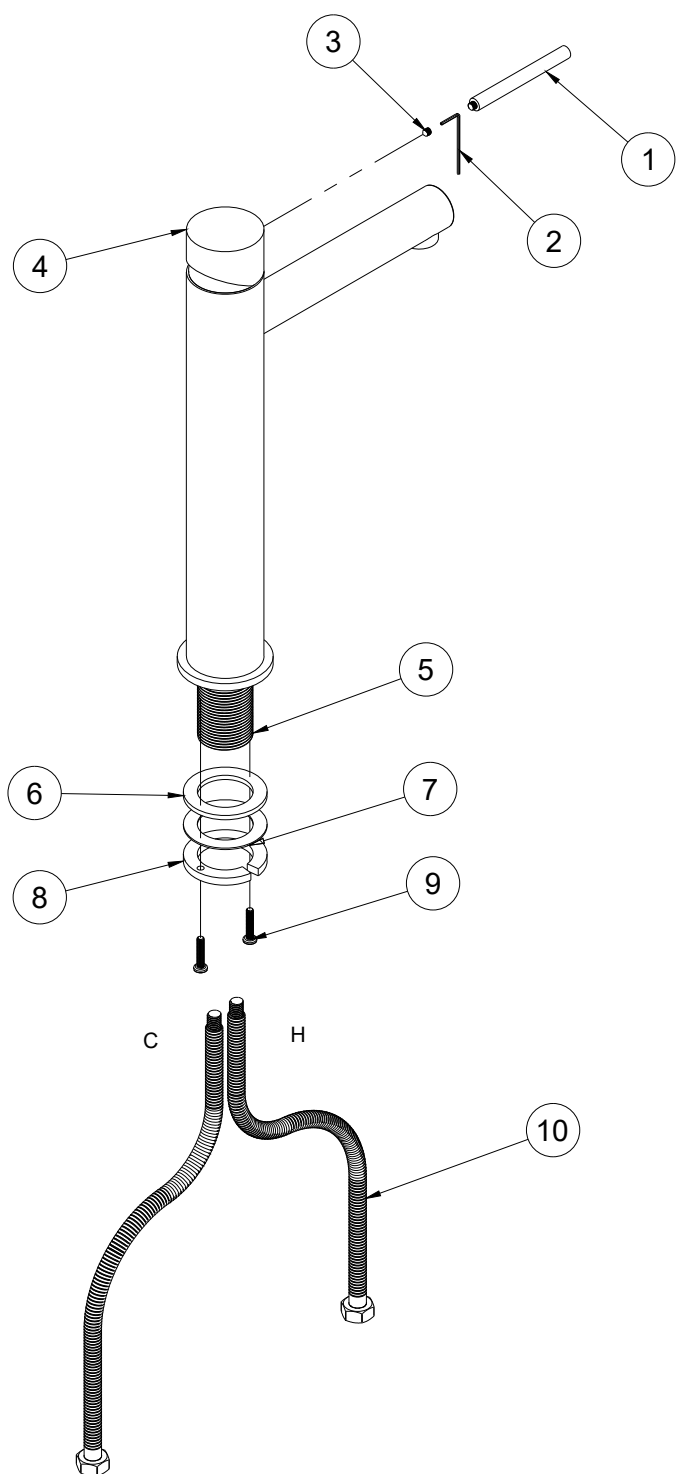

## What's in the box

### INCLUDED

|           |                      |
|-----------|----------------------|
| <b>1x</b> | Tall Basin Mixer Tap |
| <b>1x</b> | Hot Flexir Hose      |
| <b>1x</b> | Cold Flexir Hose     |
| <b>1x</b> | Rubber               |
| <b>1x</b> | Washer               |
| <b>1x</b> | Mount Nut            |
| <b>2x</b> | Fixing Screws        |
| <b>1x</b> | Spare Grub Screw     |

### EXPLODED VIEW

- ① Pin Lever
- ② Mini Hex Wrench
- ③ Grub Screw
- ④ Temperature Control Handle
- ⑤ Thread Tube
- ⑥ Rubber
- ⑦ Washer
- ⑧ Mount Nut
- ⑨ Fixing Screws
- ⑩ Flexi Hose

## Finish Options



**Antique Brass**  
AEA



**Brushed Nickel**  
AEA



**Brushed Brass**  
PVD



**Brushed Copper**  
PVD




**Gun Metal**  
PVD

## Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

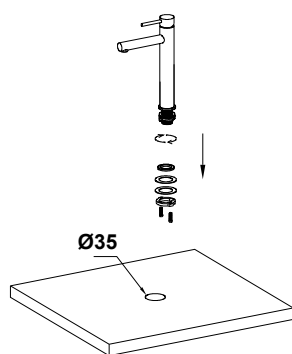

### Cut-Out

Drill a Ø35–Ø38 mm tap hole in the benchtop or basin.


02

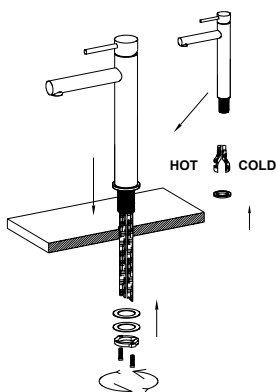

### Position Mixer

Position the mixer over the installation hole. Feed the hot and cold hoses through the hole.


03

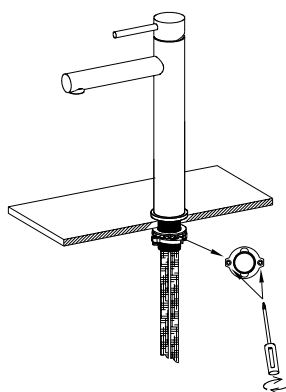

### Secure Mixer

Tighten the fixing screws evenly until the mixer is firmly secured in place.

04

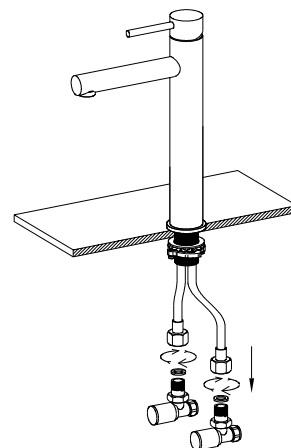

### Connect Water

Connect the hot water hose to the left-hand isolation valve and the cold water hose to the right-hand isolation valve.



### FINAL CHECK · TURN ON & TEST

Turn on the water supply and run the mixer. Check all connections for leaks and confirm correct operation. Do not seal or tile until the tap is fully tested.

## Care & Maintenance



### MILD SOAP & WARM WATER

Clean with mild soap and warm water.



### SOFT CLOTH ONLY

Use soft cloth only.



### NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

## Compliance



### WATERMARK CERTIFIED

AS/NZS 3718



### WELS APPROVED

6 STAR · 4.5 L/MIN



### NCC LEAD-FREE

LESS THAN 0.25%



### INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4