



ELEVATE AND BALANCE

HAVEN TALL BASIN MIXER TAP

AT A GLANCE



BEST FOR

Everyday
bathrooms



HEIGHT

Designed to balance
out spaces




FEEL

Precise temperature
and flow control. Small
in scale, strong in
character



INSTALLATION

Bench-mounted,
plumber required

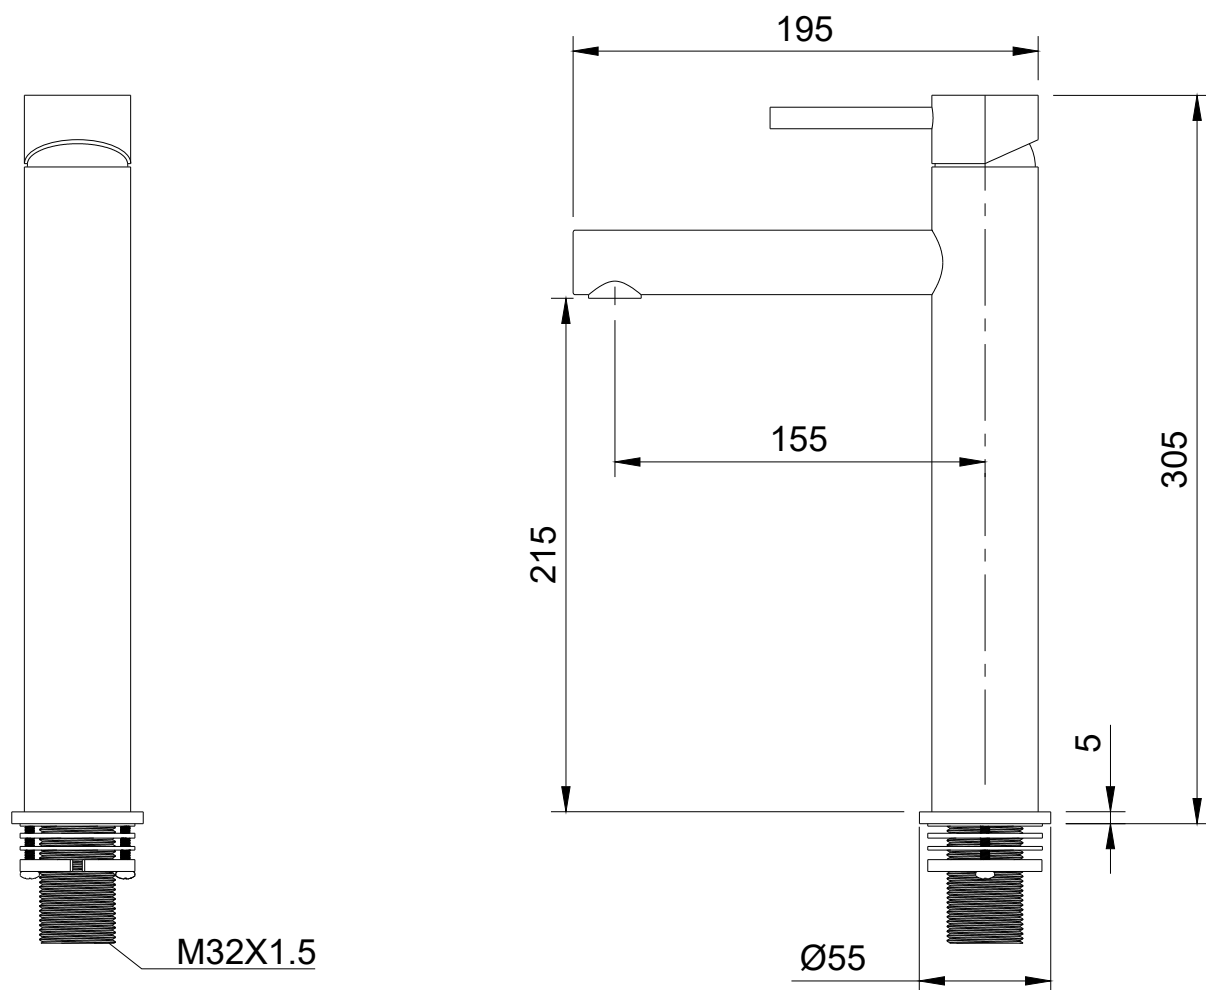

Specifications



MATERIAL

Solid **Lead-free** Brass



CARTRIDGE

Citec ceramic cartridge



FLOW RATE

4.5 L/min · WELS 6 Star



PRESSURE RANGE

50-800 kPa



TEMPERATURE

4-80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Bench-mounted · Tile cut-out **Ø35 - 38 mm**



DIMENSIONS

Overall height **305 mm** · Mixer base **Ø55 mm**

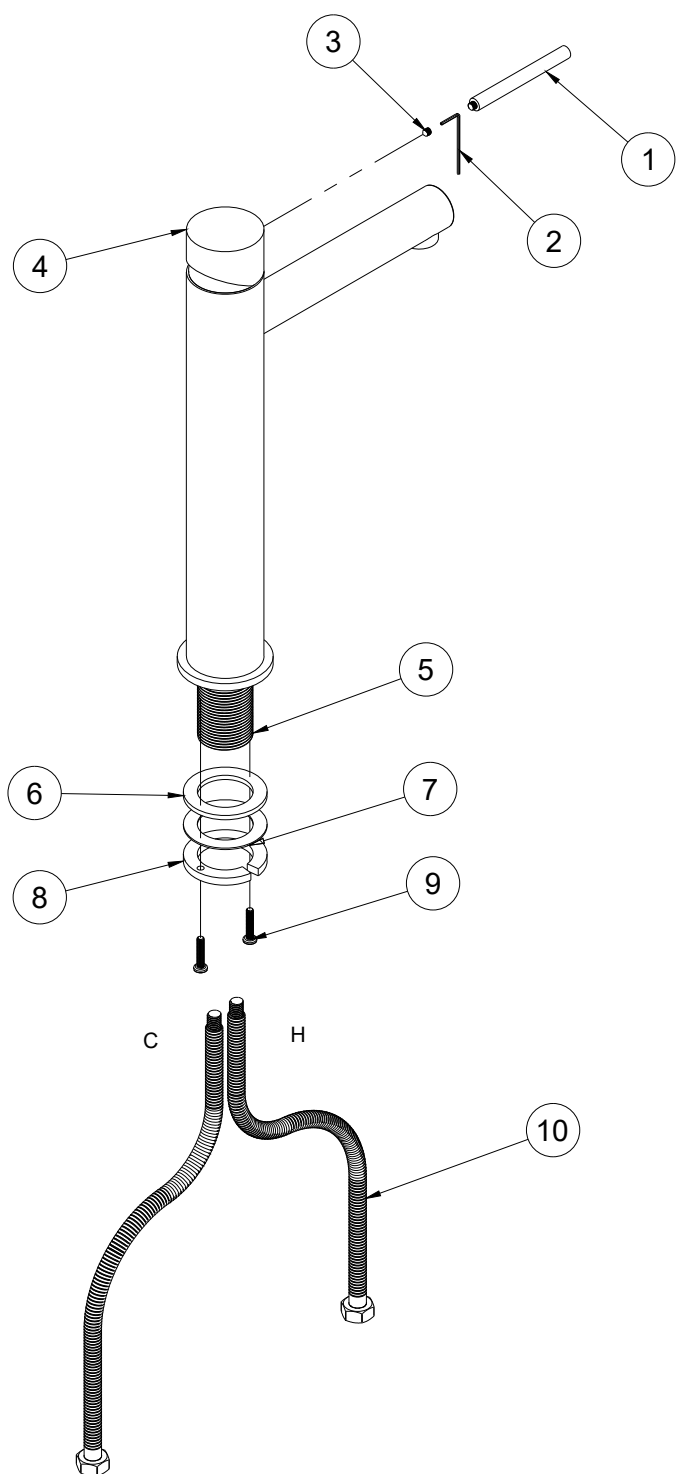

What's in the box

INCLUDED

1x	Tall Basin Mixer Tap
1x	Hot Flexir Hose
1x	Cold Flexir Hose
1x	Rubber
1x	Washer
1x	Mount Nut
2x	Fixing Screws
1x	Spare Grub Screw

EXPLODED VIEW

- ① Pin Lever
- ② Mini Hex Wrench
- ③ Grub Screw
- ④ Temperature Control Handle
- ⑤ Thread Tube
- ⑥ Rubber
- ⑦ Washer
- ⑧ Mount Nut
- ⑨ Fixing Screws
- ⑩ Flexi Hose

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

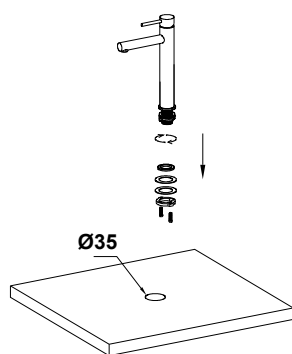

Cut-Out

Drill a Ø35–Ø38 mm tap hole in the benchtop or basin.


02

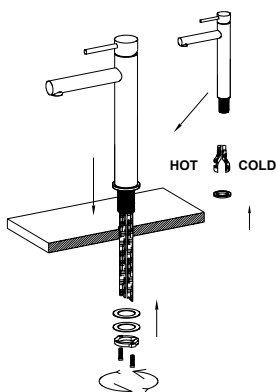

Position Mixer

Position the mixer over the installation hole. Feed the hot and cold hoses through the hole.


03

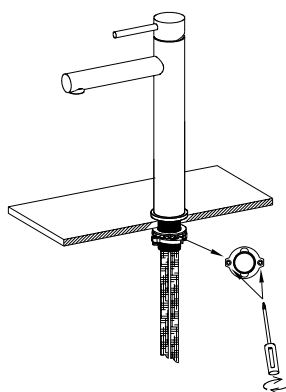

Secure Mixer

Tighten the fixing screws evenly until the mixer is firmly secured in place.

04

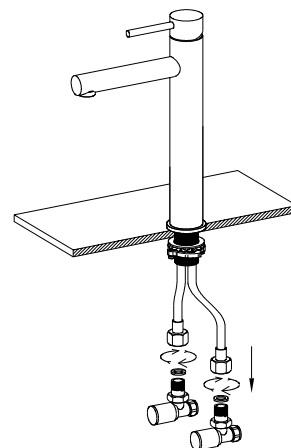

Connect Water

Connect the hot water hose to the left-hand isolation valve and the cold water hose to the right-hand isolation valve.



FINAL CHECK · TURN ON & TEST

Turn on the water supply and run the mixer. Check all connections for leaks and confirm correct operation. Do not seal or tile until the tap is fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

6 STAR · 4.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4