

SMOOTH AND CONTROLLED WATER FLOW

HAVEN WALL MIXER AND TAP

AT A GLANCE



BEST FOR

Everyday bathrooms
for those who value
space, flow and detail




FEEL

Precise temperature
and flow control



INSTALLATION

Wall-mounted,
plumber required

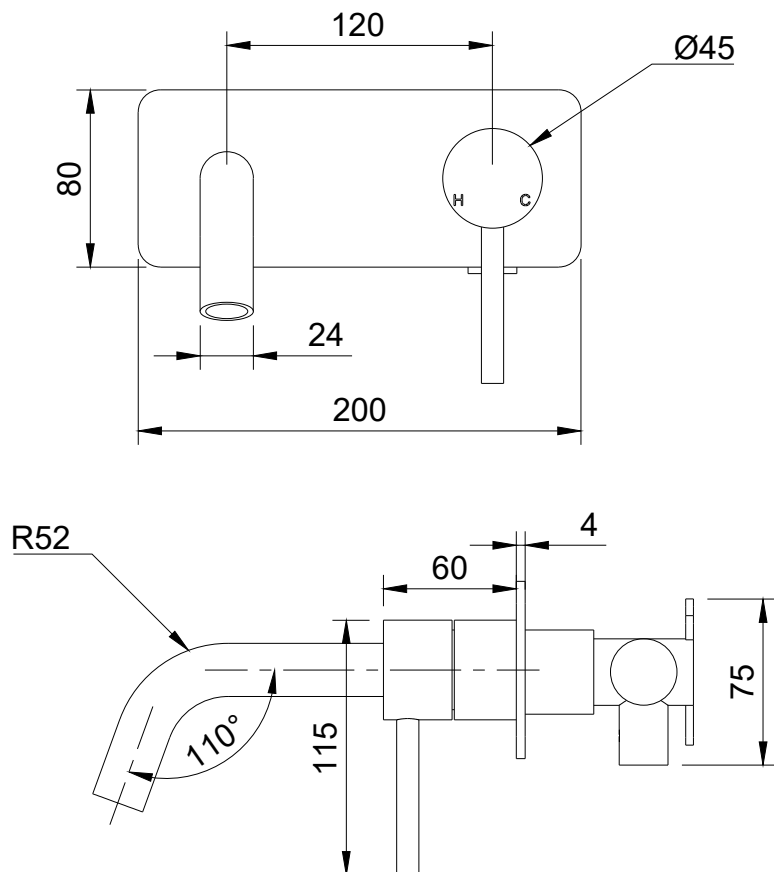

Specifications



MATERIAL

Lead-free **DZR** Brass



CARTRIDGE

Citec ceramic cartridge



FLOW RATE

4.5 L/min · WELS 6 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**



MOUNTING

Wall-mounted · cut-out **Ø45 mm**



DIMENSIONS

Cover width **200 mm** · spout **24 mm** · thickness **4 mm**




What's in the box

INCLUDED

1x	In-wall Body
1x	Tap Handle
1x	Spout
1x	Cover Plate
1x	Spout Connector Screw
3x	Fixing Screws
3x	Hollow Wall Anchors
1x	Spare Grub Screw
1x	Aerator Remover Tool
1x	Mini Hex Wrench

EXPLODED VIEW

- ① In-wall Body
- ② Fixing Screws
- ③ Spout Connector Screw
- ④ Cover Plate
- ⑤ Temperature Control Handle
- ⑥ Spout
- ⑦ Grub Screw
- ⑧ Mini Hex Wrench
- ⑨ Aerator
- ⑩ Aerator Remover Tool
- ⑪ Pin Lever

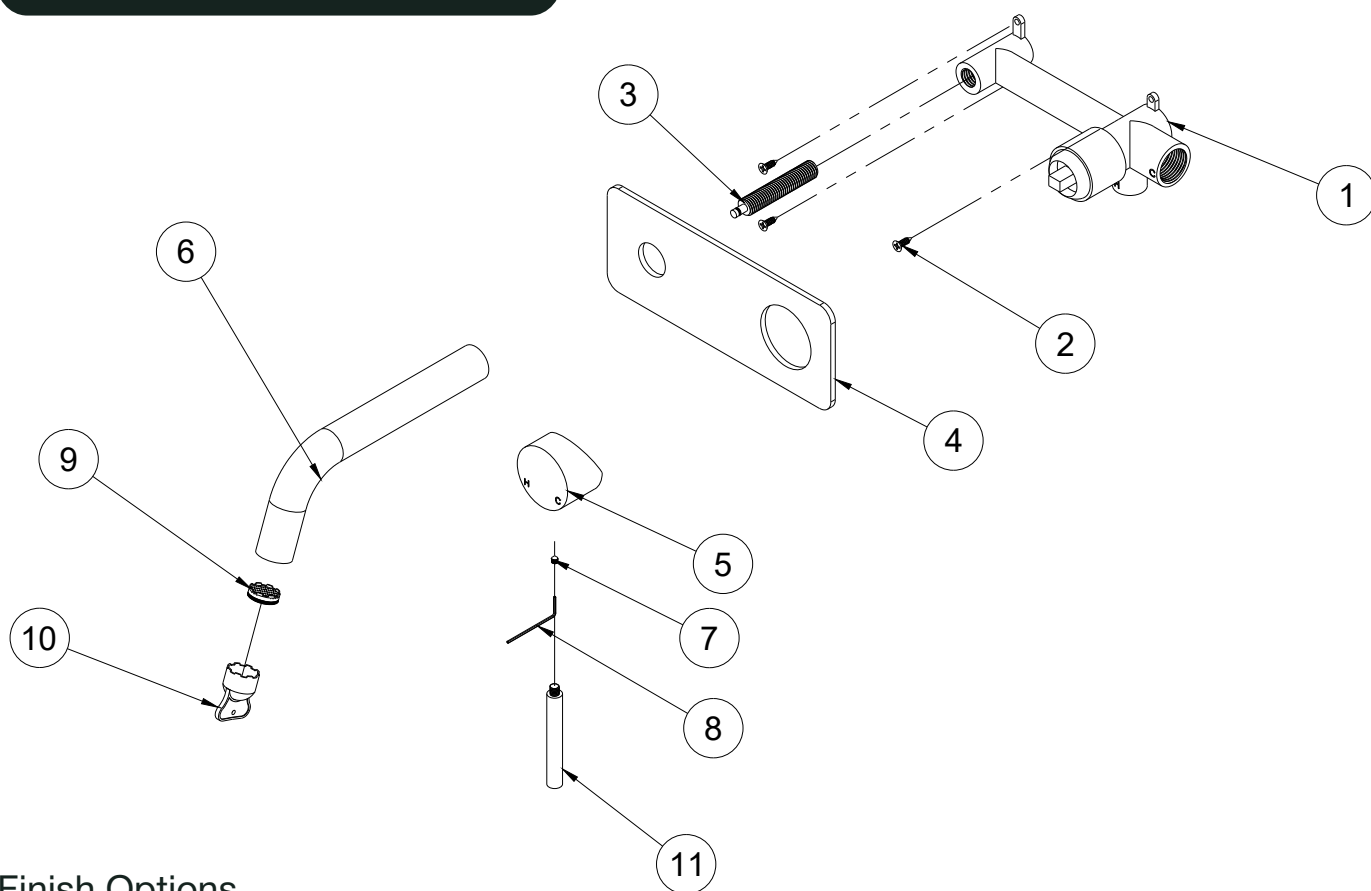

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Connect Body

Position the mixer body and connect the hot and cold water supplies.


02



Prepare Wall Openings

Refer to the installation drawing for the required opening sizes and installation depth.


03



Install Cover

Once testing is successful, complete the wall finish. Fit the cover plate, install the spout connector and attach the spout.

04



Install Handle

Fit the tap handle and secure it from underneath using the grub screw and Allen key.



FINAL CHECK - TURN ON & TEST

Turn on the water supply and check for correct operation and leaks. Do not seal or tile until the mixer has been fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

6 STAR · 4.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4