



FUNCTIONAL AND REFINED

KITCHEN SINK BASKET

AT A GLANCE



BEST FOR

Everyday kitchens




MATERIAL

Crafted from Stainless Steel



INSTALLATION

-

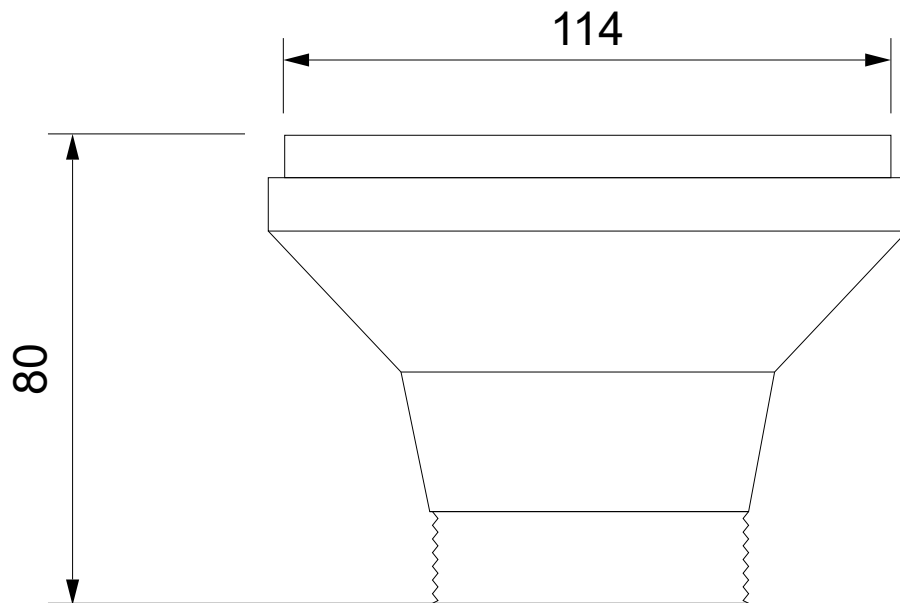

Specifications



MATERIAL

Premium **SS304** Stainless Steel



SINK CUT-OUT

Ø90 mm



APPLICATION

Everyday kitchens



CONNECTIONS

G2 (2 inch) · **Ø58 mm**




TOP FLANGE

Diameter **Ø114 mm**



DIMENSIONS

Overall height **80 mm** · Top flange diameter **114 mm**
· Outlet thread **G2 - Ø58 mm**

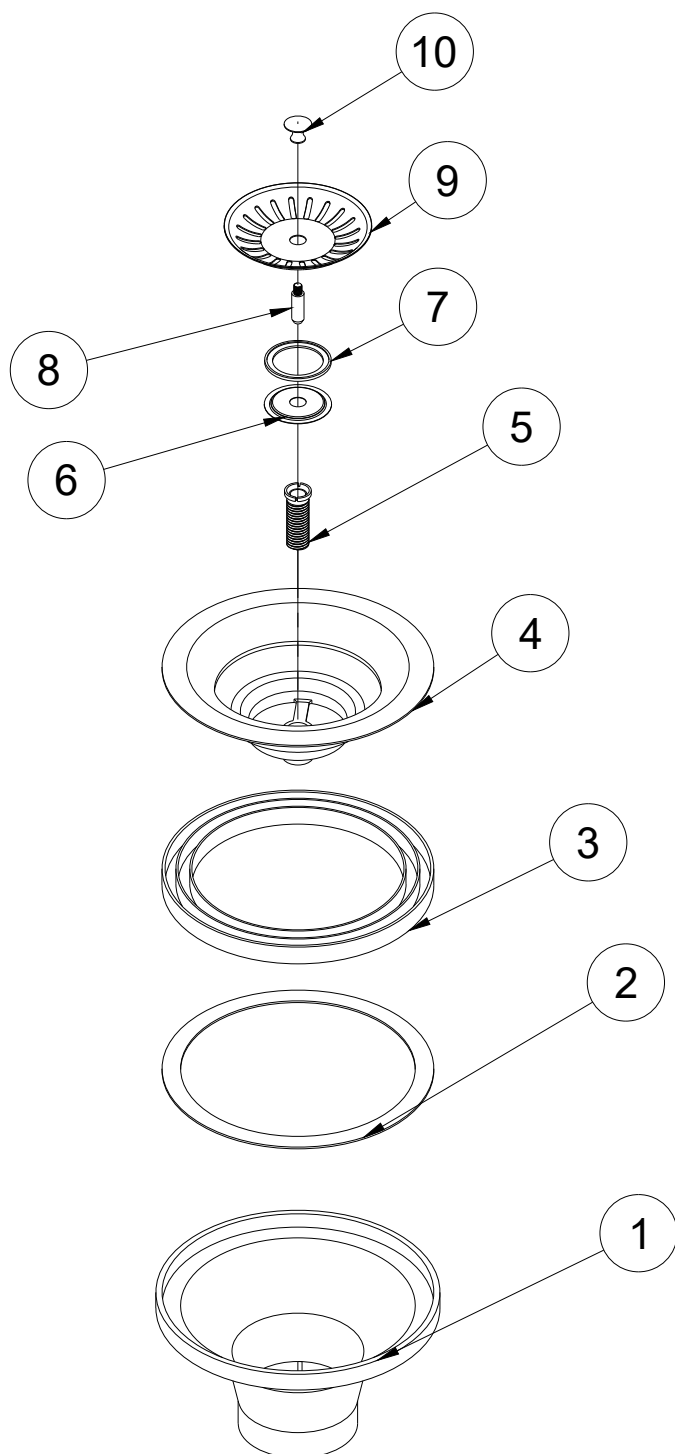

What's in the box

INCLUDED

- 1x** Kitchen sink basket waste
- 1x** Strainer basket
- 1x** Installation instructions

EXPLODED VIEW

- ① Lower waste outlet body
- ② Lower rubber sealing gasket
- ③ Foam sealing washer
- ④ Upper basket-waste body / sink flange
- ⑤ Threaded center tube
- ⑥ Lower center washer
- ⑦ Center sealing O-ring
- ⑧ Basket spindle
- ⑨ Removable strainer basket
- ⑩ Basket lifting knob

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Prepare the basket waste

Unscrew the lower waste body and remove the foam and rubber sealing washers. Keep the internal basket mechanism assembled.


02

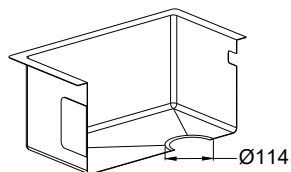

Check the sink opening

Confirm the sink has a clean, dry Ø114 mm waste opening. Remove any dirt or residue that may affect the seal.


03



Install the upper waste body

Place the foam sealing washer beneath the upper flange. Insert the upper waste body through the sink opening, ensuring it is centred and sits flat.

04

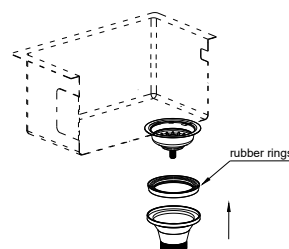

Secure and test

From below the sink, fit the rubber sealing gasket and lower waste body. Tighten evenly without overtightening. Connect the trap and waste pipe, fill the sink and check all connections for leaks.



FINAL CHECK - TURN ON & TEST

Fully test the installation before completing cabinetry or handing over the sink. Do not seal or tile until fully tested.

Care & Maintenance



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4