



SIMPLE PRIVACY, REFINED DESIGN

LOMBARDY DOOR LOCK

AT A GLANCE



BEST FOR

Internal doors requiring
a compact and discreet
floor-mounted stop




MATERIAL

Crafted from Stainless
Steel 304



INSTALLATION

Installation type:
Mortised

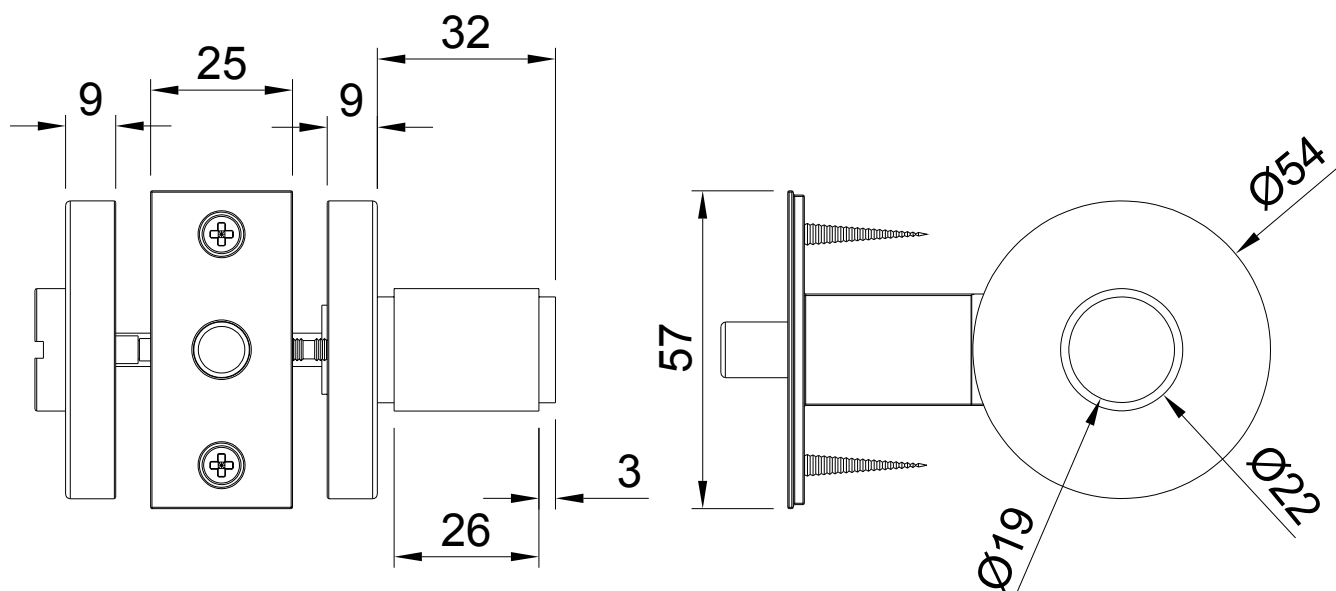

Specifications



MATERIAL

Crafted from **Stainless Steel 304**



INSTALLATION TYPE

Installation type Mortised ·
Round privacy knob



LOCK TYPE

Internal privacy lock · Not designed
as a keyed security lock



MOUNTING SYSTEM

Concealed mounting system ·
Internal privacy control · External
emergency-release function

ROSE


Rose diameter **Ø54 mm** ·
Rose depth **9 mm**

KNOB

Knob projection from rose **32 mm** ·
Knob body length **26 mm** ·
Knob face diameters **Ø22 mm**

DIMENSIONS

Lock body depth **25 mm** ·
Faceplate height **57 mm** · Backset **60 mm**

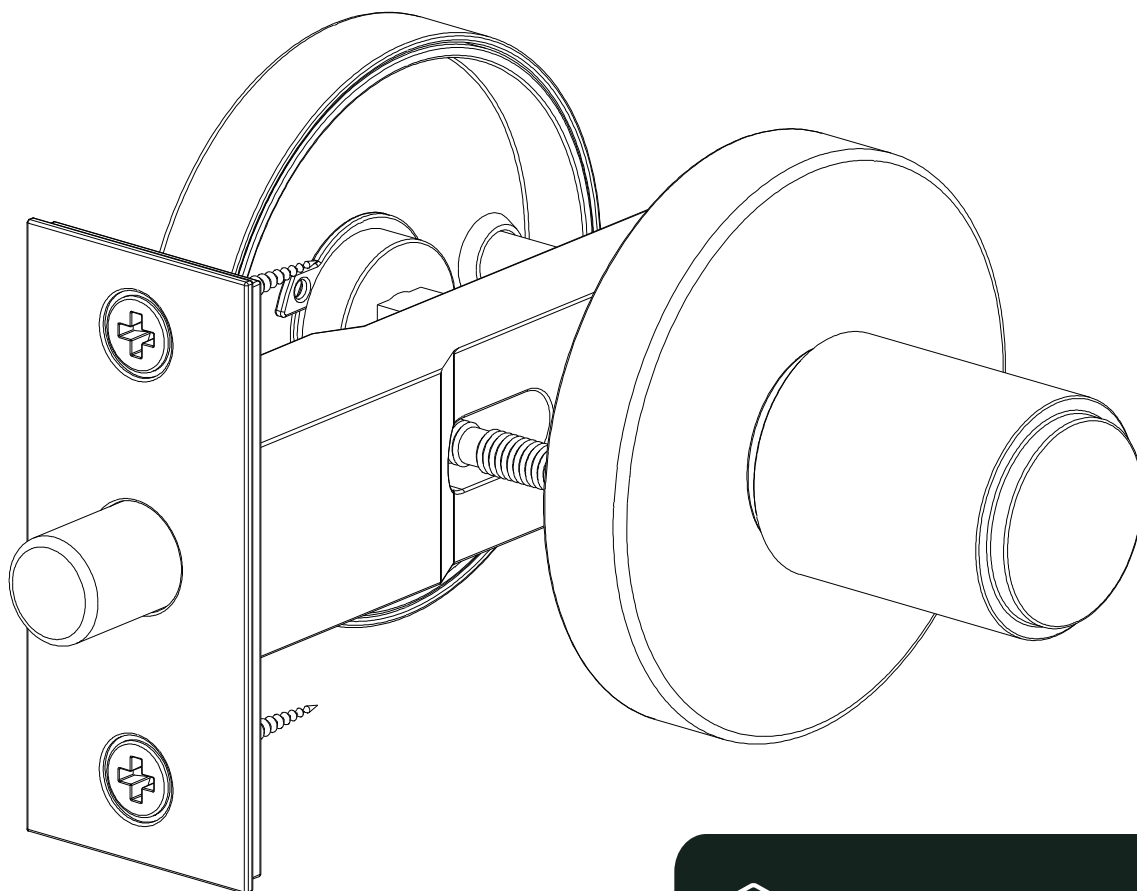

What's in the box

INCLUDED

1x	Mortice privacy lock body
1x	Square spindle
1x	Internal privacy knob assembly
1x	External emergency-release assembly
2x	Decorative rose covers
1x	Through-fixing set
2x	Faceplate fixing screws

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD




Brushed Copper
PVD



Gun Metal
PVD

Installation Guide


01

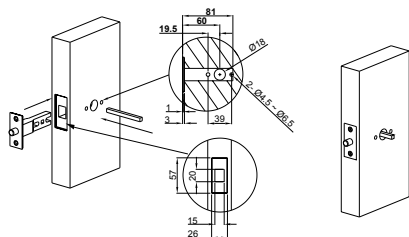

Prepare the Door

Mark the lock centreline on the door face and transfer it squarely onto the door edge. Using the 60 mm backset, mark the spindle and fixing-hole positions. Drill the required holes through the door, working carefully from both sides where possible to prevent surface breakout. Mortise the door edge to suit the lock body and recess the faceplate until it sits flush.


02

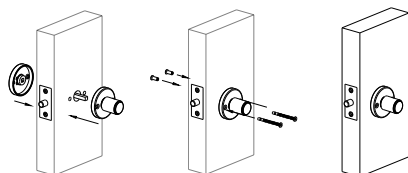

Install the Lock Body

Insert the lock body into the door-edge mortise, ensuring the latch is correctly oriented for the closing direction. Secure the faceplate using the supplied fixing screws. Insert the square spindle through the lock-body spindle follower.

03

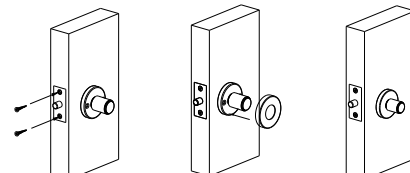

Fit the Lock Assemblies

Position the internal privacy assembly and external emergency-release assembly on opposite sides of the door. Ensure both assemblies engage correctly with the square spindle. Fit the through-fixing screws and nuts, then tighten evenly. Do not overtighten, as this may restrict the lock operation.



FIT THE COVERS AND TEST

Fit the decorative rose covers over the mounting plates and secure them in position. Operate the lock several times with the door open. Check the latch, privacy function and external emergency release. Close the door carefully and confirm the latch engages correctly with the strike plate.

Care & Maintenance



CLEAN REGULAR

Clean regularly using warm water, mild detergent and a soft cloth.



SOFT CLOTH ONLY

Dry thoroughly after cleaning.



DO NOT USE

Do not use acidic cleaners, abrasive products, scouring pads or coarse brushes, as these may damage the finish.

Important

This product is a privacy lock and is not intended to provide keyed security.

Confirm all measurements against the physical product before cutting the door.

Do not overtighten the mounting screws.

The lock must operate smoothly before the door is closed.

Installation should be completed by a suitably experienced installer.

A matching strike plate must be correctly aligned.