rainco



TIMELESS TONE, SEAMLESS DESIGN.

LOMBARDY FLUSH DOOR LOCK

AT A GLANCE

BEST FOR

Sliding and cavity doors, combining privacy and security with timeless appeal

FEEL


Crafted from Stainless Steel 304

INSTALLATION

Recessed

rainco

Front View · Side View

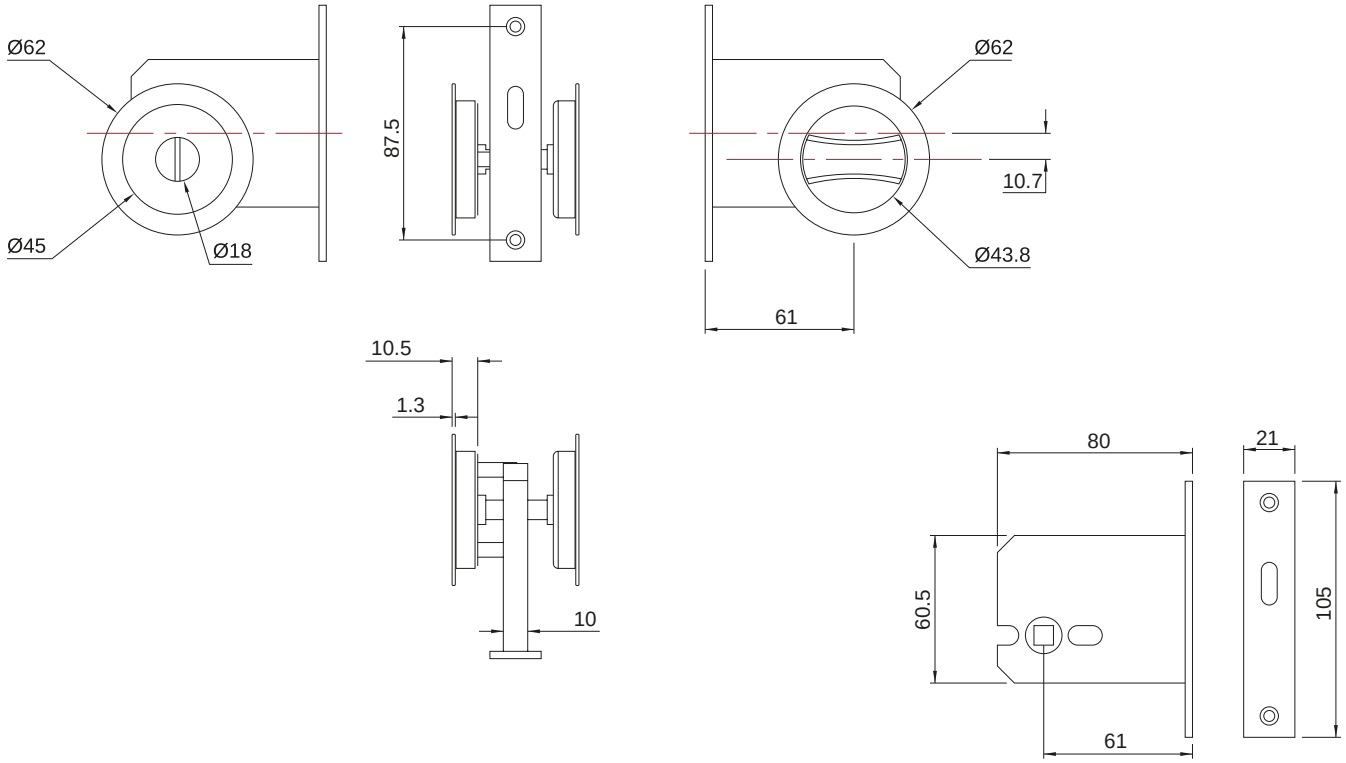

Specifications

MATERIAL
Stainless Steel 304

MOUNTING
Flush-mounted

DIMENSIONS

Faceplate diameter **Ø62 mm** ·
Recession depth (lock body) **80 mm** ·
Lock faceplate height **105 mm**

What's in the box

INCLUDED

2x	Door Knobs
1x	Latch Receiver
1x	Lock Shaft
2x	Wall Plates
2x	Lock Cylinders
6x	Screws
2x	Spare Screws


Finish Options

Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide


01

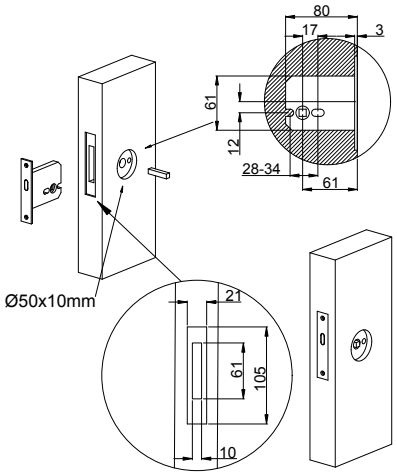

Drill the roles

Drill the holes on the door panel according to lockset size. Insert the Lock cylinder then put the square shaft into the lock cylinder hole.


02

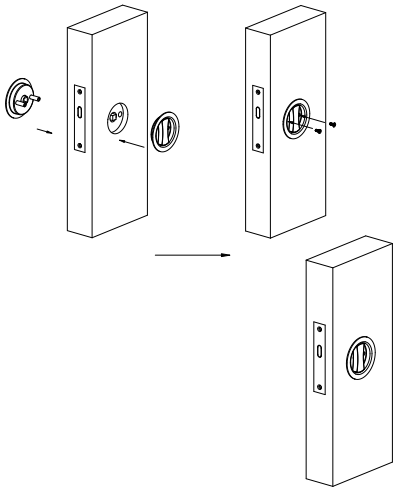

Put knob

Put knob handle in. Tighten the screw and nut.

03

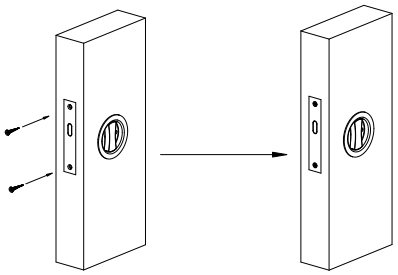

Tighten the screws

Tighten the screws of the lockset.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4