



EASY DOOR REMOVAL, RIGHT-HAND CONFIGURATION

LOMBARDY RIGHT HAND LIFT OFF HINGES

AT A GLANCE



BEST FOR

Right-hand internal doors requiring convenient removal for access, maintenance or replacement




MATERIAL

Crafted from Stainless Steel 304



INSTALLATION

Recessed or surface-mounted

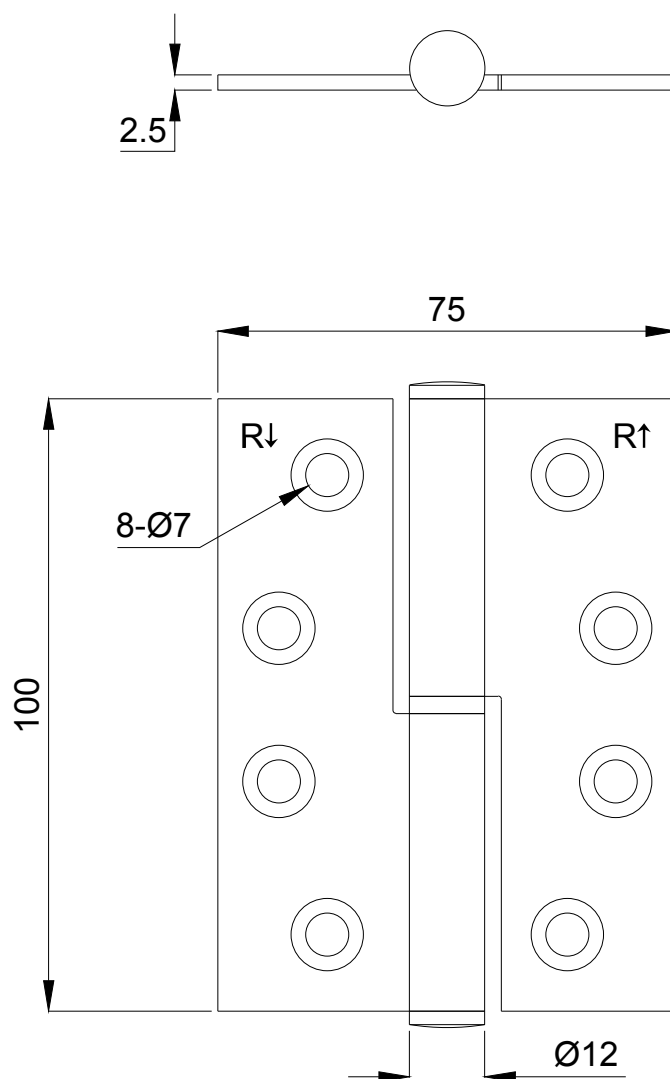

Specifications

MATERIAL

Crafted from **Stainless Steel 304**

INSTALLATION TYPE

Recessed or surface-mounted
· Single-hole installation

CONFIGURATION


Lift-off hinge · Quantity: Pair · Handing:
Right hand · Eight countersunk fixing
holes per hinge

DIMENSIONS

Overall height **100 mm** · Overall open width
75 mm · Leaf thickness **2.5 mm** · Knuckle
diameter **Ø12 mm** · Fixing holes **8 × Ø7 mm**
per hinge

DOORS

Suitable for internal hinged doors

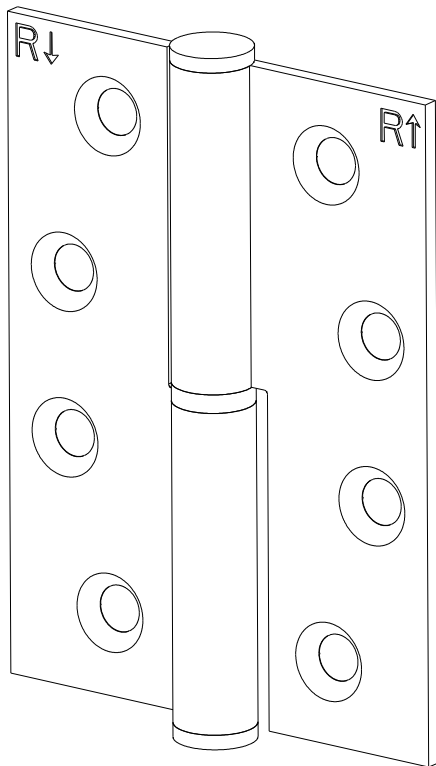

What's in the box

INCLUDED

2x Right-hand lift-off hinges

16x Fixing screws

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD




Brushed Copper
PVD



Gun Metal
PVD

Installation Guide


01



Position the Hinges

Support the door in its correct position within the frame. Position both hinges with the R markings and directional arrows oriented as shown in the right-hand installation diagram. Mark the hinge outlines and fixing-hole positions.


02



Prepare the Door and Frame

If recessing the hinges, cut the mortises to match the 2.5 mm hinge-leaf thickness. The leaves must sit flat and flush. Drill pilot holes at the marked fixing points.


03



Secure the Hinges

Separate the lift-off hinge leaves. Fix the corresponding leaves to the door and frame using suitable screws. Ensure both hinges are vertically aligned, then tighten the screws evenly. Do not overtighten.

04



Fit and Test the Door

Lift the door and lower the hinge sections together until fully engaged. Open and close the door several times. Confirm smooth operation, correct alignment and that the door can be lifted vertically from the hinges.



FIT AND TEST · IMPORTANT

Use right-hand hinges only; do not mix left- and right-hand components. Install both hinges in the same orientation. Maintain sufficient overhead clearance for door removal. Support the door during installation and removal. Use fixings suitable for the door material, frame construction and door weight.

Care & Maintenance



MILD DETERGENT & WARM WATER

Clean regularly using warm water and mild detergent.



SOFT CLOTH ONLY

Clean and dry with a soft cloth only.



NO ACIDIC OR ABRASIVE CLEANERS

Do not use acidic cleaners, abrasive products, scouring pads or coarse brushes, as these may damage the finish.