rainco

EASY DOOR REMOVAL, RIGHT-HAND CONFIGURATION

LOMBARDY RIGHT HAND LIFT OFF HINGES

AT A GLANCE

BEST FOR	MATERIAL	INSTALLATION
Right-hand internal doors requiring convenient removal for access, maintenance or replacement	Crafted from Stainless Steel 304	Recessed or surface-mounted

rainco

Side View

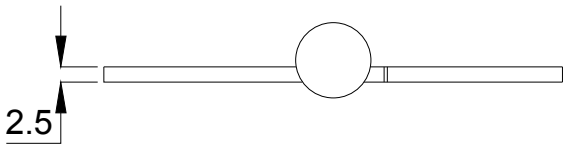

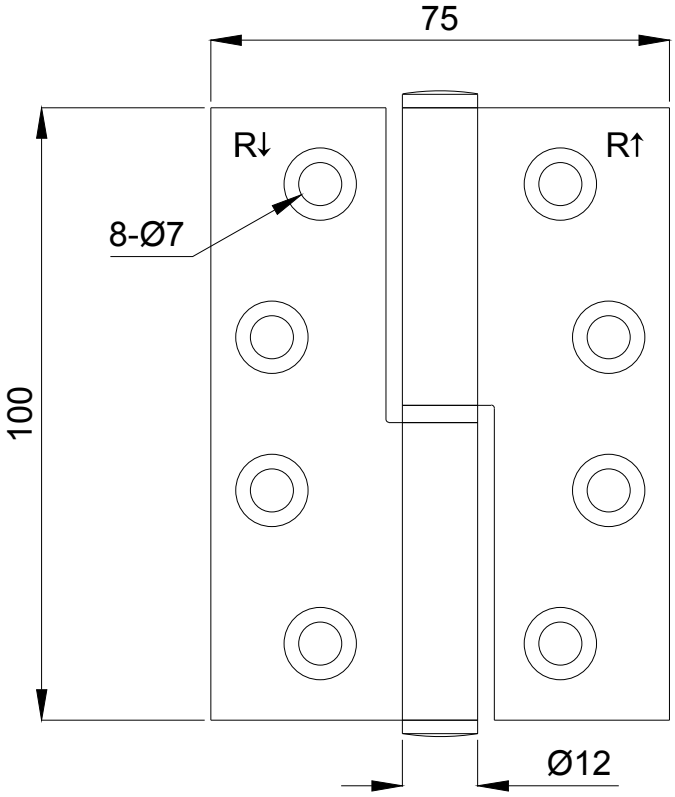

Specifications

MATERIAL

Crafted from **Stainless Steel 304**

INSTALLATION TYPE

Recessed or surface-mounted · Single-hole installation

CONFIGURATION

Lift-off hinge · Quantity: Pair · Handing: Right hand · Eight countersunk fixing holes per hinge

DIMENSIONS

Overall height **100 mm** · Overall open width **75 mm** · Leaf thickness **2.5 mm** · Knuckle diameter **Ø12 mm** · Fixing holes **8 × Ø7 mm** per hinge

DOORS

Suitable for internal hinged doors

rainco

3D View

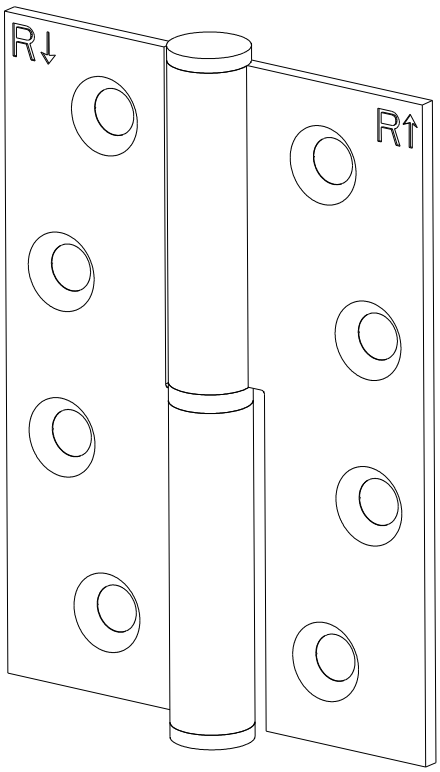

What's in the box

INCLUDED

2x	Right-hand lift-off hinges
16x	Fixing screws

Finish Options

Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

01



Position the Hinges

Support the door in its correct position within the frame. Position both hinges with the R markings and directional arrows oriented as shown in the right-hand installation diagram. Mark the hinge outlines and fixing-hole positions.

02



Prepare the Door and Frame

If recessing the hinges, cut the mortises to match the 2.5 mm hinge-leaf thickness. The leaves must sit flat and flush. Drill pilot holes at the marked fixing points.

03



Secure the Hinges

Separate the lift-off hinge leaves. Fix the corresponding leaves to the door and frame using suitable screws. Ensure both hinges are vertically aligned, then tighten the screws evenly. Do not overtighten.

04



Fit and Test the Door

Lift the door and lower the hinge sections together until fully engaged. Open and close the door several times. Confirm smooth operation, correct alignment and that the door can be lifted vertically from the hinges.

FIT AND TEST · IMPORTANT

Use right-hand hinges only; do not mix left- and right-hand components. Install both hinges in the same orientation. Maintain sufficient overhead clearance for door removal. Support the door during installation and removal. Use fixings suitable for the door material, frame construction and door weight.

Care & Maintenance

MILD DETERGENT & WARM WATER

Clean regularly using warm water and mild detergent.

SOFT CLOTH ONLY

Clean and dry with a soft cloth only.

NO ACIDIC OR ABRASIVE CLEANERS

Do not use acidic cleaners, abrasive products, scouring pads or coarse brushes, as these may damage the finish.