

SMOOTH ENTRY, EVERYDAY COMFORT

LOMBARDY PASSAGE DOOR HANDLE

AT A GLANCE



BEST FOR

Hallways, living areas,
laundries, wardrobes
and other internal
rooms where privacy
locking is not required






MATERIAL

Crafted from Stainless
Steel 304



INSTALLATION

Concealed
through-fixing

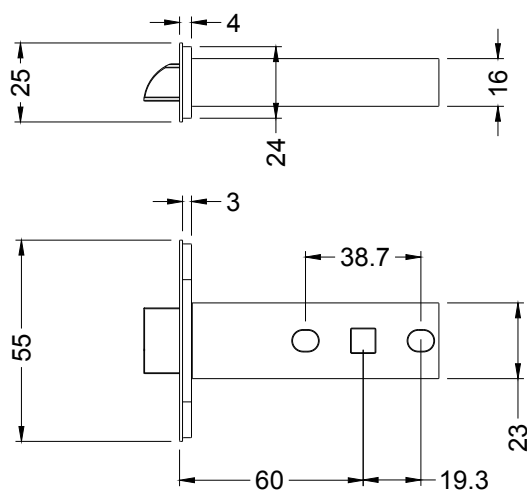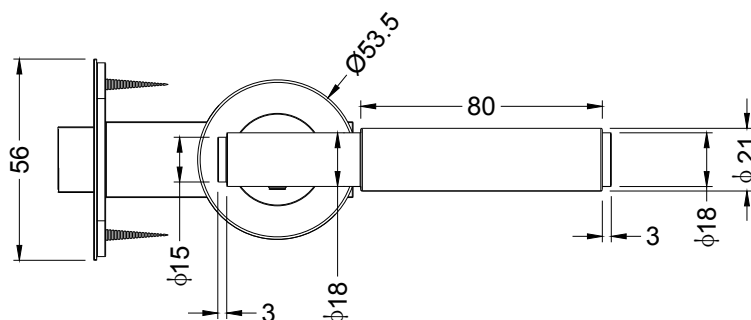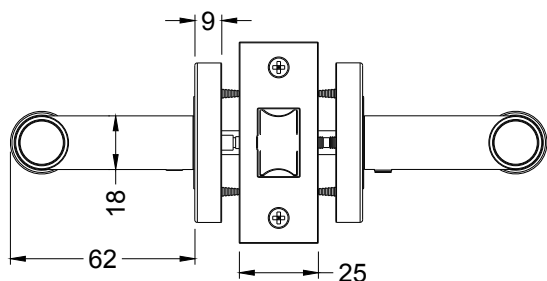

Specifications

MATERIAL

Crafted from **Stainless Steel 304**

INSTALLATION TYPE

Concealed through-fixing

PROFILE

Rose diameter **Ø53.5 mm** · **60 mm** backset

DOORS

Suitable for internal hinged doors · Compatible with left- and right-opening doors

HANDLE TYPE

Passage lever set · Tubular passage latch · Non-locking operation · Non-locking operation

DIMENSIONS


Overall handle length **135 mm** · Grip length **80 mm** · Rose diameter **Ø53.5 mm** · Rose depth **6 mm**

LEVER · GRIP DIAMETER

Lever stem diameter **Ø18 mm** · Grip diameter **Ø21 mm** · Handle-end diameter **Ø18 mm**

BACKSET

Latch backset **60 mm** · Latch faceplate **55 × 23 mm** · Faceplate fixing centres **48.7 mm** · Latch-body length **73.5 mm**

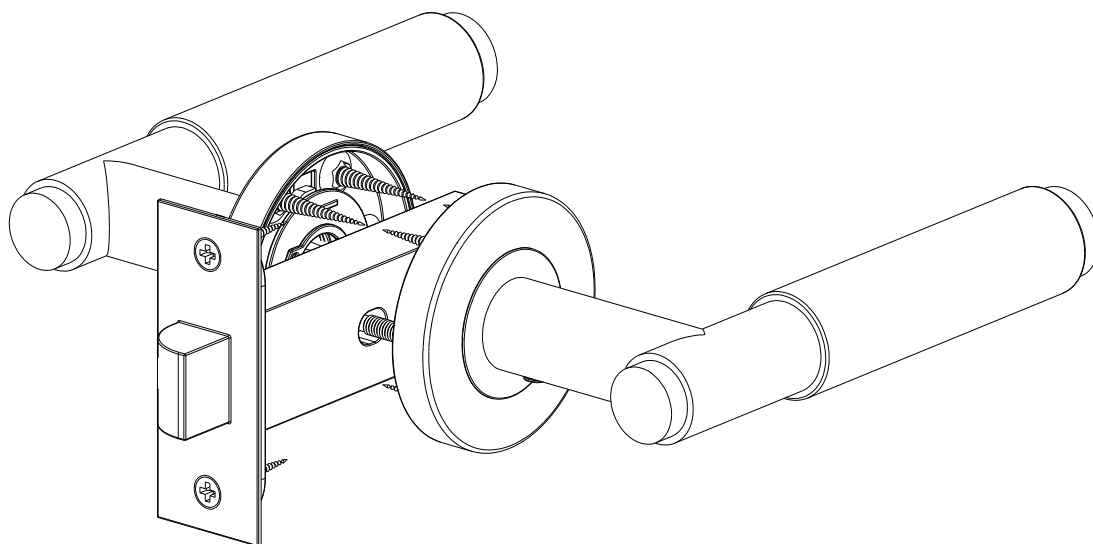

What's in the box

INCLUDED

1x	Pair of lever handles
2x	Decorative rose covers
1x	Passage latch
1x	Square spindle
1x	Through-fixing set
1x	Strike plate
4x	Fixing screws

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD




Brushed Copper
PVD



Gun Metal
PVD

Installation Guide


01

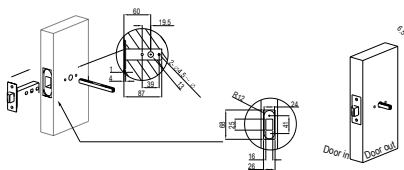

Prepare the Door

Mark the handle centreline on the door face and transfer it onto the door edge. Drill the spindle and fixing holes. Mortise the door edge for the latch body and recess the faceplate until flush.


02

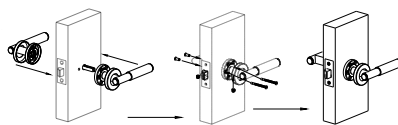

Install the Latch and Spindle

Insert the passage latch with the bevelled side facing the closing direction. Secure the faceplate with the supplied screws. Insert the square spindle through the latch follower, with the spindle groove positioned downward as shown.

03

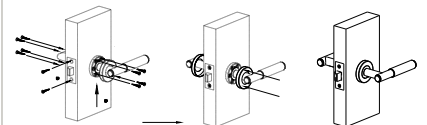

Fit the Handles

Position a handle assembly on each side of the door, ensuring both engage correctly with the spindle. Install the through-fixings and tighten evenly. Secure the handle grub screws without overtightening.



FIT THE COVERS AND TEST

Fit the decorative rose covers over the mounting plates. Test both handles with the door open. Fit and align the strike plate, then confirm the door closes and latches smoothly.

Care & Maintenance



MILD DETERGENT & WARM WATER

Clean regularly using warm water and mild detergent.



SOFT CLOTH ONLY

Clean and dry with a soft cloth only.



NO ACIDIC OR ABRASIVE CLEANERS

Do not use acidic cleaners, abrasive products, scouring pads or coarse brushes, as these may damage the finish.

Important

This non-locking passage set is not suitable where privacy or security is required.

Verify all dimensions before drilling.

The latch bolt must face the closing direction.

Do not overtighten the fixings or grub screws.

Test the mechanism before closing the door.

Installation should be completed by an experienced installer.