


EVERYDAY COMFORT, PRIVACY WHEN NEEDED

LOMBARDY PRIVACY DOOR HANDLE

AT A GLANCE

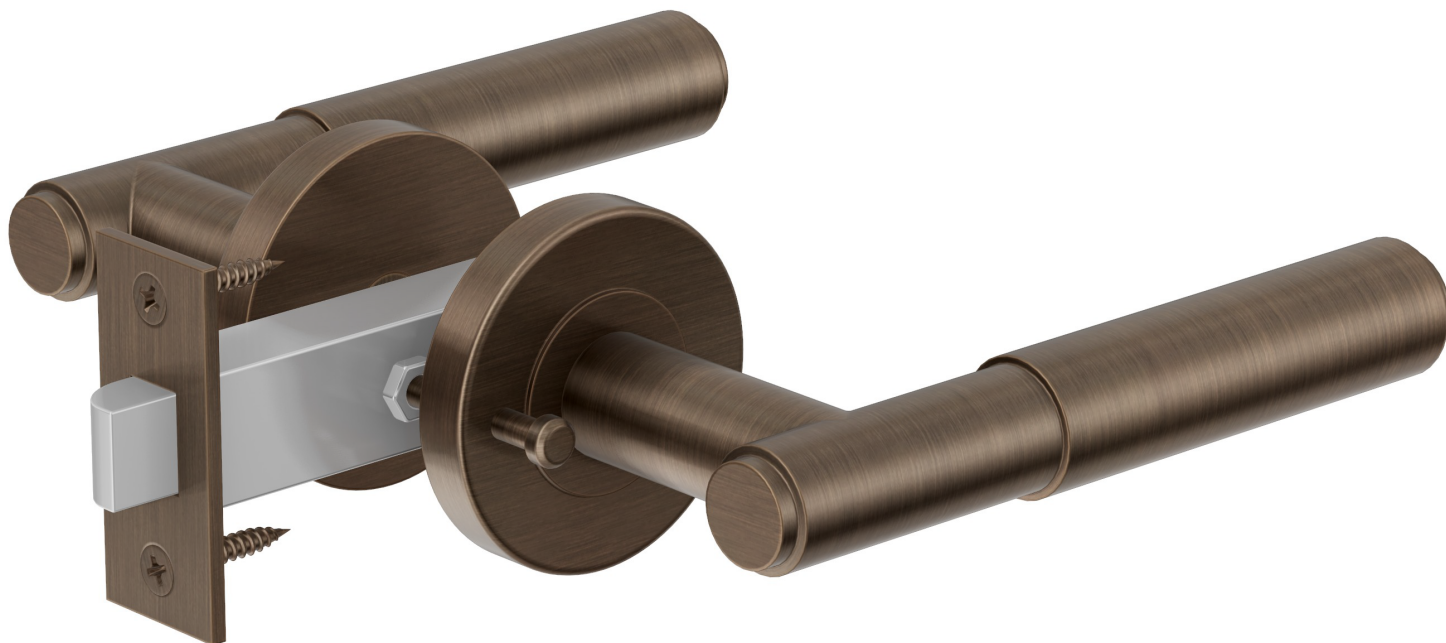

BEST FOR

Bathrooms, powder rooms, bedrooms and other internal spaces requiring privacy without keyed security




MATERIAL

Crafted from Stainless Steel 304



INSTALLATION

Concealed through-fixing

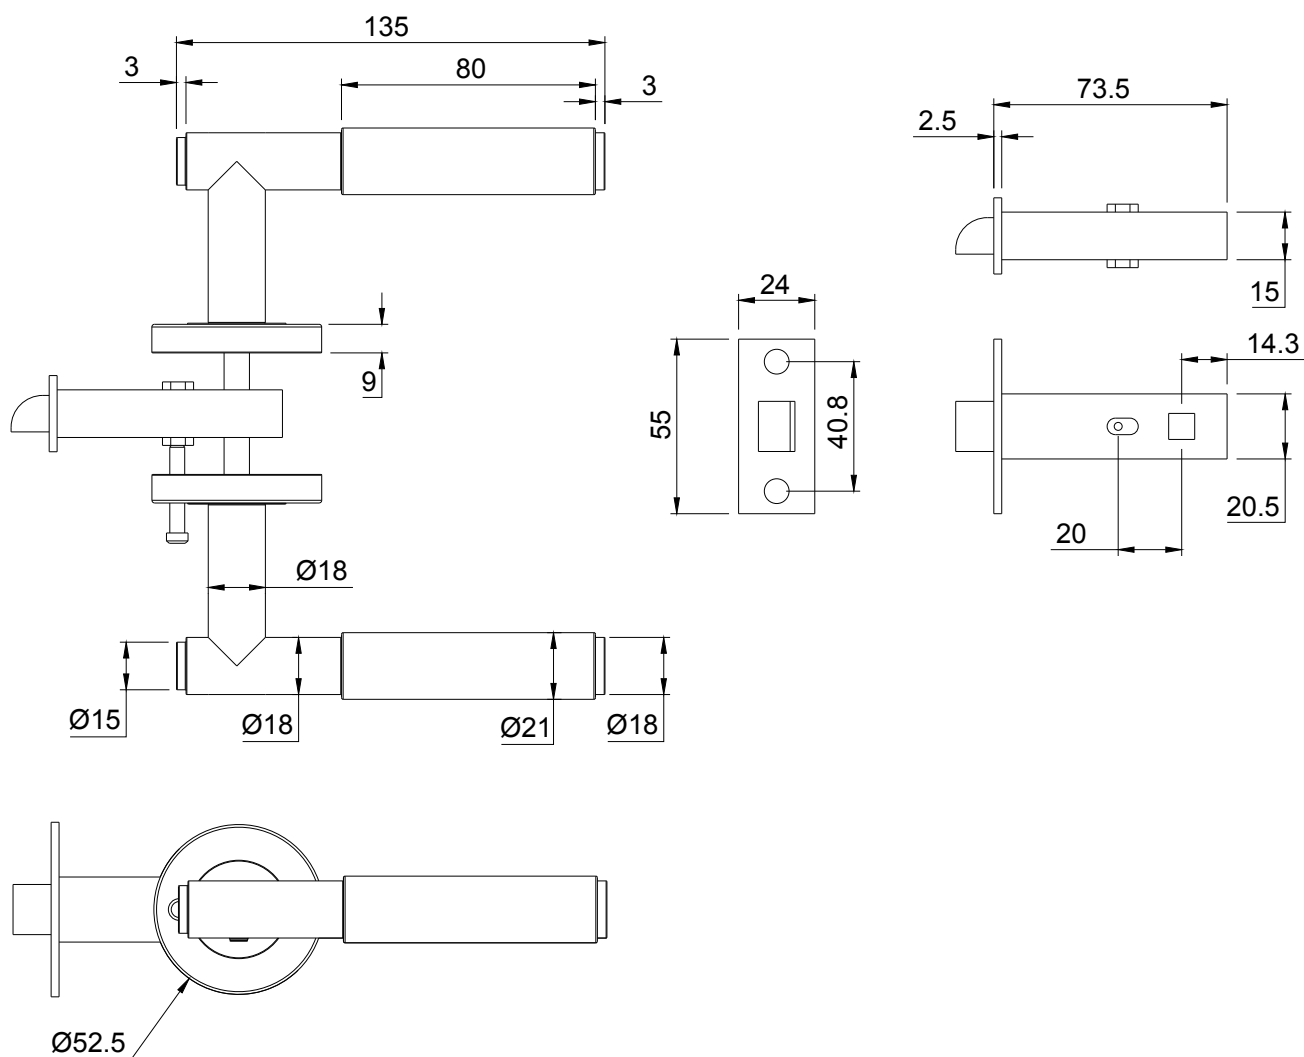

Specifications

MATERIAL

Crafted from **Stainless Steel 304**

INSTALLATION TYPE

Concealed through-fixing

PROFILE

Rose diameter **Ø52.5 mm** · 60 mm backset

DOORS

Suitable for internal hinged doors · Compatible with left- and right-opening doors

HANDLE TYPE

Privacy lever set · Push-pull privacy control · Tubular privacy latch · External emergency-release function

DIMENSIONS



Overall handle length **135 mm** · Grip length **80 mm** · Rose diameter **Ø52.5 mm** · Rose depth **9 mm**

LEVER · GRIP DIAMETER


Lever stem diameter **Ø18 mm** · Grip diameter **Ø21 mm** · Handle-end diameter **Ø18 mm** · End-button diameter **Ø15 mm**

BACKSET

Latch backset **60 mm** · Latch-body length **73.5 mm** · Latch faceplate **55 × 24 mm** · Faceplate fixing centres **40.8 mm**

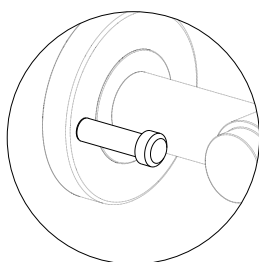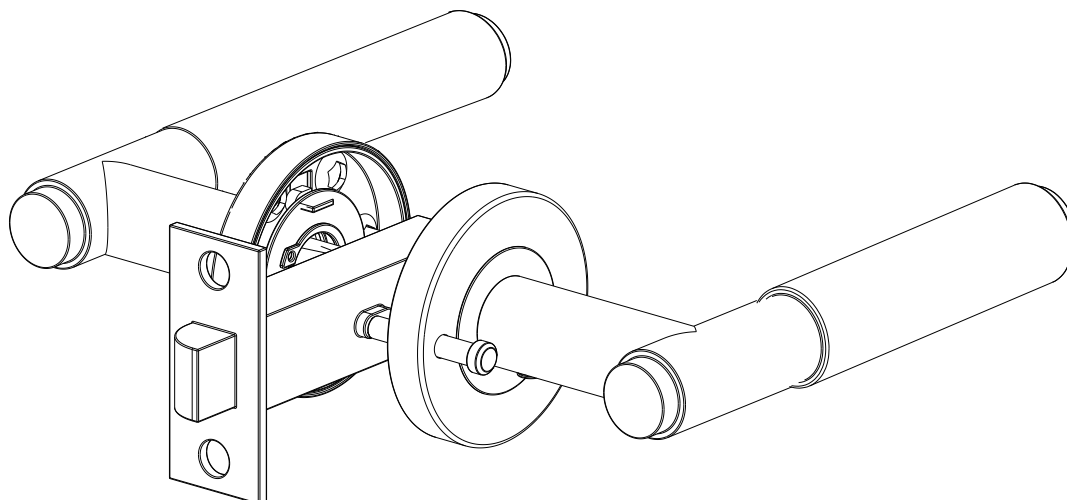

Press in to close
Pull out to open

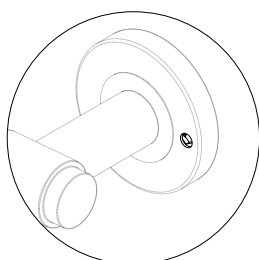

For unlocking in an emergency



What's in the box

INCLUDED

1x	Pair of privacy lever handles
2x	Decorative rose covers
1x	Privacy latch
1x	Square spindle
1x	Through-fixing set
1x	Strike plate
4x	Fixing screws

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD




Brushed Copper
PVD




Gun Metal
PVD

01

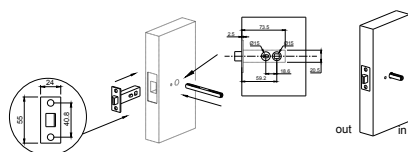


Mark the handle centreline on the door face and transfer it onto the door edge. Drill the spindle and fixing holes. Mortise the door edge for the latch body and recess the faceplate until flush.

02

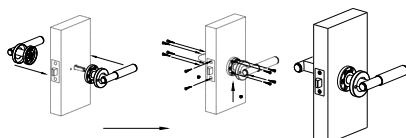

Insert the passage latch with the bevelled side facing the closing direction. Secure the faceplate with the supplied screws. Insert the square spindle through the latch follower, with the spindle groove positioned downward as shown.

03

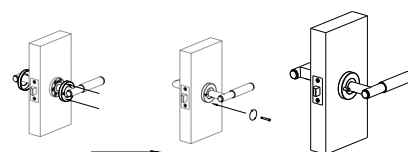

Position a handle assembly on each side of the door, ensuring both engage correctly with the spindle. Install the through-fixings and tighten evenly. Secure the handle grub screws without overtightening.



Clean regularly using warm water and mild detergent.



Clean and dry with a soft cloth only.



Do not use acidic cleaners, abrasive products, scouring pads or coarse brushes, as these may damage the finish.

This is a privacy set and is not designed as a keyed security lock.

Verify all dimensions before drilling.

The latch bolt must face the closing direction.

Do not overtighten the fixings or grub screws.

Test the mechanism before closing the door.

Installation should be completed by an experienced installer.