



PRIVACY BUILT INTO A SLIM PROFILE

LOMBARDY PRIVACY SLIDING DOOR LOCK

AT A GLANCE



BEST FOR

Bathrooms, powder rooms, bedrooms and other internal sliding doors requiring privacy without keyed security




MATERIAL

Crafted from Stainless Steel 304



INSTALLATION

Recessed

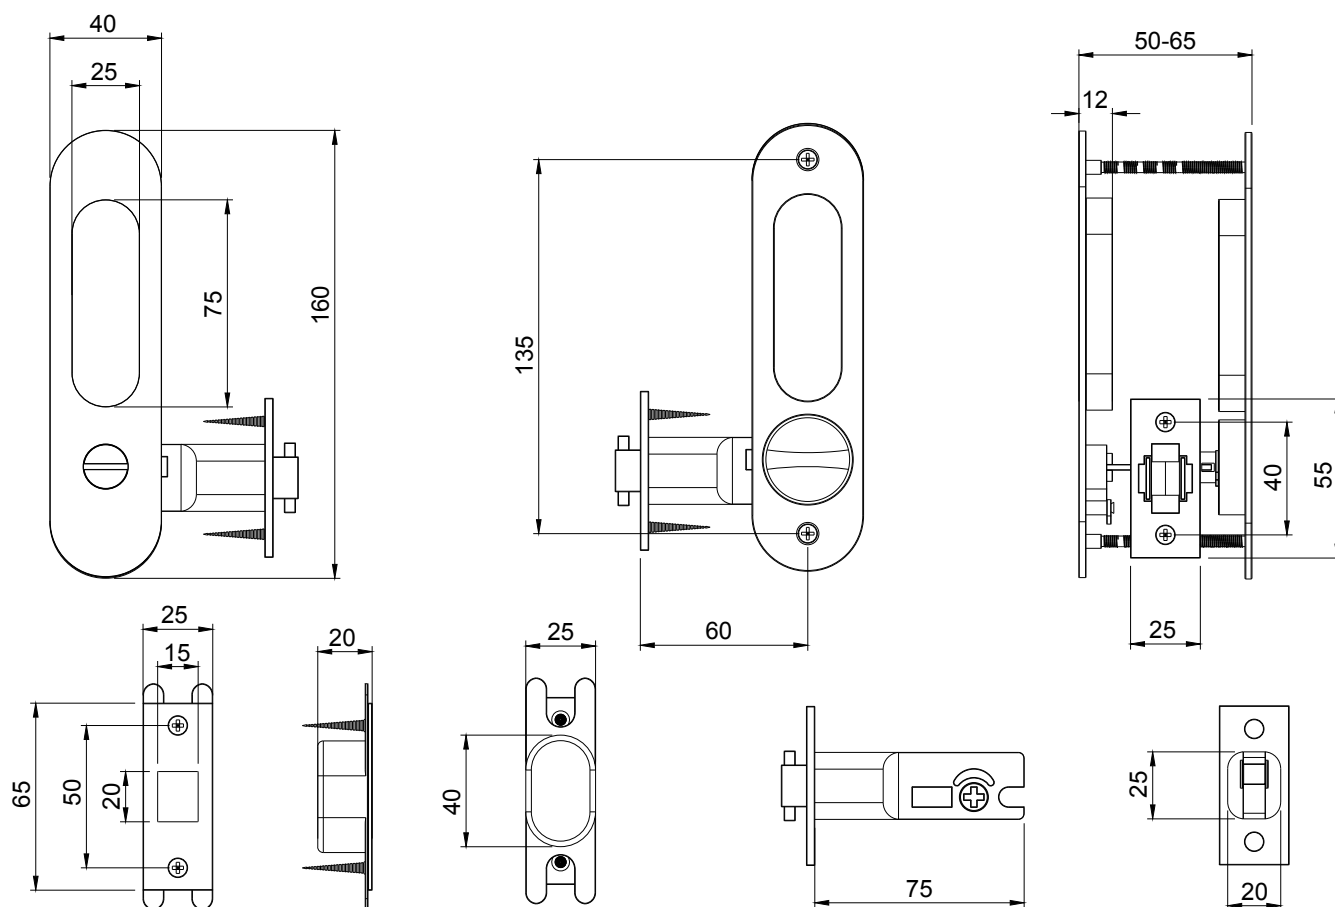

Specifications



MATERIAL

Crafted from **Stainless Steel 304**



INSTALLATION TYPE

Recessed · Backset **60 mm**



CONFIGURATION

Internal thumbturn · External emergency release · Integrated finger pulls

DIMENSIONS · INTERNAL PULL

Overall height **160 mm** · Overall width **40 mm** · Finger opening **75x25 mm** · Recess depth **12 mm**

DIMENSIONS · EXTERNAL PULL


Overall height **135 mm** · Lock backset **60 mm**

LOCK TYPE

Sliding-door privacy lock · Not designed as a keyed security lock

SLIDING DOORS

Suitable for **50–65 mm** internal sliding doors · Adjustable through-fixing system

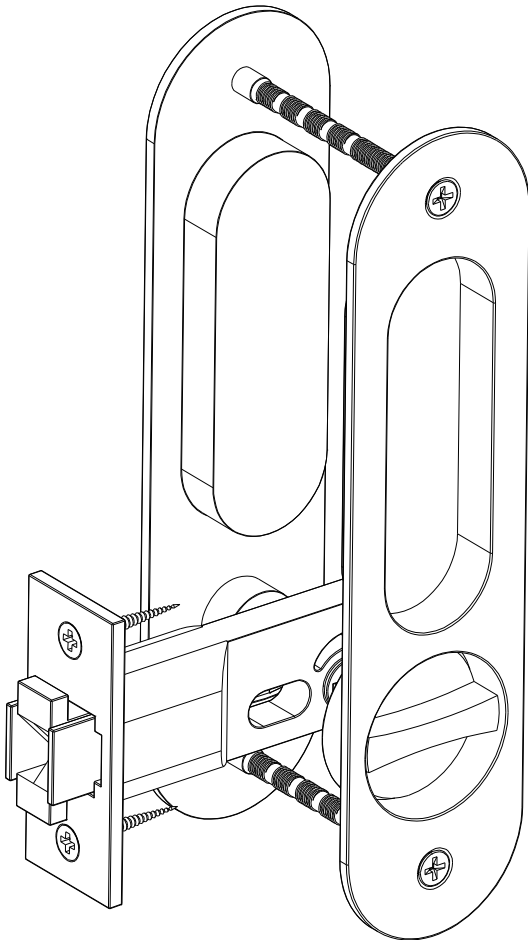

What's in the box

INCLUDED

1x	Internal flush pull with thumbturn
1x	External flush pull with emergency release
1x	Privacy lock body
1x	Strike plate
1x	Connecting spindle
1x	Backing or pad plate
1x	Through-fixing screws and nuts
1x	Faceplate and strike-plate fixing screws

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD




Brushed Copper
PVD



Gun Metal
PVD

Installation Guide


01

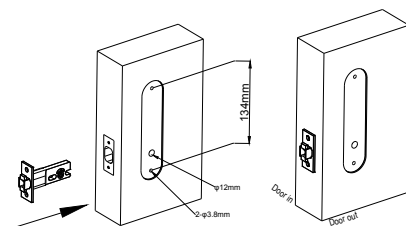

Prepare the Door

Mark the lock and handle positions on both faces and the door edge. Drill the Ø12 mm centre hole and two Ø3.8 mm fixing holes as shown. Mortise the door edge for the lock body and recess the faceplate until flush.


02

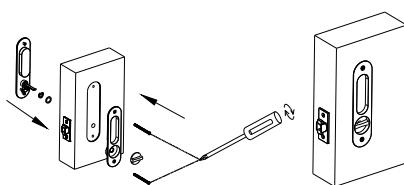

Install the Lock and Pulls

Insert the privacy lock into the door edge and secure the faceplate. Position the internal pull, external pull, backing plate and connecting components on their correct sides. Ensure the thumbturn and emergency release engage with the lock.

03

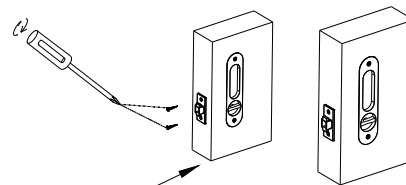

Secure and Test

Tighten the through-fixings evenly, then secure the remaining lock fixings. Do not overtighten.



FIT AND TEST · IMPORTANT

Fit and align the strike plate. Test the finger pulls, thumbturn, locking bolt and external emergency release with the door open before checking the closed-door operation.

Care & Maintenance



MILD DETERGENT & WARM WATER

Clean regularly using warm water and mild detergent.



SOFT CLOTH ONLY

Clean and dry with a soft cloth only.



NO ACIDIC OR ABRASIVE CLEANERS

Do not use acidic cleaners, abrasive products, scouring pads or coarse brushes, as these may damage the finish.

Important

This privacy lock is not intended to provide keyed security.

Install the thumbturn and emergency release on the correct sides.

Verify all dimensions against the physical product before cutting.

Check the door thickness and internal construction before drilling.

Do not overtighten the fixings.

Test the lock and emergency release before closing the door.

Installation should be completed by an experienced installer.