
rainco

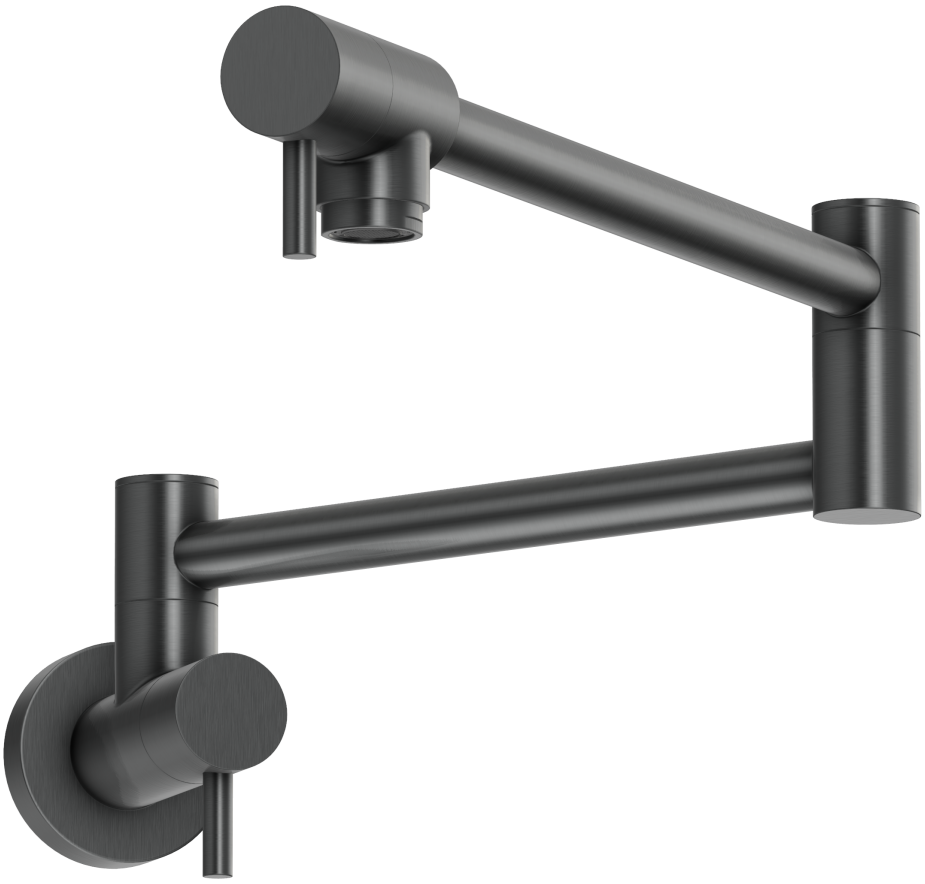

FUNCTIONAL, FOLDABLE, AND BUILT TO WORK BEAUTIFULLY

POT FILLER

AT A GLANCE

BEST FOR

Bringing water right to your cooktop, cutting down on heavy lifting and cluttered benches

FEEL


Stead and foldable

INSTALLATION

Wall-mounted, plumber required

rainco

Front View · Side View

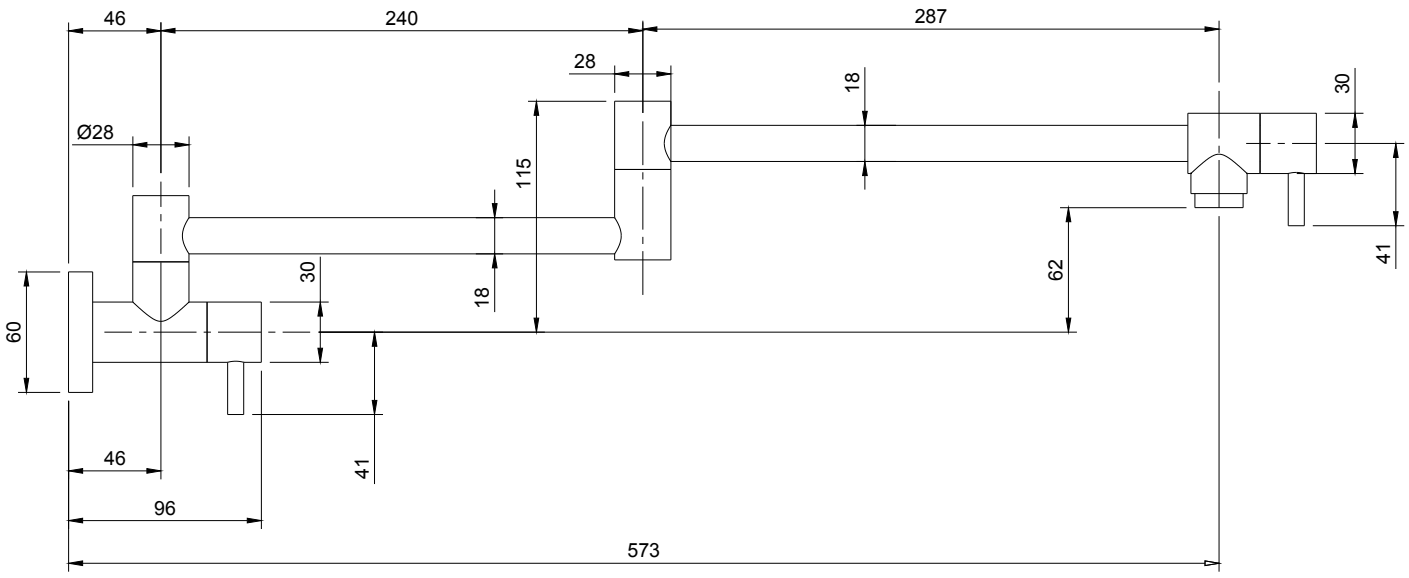

Specifications

MATERIAL

Solid **Brass**

CARTRIDGE

Citec ceramic Cartridge

FLOW RATE

7.5 L/min · WELS 4 Star

PRESSURE RANGE

50–800 kPa

TEMPERATURE

4–80 °C

MOUNTING


Wall-mounted

DIMENSIONS

Wall projection (At full extension) **573 mm** · First extension length **240 mm** · Second extension length **287 mm**

rainco

Exploded View

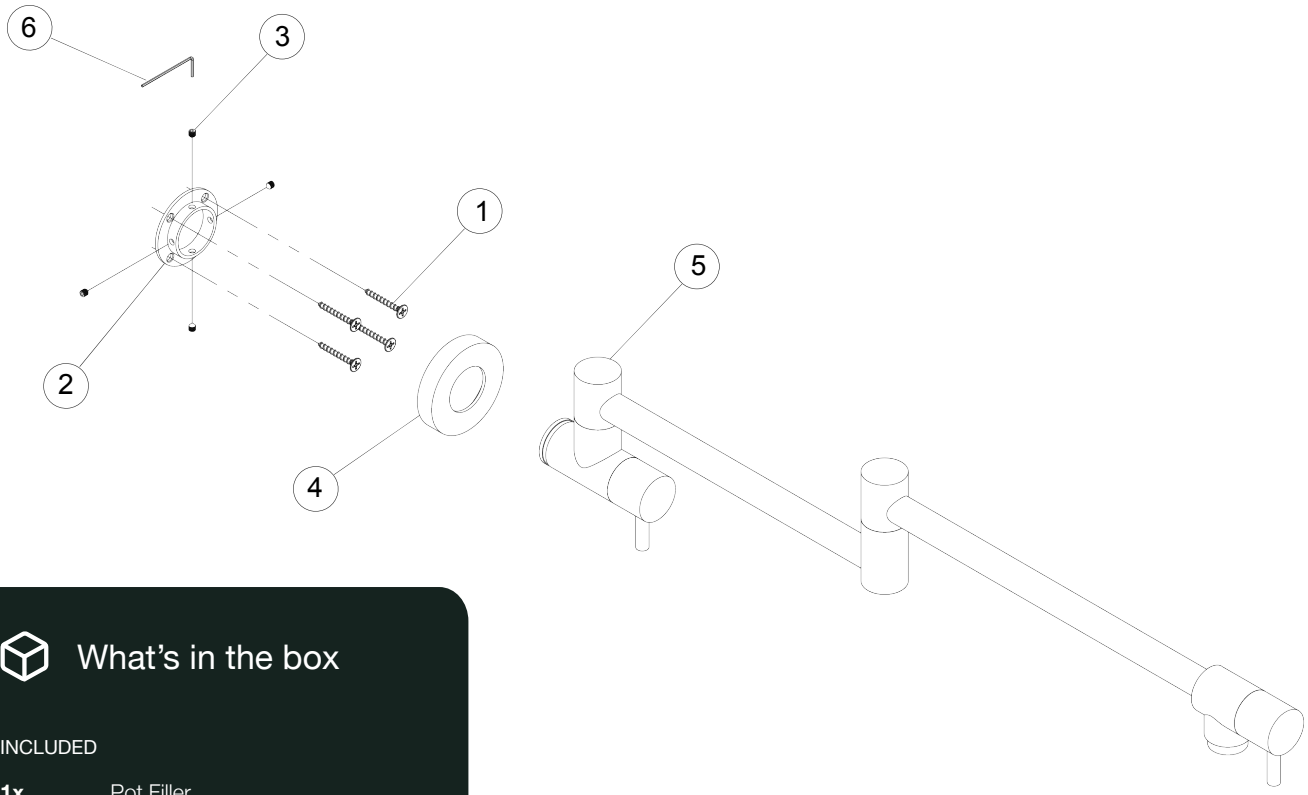

What's in the box

INCLUDED

1x	Pot Filler
1x	Cover Ring
1x	Wall Mounting Bracket
4x	Fixing Screws
4x	Grubs Screws
4x	Hollow Wall Anchors
1x	Mini Hex Wrench

EXPLODED VIEW

1. Fixing Screws
2. Wall Mounting Bracket
3. Grub Screws
4. Cover Ring
5. Pot Filler
6. Mini Hex Wrench

Finish Options


Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Position Mounting Base

Place the mounting base in the required position and mark the holes.


02

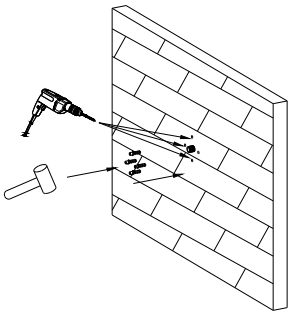

Drill Holes

Drill the holes at the marked positions and insert the wall plugs.


03

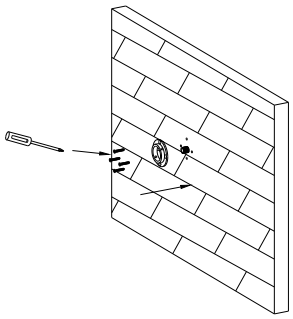

Secure Mounting Base

Fix the mounting base in position using the screws and tighten securely.

04

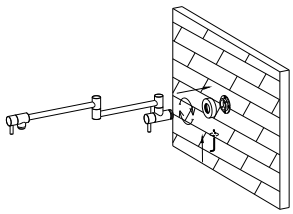

Install Product

Put the cover ring onto the product. Attach the product to the mounting base and tighten with the Allen key.

INSTALLATION GUIDE

Ensure all components are ready before starting installation.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

4 STAR · 7.5 L/MIN

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4