
rainco

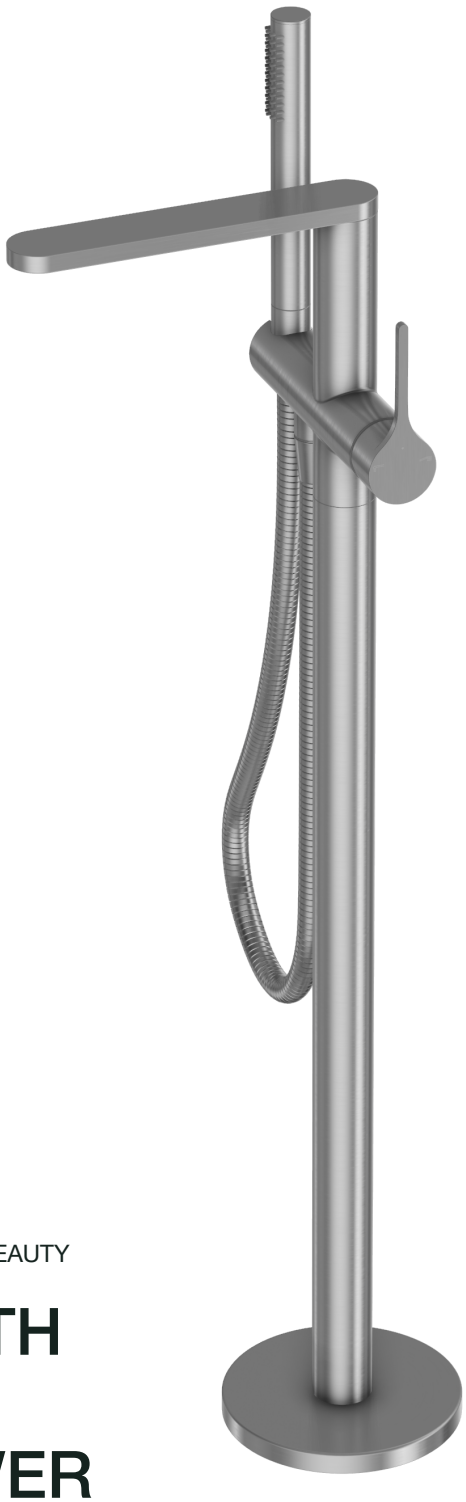

REFINED FUNCTION, ENDURING BEAUTY


SERENO BATH FILLER WITH HAND SHOWER


AT A GLANCE

BEST FOR	HEIGHT	FEEL	INSTALLATION
Enhancing your bath experience	Stands tall, accompanied by a hand shower wand that offers targeted functionality	Effortless control and handling	Floor-mounted, plumber required

rainco

Front View · Side View

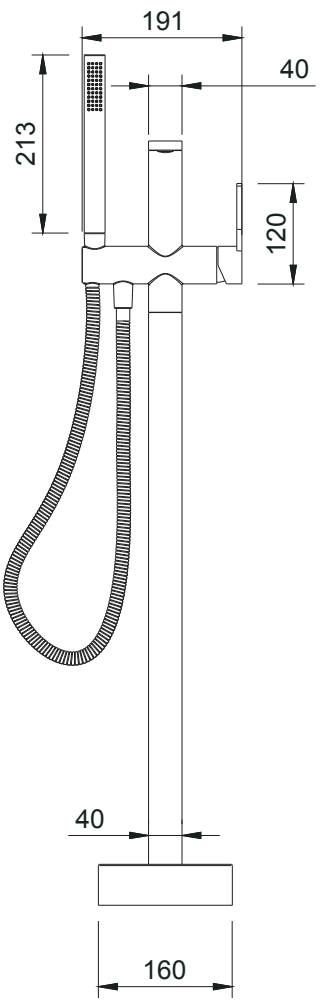

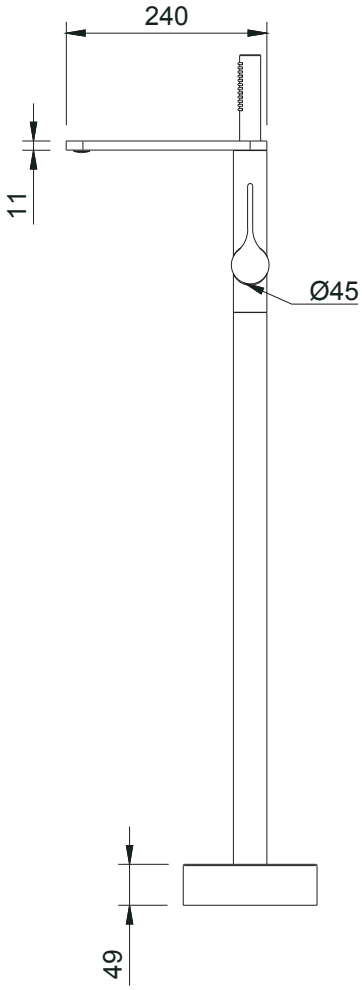

Specifications

MATERIAL

Premium **SS304** stainless steel

CARTRIDGE

Citec ceramic · **Ø35 mm**

FLOW RATE

No flow restriction

PRESSURE RANGE

50–800 kPa

TEMPERATURE

4–80 °C

CONNECTIONS

Standard **G1/2”**

MOUNTING


Floor-mounted

DIMENSIONS

Height **880 mm** · spout **24 mm** · base **150 mm** · hand **213 mm**

rainco

Exploded View

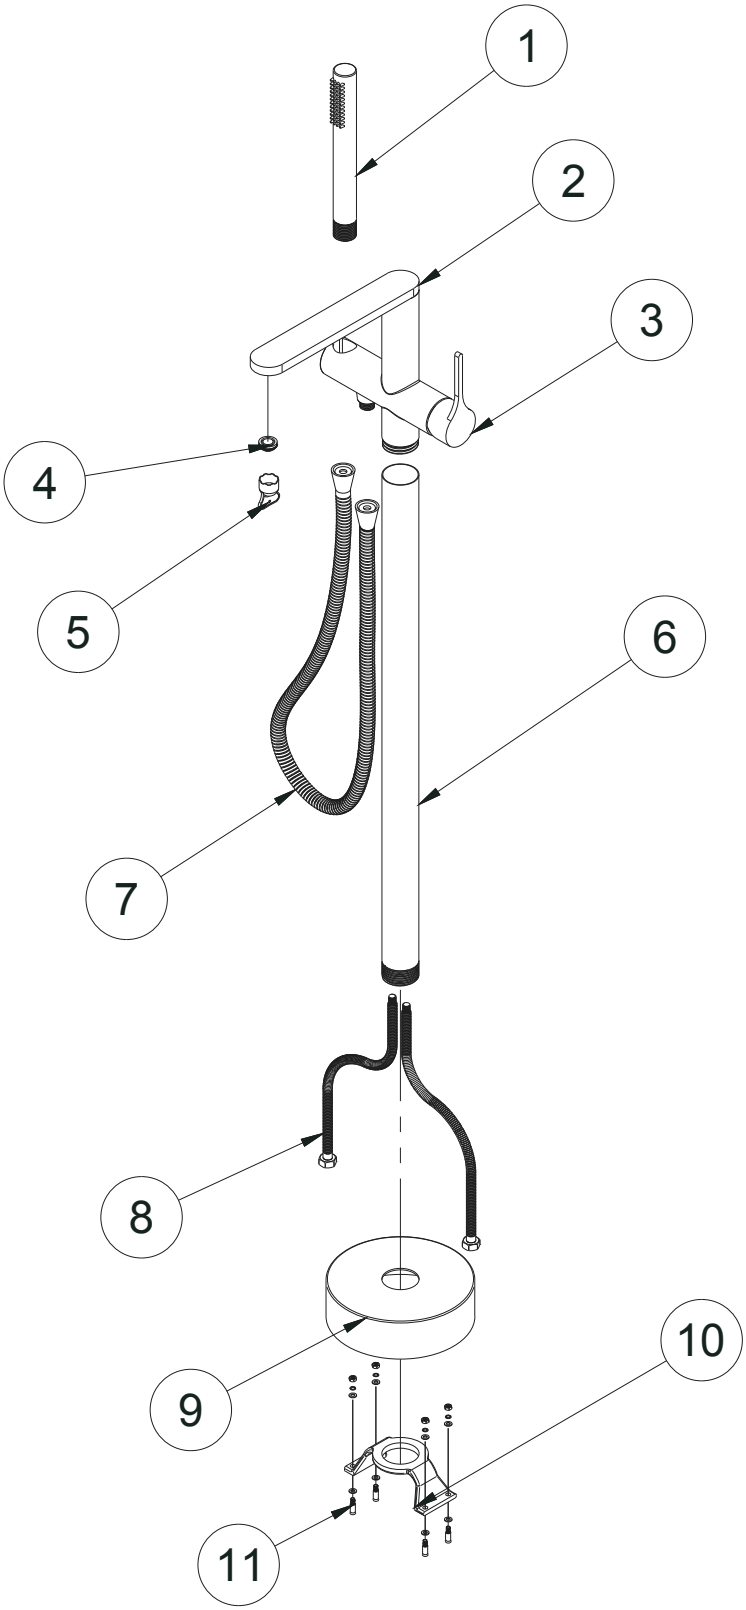

What's in the box

INCLUDED

1x	Bath Filler Stand Pipe
1x	Hand Shower Wand
1x	150cm Hand Shower Hose
1x	Base Cover Plate
1x	Mixer Body
1x	Fixing Bracket
4x	Fixing Screws
1x	Aerator Remover Tool
1x	Spare Grub Screw

EXPLODED VIEW

1. Hand Shower Wand
2. Bath Spout
3. Temperature Control Handle
4. Aerator
5. Aerator Remover Tool
6. Bath Filler Standpipe
7. Hand Shower Flexible Hose
8. Felxir Hose
9. Base Cover Plate
10. Fixing Bracket
11. Mounting Screws

Finish Options


Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Position Mixer Body

Place the mixer body in position and mark the required cut-out area.


02

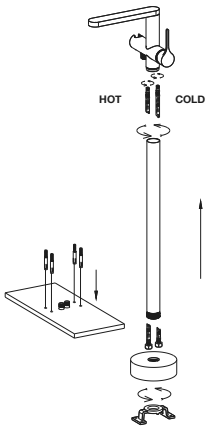

Connect Hoses

Remove the body and connect the hot (red) and cold (blue) hoses to the correct inlets.


03

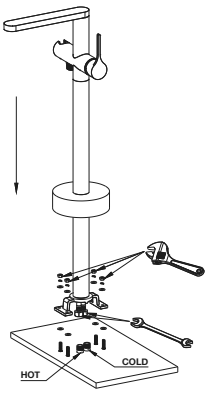

Reinstall / Connect Water

Reinstall the mixer body and connect the hoses to the water supply. Turn on the water and check for leaks. Tighten if needed.

04

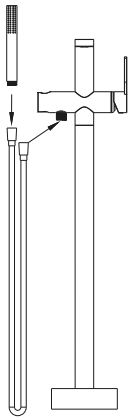

Attach Hand Shower

Connect the hand shower to the mixer body.

FINAL CHECK · TURN ON & TEST

Turn on the mixer and check that everything is working properly with no leaks.

Care & Maintenance

MILD SOAP & WARM WATER

Clean gently to keep the surface bright.

SOFT CLOTH ONLY

Never use scourers or rough pads.

NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

3 STAR · 8 L/MIN

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4