



SIMPLE FORM, LASTING IMPRESSION

## SERENO BATH SPOUT

### AT A GLANCE



#### BEST FOR

Everyday bathrooms for those who value simplicity with substance.



#### CONNECTION

G1/2 wall outlet connection.




#### FEEL

Steady water flow with a clean, minimal wall-mounted profile.



#### INSTALLATION

Wall-mounted, plumber required.

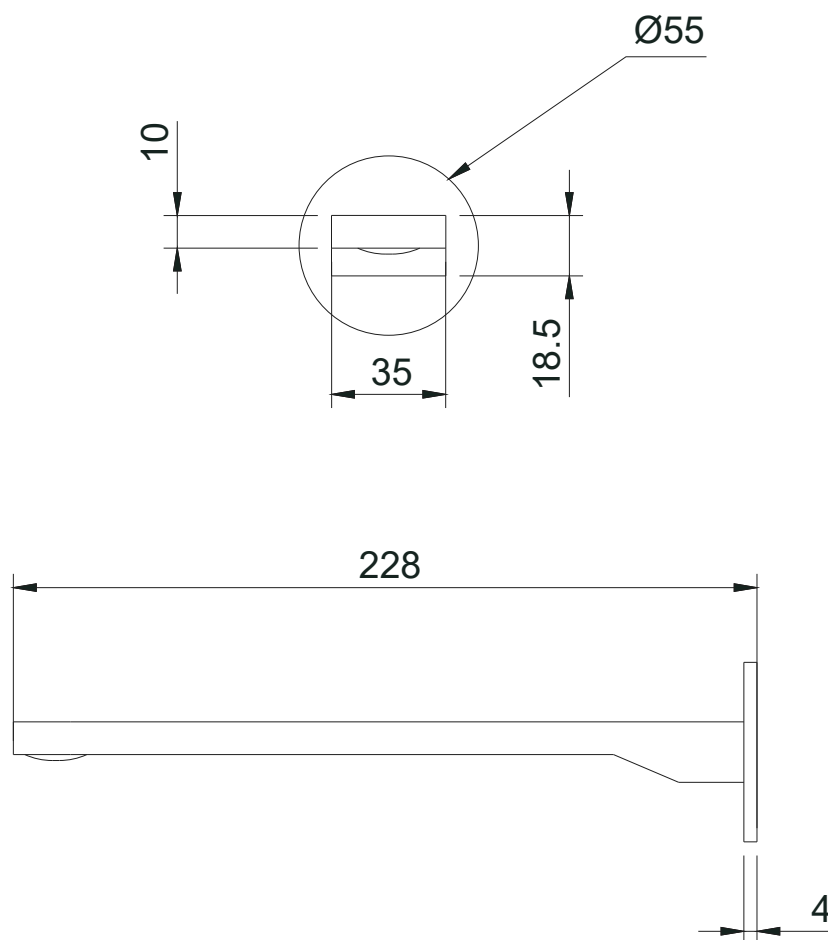

## Specifications



### MATERIAL

Lead-free **SS304** stainless steel



### CARTRIDGE

Citec ceramic cartridge



### FLOW RATE

**5 L/min** · WELS 5 Star



### PRESSURE RANGE

**50–800 kPa**



### TEMPERATURE

**4–80 °C**



### CONNECTIONS

Standard **G1/2"**




### MOUNTING

Wall-mounted · cut-out **Ø35–Ø38 mm**



### DIMENSIONS

Spout **10 mm** · length **228 mm** · cover ring **Ø55 mm**

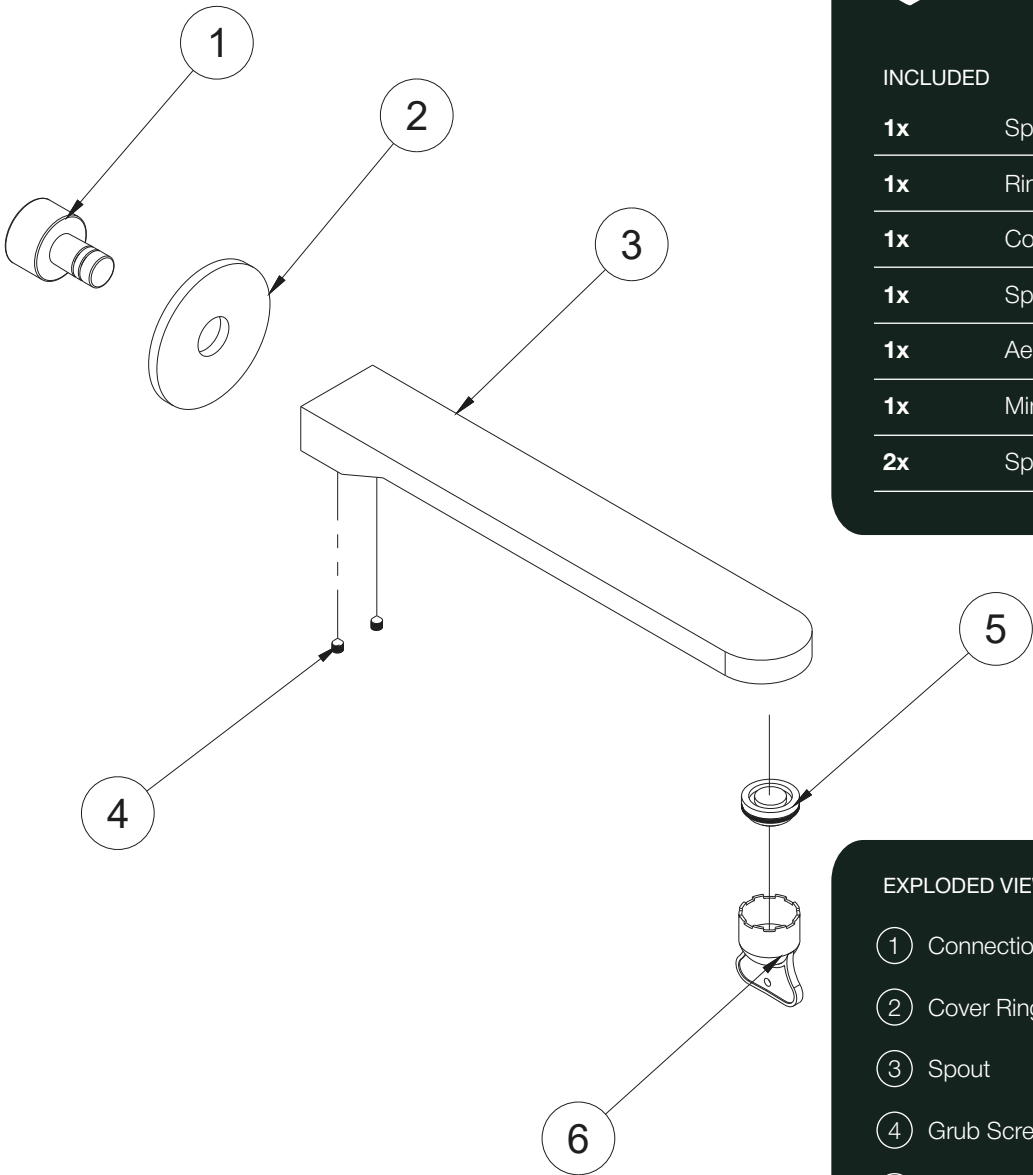

 What's in the box

INCLUDED

|    |                      |
|----|----------------------|
| 1x | Spout                |
| 1x | Ring                 |
| 1x | Connection Screw     |
| 1x | Spare Aerator        |
| 1x | Aerator Remover Tool |
| 1x | Mini Hex Wrench      |
| 2x | Spare Grub Screws    |

EXPLODED VIEW

- 1 Connection Screw
- 2 Cover Ring
- 3 Spout
- 4 Grub Screws
- 5 Aerator
- 6 Aerator Remover Tool

Finish Options



Antique Brass  
AEA



Brushed Nickel  
AEA



Brushed Brass  
PVD



Brushed Copper  
PVD




Gun Metal  
PVD

## Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



### Check wall outlet

Confirm the wall outlet is G1/2 and compatible with the spout connection. Turn off the water supply and flush the pipework to remove debris and impurities.


02



### Fit cover plate

Place the cover plate over the wall outlet. Connect the spout inlet to the outlet and tighten securely, ensuring a firm fit against the wall.


03



### Attach the spout

Attach the spout body, align it to the desired position and tighten the grub screws / fixing points to secure it in place.

04



### Test for leaks

Turn on the water supply and allow water to run through the spout. Check all connections and confirm there are no leaks before sealing or tiling.



### FINAL CHECK - TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the spout has been fully tested and confirmed leak-free.

## Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

## Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

5 STAR · 5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4