




SIMPLE FORM, LASTING IMPRESSION

SERENO BATH SPOUT

AT A GLANCE

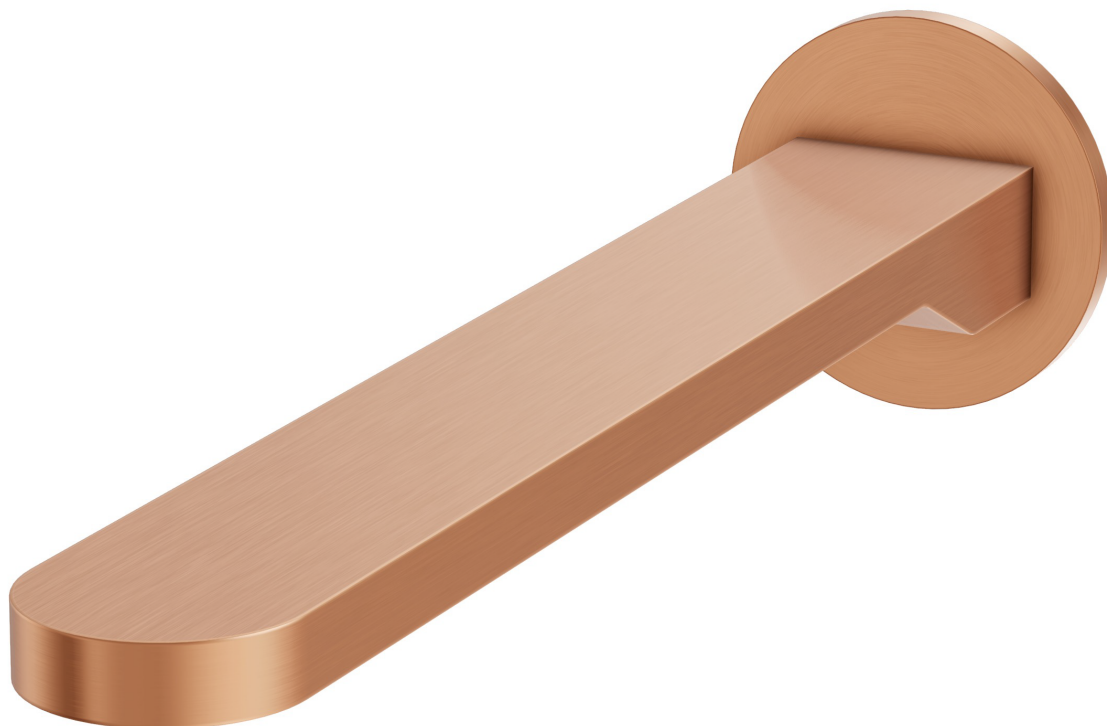

BEST FOR

Everyday bathrooms for those who value simplicity with substance.



CONNECTION

G1/2 wall outlet connection.




FEEL

Steady water flow with a clean, minimal wall-mounted profile.



INSTALLATION

Wall-mounted, plumber required.

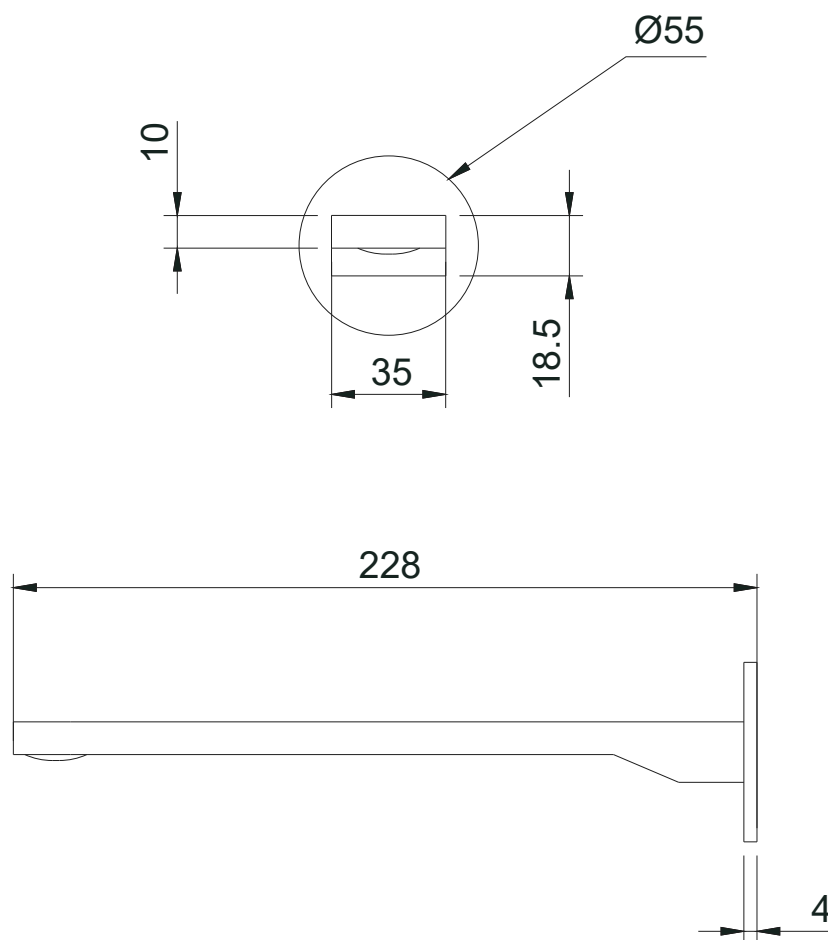

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic cartridge



FLOW RATE

5 L/min · WELS 5 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Wall-mounted · cut-out **Ø35-Ø38 mm**



DIMENSIONS

Spout **10 mm** · length **228 mm** · cover ring **Ø55 mm**

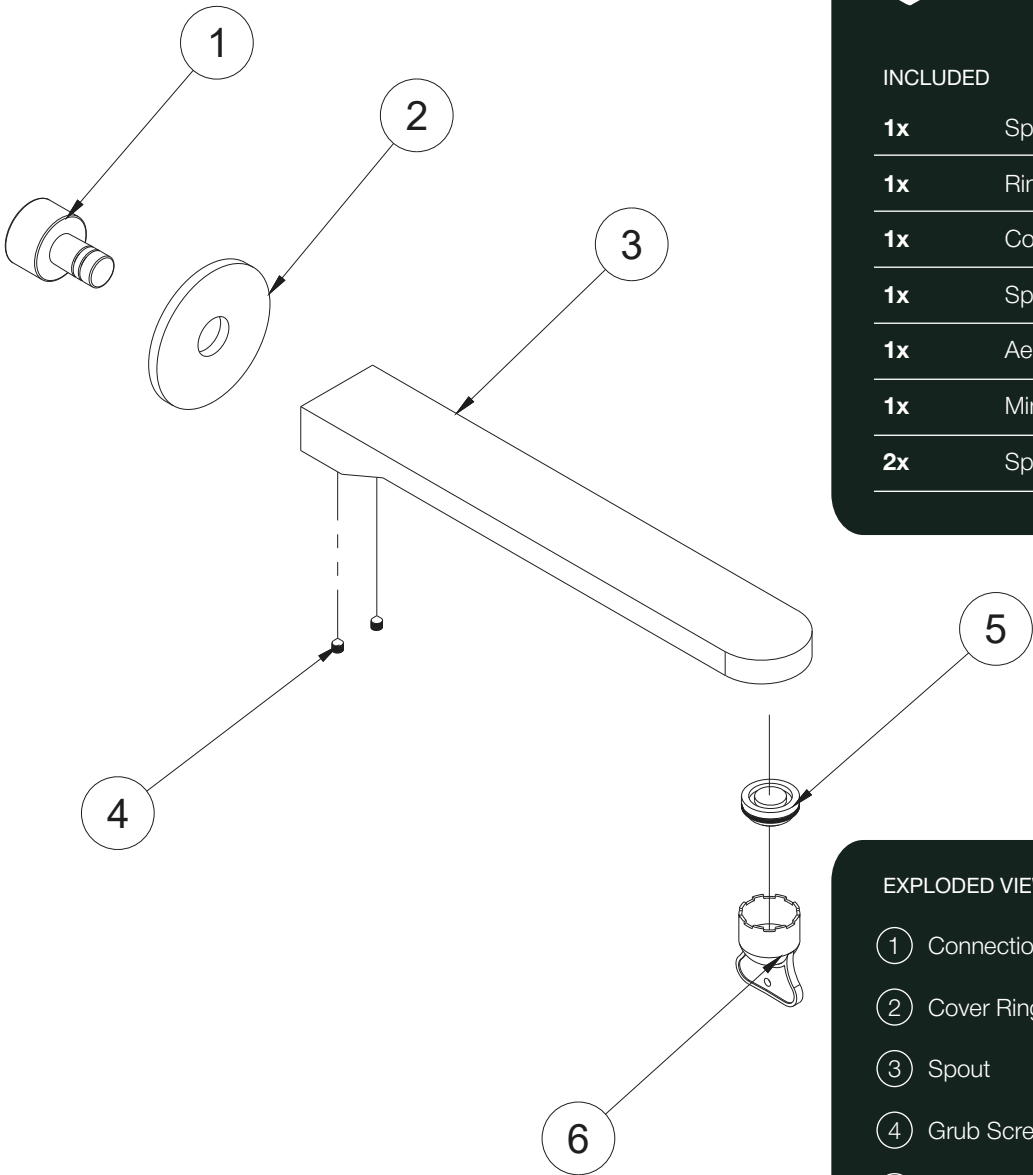

 What's in the box

INCLUDED

1x	Spout
1x	Ring
1x	Connection Screw
1x	Spare Aerator
1x	Aerator Remover Tool
1x	Mini Hex Wrench
2x	Spare Grub Screws

EXPLODED VIEW

- 1 Connection Screw
- 2 Cover Ring
- 3 Spout
- 4 Grub Screws
- 5 Aerator
- 6 Aerator Remover Tool

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Check wall outlet

Confirm the wall outlet is G1/2 and compatible with the spout connection. Turn off the water supply and flush the pipework to remove debris and impurities.


02



Fit cover plate

Place the cover plate over the wall outlet. Connect the spout inlet to the outlet and tighten securely, ensuring a firm fit against the wall.


03



Attach the spout

Attach the spout body, align it to the desired position and tighten the grub screws / fixing points to secure it in place.

04



Test for leaks

Turn on the water supply and allow water to run through the spout. Check all connections and confirm there are no leaks before sealing or tiling.



FINAL CHECK - TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the spout has been fully tested and confirmed leak-free.

Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean with mild soap and warm water.



SOFT CLOTH ONLY

Use soft cloth only.



NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

5 STAR · 5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4