
rainco

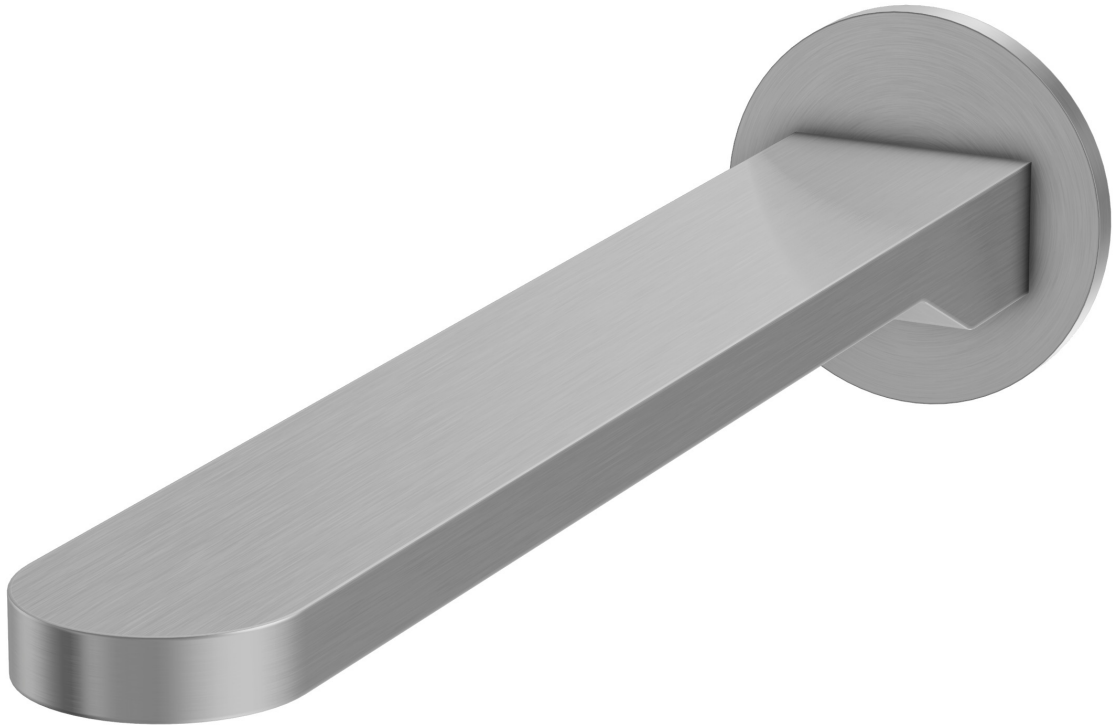

SIMPLE FORM, LASTING IMPRESSION

SERENO BATH SPOUT

AT A GLANCE

BEST FOR

Everyday bathrooms for those who value simplicity with substance.

CONNECTION

G1/2 wall outlet connection.

FEEL


Steady water flow with a clean, minimal wall-mounted profile.

INSTALLATION

Wall-mounted, plumber required.

rainco

Front View · Side View

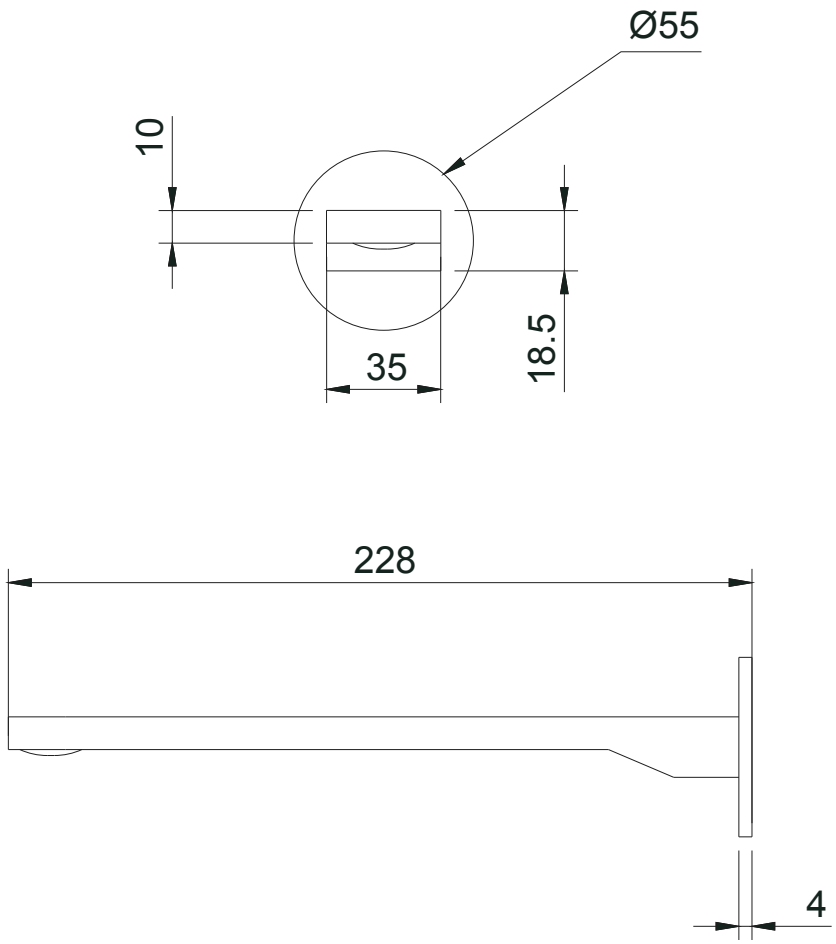

Specifications

MATERIAL

Lead-free **SS304** stainless steel

AERATOR

Neoprel Aerator

FLOW RATE

5 L/min · WELS 5 Star

PRESSURE RANGE

50–800 kPa

TEMPERATURE

4–80 °C

CONNECTIONS

Standard **G1/2”**

MOUNTING


Wall-mounted · cut-out **Ø35-Ø38 mm**

DIMENSIONS

Spout **10 mm** · length **228 mm** · cover ring **Ø55 mm**

rainco

Exploded View

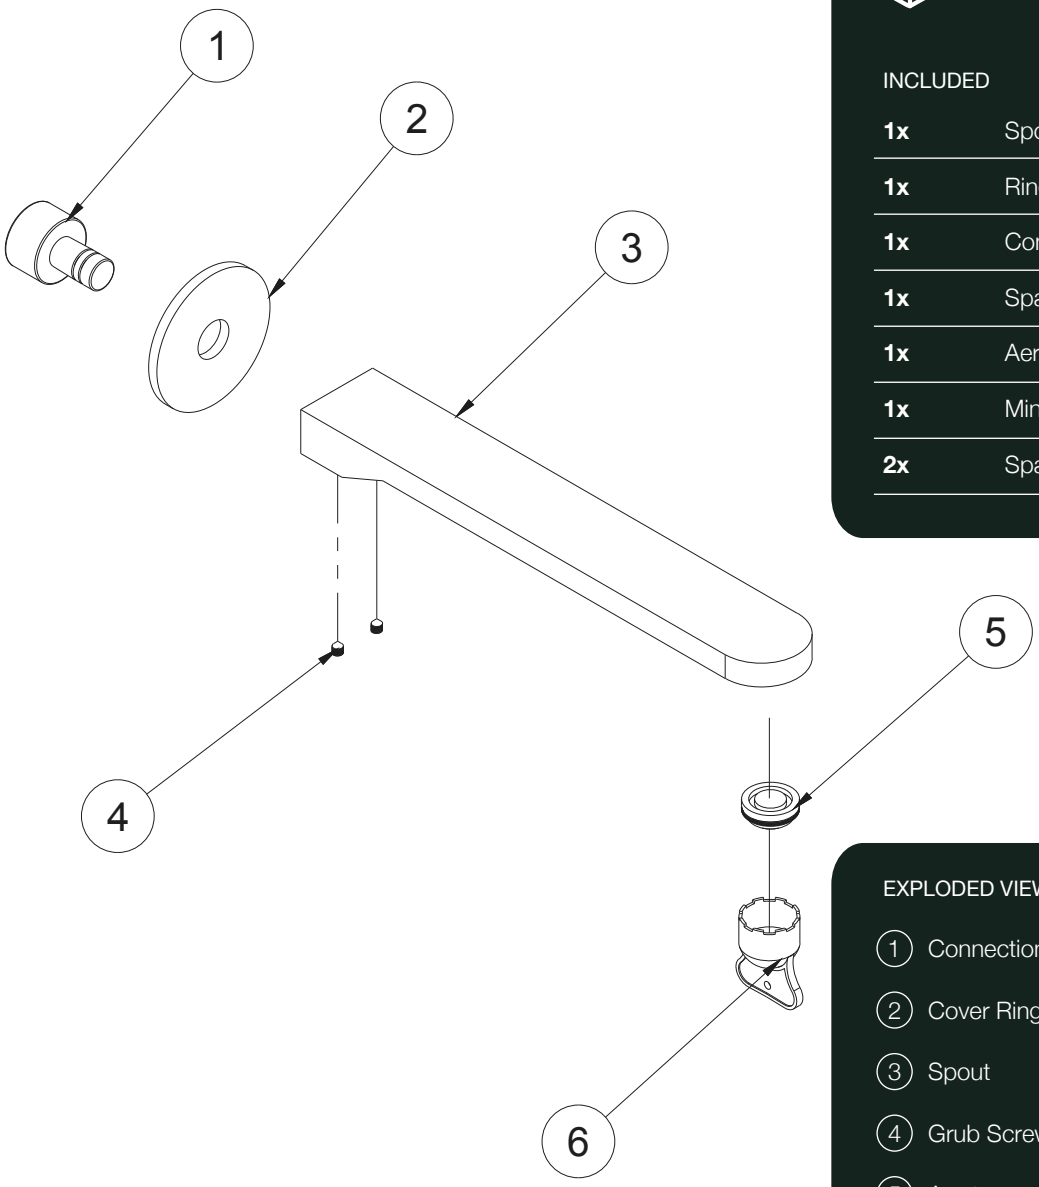

What's in the box

INCLUDED

1x	Spout
1x	Ring
1x	Connection Screw
1x	Spare Aerator
1x	Aerator Remover Tool
1x	Mini Hex Wrench
2x	Spare Grub Screws

EXPLODED VIEW

1. Connection Screw
2. Cover Ring
3. Spout
4. Grub Screws
5. Aerator
6. Aerator Remover Tool

Finish Options


Antique Brass	**Brushed Nickel**	**Brushed Brass**	**Brushed Copper**	**Gun Metal**
AEA	AEA	PVD	PVD	PVD

rainco

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Check wall outlet

Confirm the wall outlet is G1/2 and compatible with the spout connection. Turn off the water supply and flush the pipework to remove debris and impurities.


02



Fit cover plate

Place the cover plate over the wall outlet. Connect the spout inlet to the outlet and tighten securely, ensuring a firm fit against the wall.


03



Attach the spout

Attach the spout body, align it to the desired position and tighten the grub screws / fixing points to secure it in place.

04



Test for leaks

Turn on the water supply and allow water to run through the spout. Check all connections and confirm there are no leaks before sealing or tiling.

FINAL CHECK · TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the spout has been fully tested and confirmed leak-free.

Care & Maintenance

MILD SOAP & WARM WATER

Clean with mild soap and warm water.

SOFT CLOTH ONLY

Use soft cloth only.

NO CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity.

Compliance

WATERMARK CERTIFIED

AS/NZS 3718

WELS APPROVED

5 STAR · 5 L/MIN

NCC LEAD-FREE

LESS THAN 0.25%

INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4