



EFFORTLESS WATER CONTROL

SERENO CONCEALED DIVERTER WALL MIXER

AT A GLANCE



BEST FOR

Everyday bathrooms
and showers






FEEL

Precise switching between a
rain shower and hand shower,
or between a bath spout and
shower



INSTALLATION

Wall-mounted,
plumber required

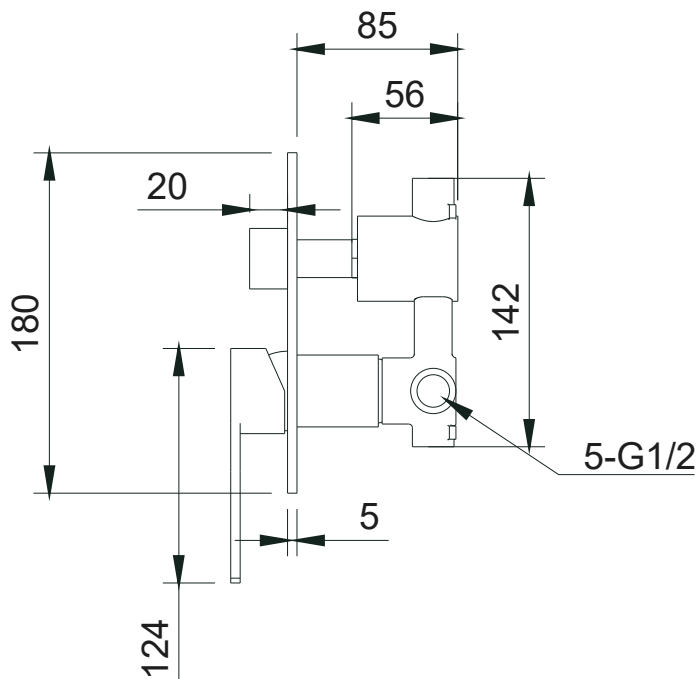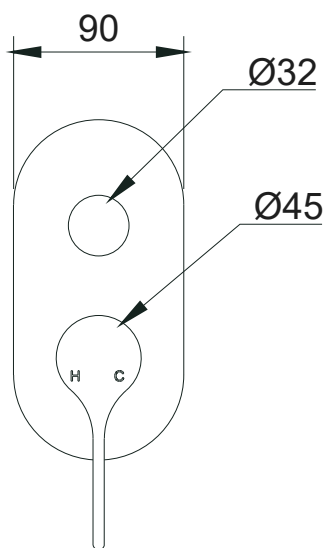

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic cartridge



PRESSURE RANGE

50–800 kPa



CONNECTIONS

Standard **G1/2"**




MOUNTING

Wall-mounted · cut-out **Ø20 mm / Ø45 mm**



DIMENSIONS

Height **180 mm** · Width **90 mm** · In-wal height **142 mm**

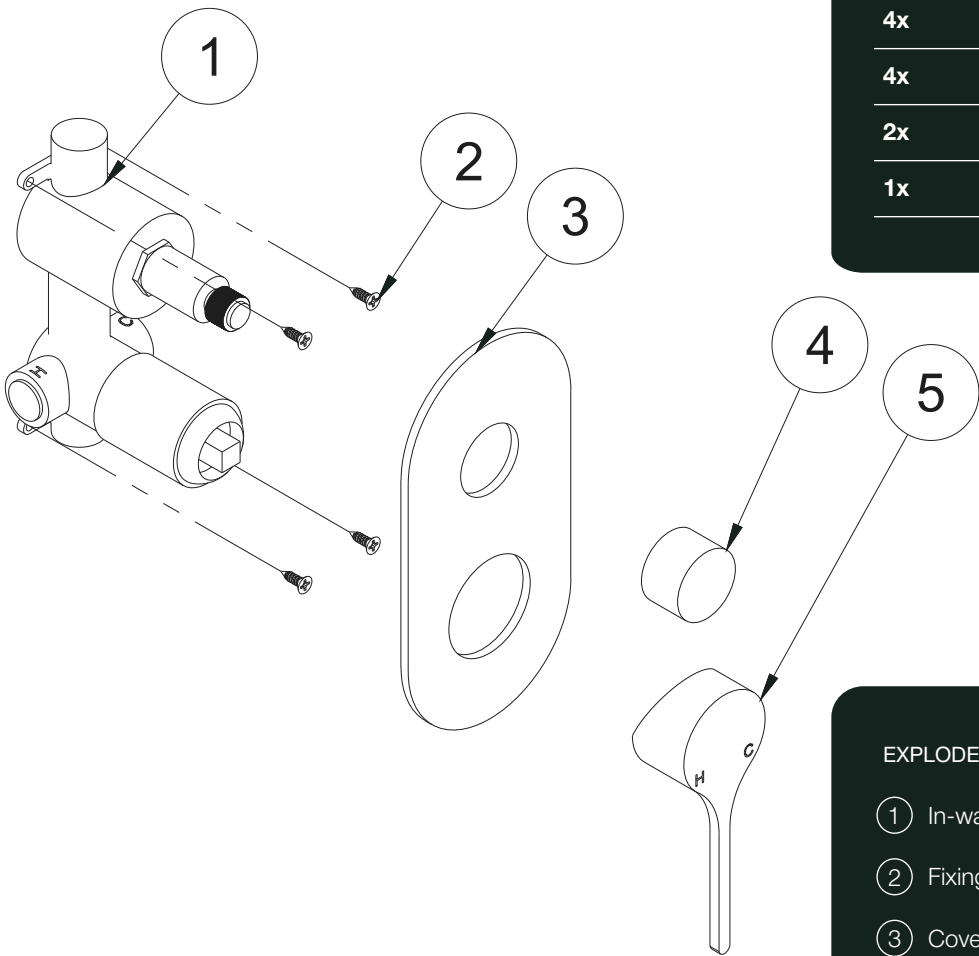

 What's in the box

INCLUDED

- | | |
|----|---------------------|
| 1x | In-wall Body |
| 1x | Tap Handle |
| 1x | Diverter Knob |
| 1x | Cover Plate |
| 4x | Fixing Screws |
| 4x | Hollow Wall Anchors |
| 2x | Spare Grub Screws |
| 1x | Mini Hex Wrench |

EXPLODED VIEW

- | | |
|---|----------------------------|
| ① | In-wall Body |
| ② | Fixing Screws |
| ③ | Cover Plate |
| ④ | Diverter Knob |
| ⑤ | Temperature Control Handle |

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Fit Body

Position the concealed body. Connect hot water on the left and cold water on the right. Keep the protective covers fitted.


02



Installation depth

Set the installation depth to 60–85 mm. Maintain the 68 mm spacing and openings of Ø20 mm and Ø45 mm. Test for leaks before tiling.


03



Complete wall

After testing, complete the wall finish. Fit the cover plate and diverter knob, then secure with the grub screw.

04



Install trim and handle

Fit the control handle, align the hot and cold markings, then secure it underneath with the Allen key.



FINAL CHECK • TURN ON & TEST

Turn on the water supply. Check the hot and cold control, diverter operation and all connections for leaks.

Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean with mild soap and warm water



SOFT CLOTH ONLY

Use soft cloth only



AVOID CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4