



STEADY AND SMOOTH MOVEMENT

SERENO GOOSENECK PULL OUT MIXER

AT A GLANCE



BEST FOR

Everyday kitchens,
family use



HEIGHT

Balanced for
overhead clearance
without dominating
the space





FEEL

Smooth pull-out action
with precise rinsing and
cleaning with 360°
Swivel function



INSTALLATION

Bench-mounted,
plumber required

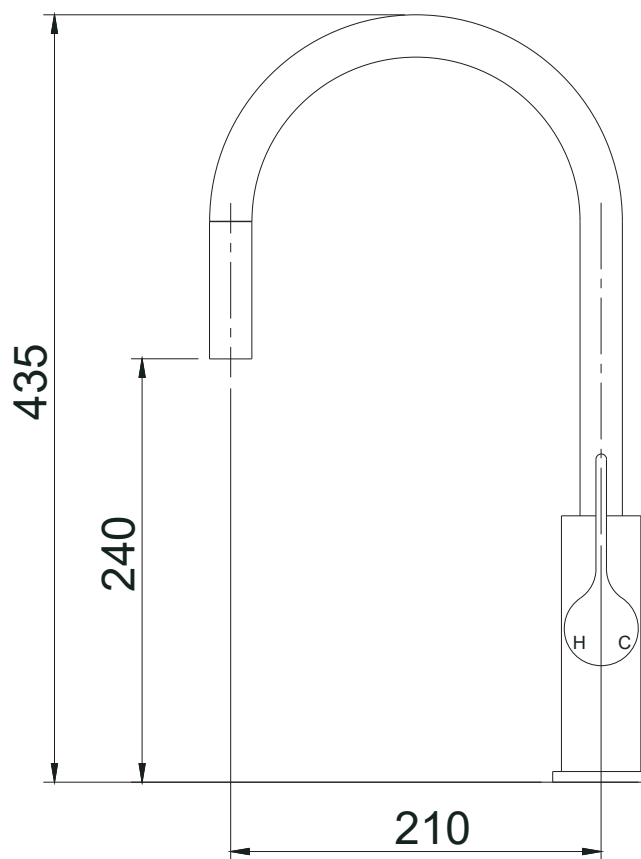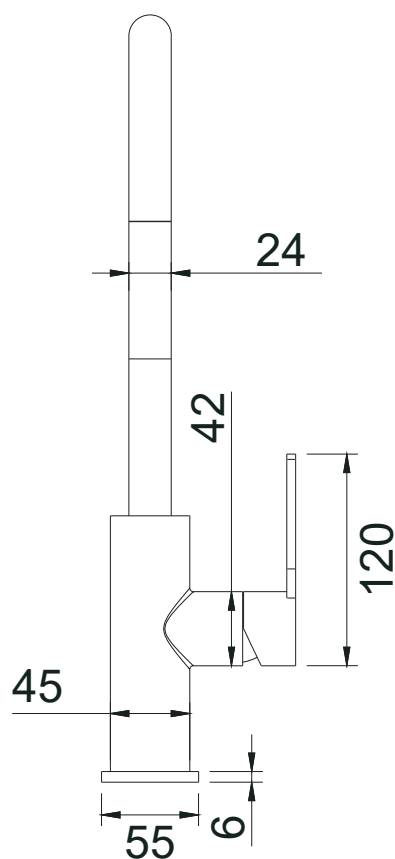

Specifications



MATERIAL

Premium **SS304** stainless steel



CARTRIDGE

Citec ceramic cartridge · **Ø35 mm**



FLOW RATE

6.5 L/min · WELS 4 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Bench-mounted · cut-out **Ø35 mm**



DIMENSIONS

Height **435 mm** · spout **24 mm** · base **Ø45 mm**

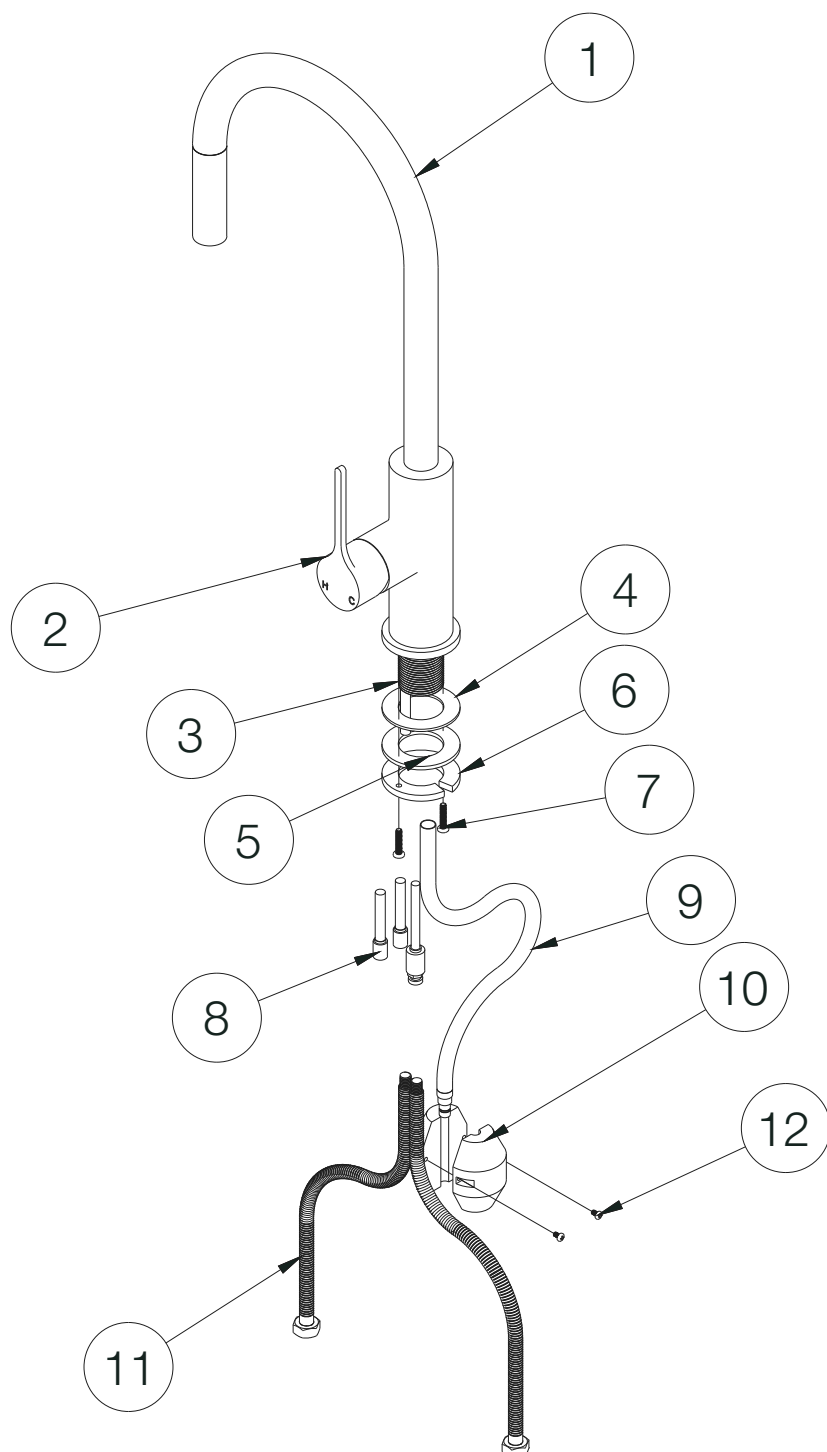

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD



Gun Metal
PVD



What's in the box

INCLUDED

1x	Gooseneck Tap
1x	Weight Ball
1x	Rubber Washer
1x	Washer
1x	Mount Nut
1x	Hot Metal Hose
1x	Cold Metal Hose
2x	Screws
1x	Spare Grub Screw
1x	Mini Hex Wrench


EXPLODED VIEW

- ① Gooseneck Tap
- ② Temperature Control Handle
- ③ Thread Tube
- ④ Rubber
- ⑤ Washer
- ⑥ Mount Nut
- ⑦ Fixing Screws
- ⑧ Temperature Connection
- ⑨ Pull-down Hose
- ⑩ Weight Ball
- ⑪ Flexi Hose
- ⑫ Screws

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

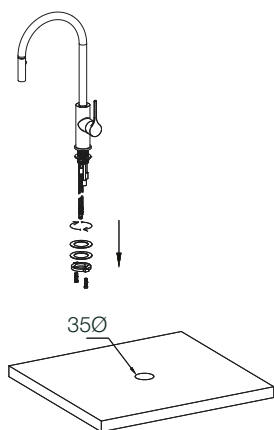

Prepare the Mixer

Prepare all accessories. Identify the hot and cold hoses. Install one hose at a time if required.


02

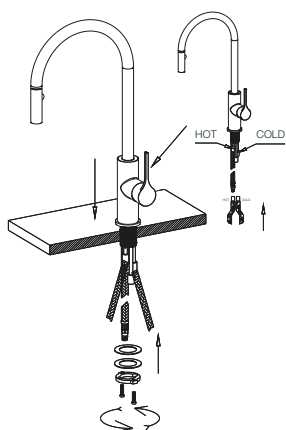

Insert Mixer

Feed the hoses through the benchtop. Position the mixer into the Ø35mm cut-out and align correctly.


03

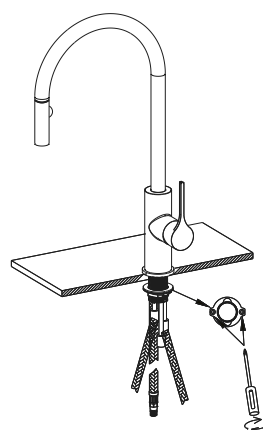

Secure Mixer

From underneath, fit the washers and mounting hardware. Ensure the mixer is straight before final tightening.

04

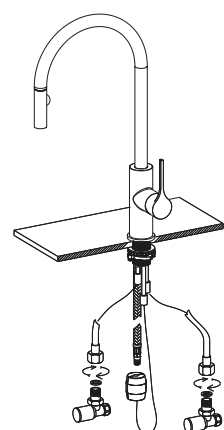

Connect Water

Connect hoses to the isolation valves: Hot to Hot, Cold to Cold. Do not twist the hoses.



FINAL CHECK - TURN ON & TEST

Slowly open the isolation valves. Check all joints for leaks. Run hot and cold water and test flow, pressure, handle operation and pull-down function. Do not seal, tile or complete installation until the mixer has been fully tested.

Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These damage the finish and shorten its life.

Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

4 STAR · 6.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4