



REFINED FUNCTION, ENDURING BEAUTY

SERENO LAUNDRY PULL OUT MIXER

AT A GLANCE



BEST FOR

Everyday laundry
use



HEIGHT

Balanced for overhead
clearance without
dominating the space





FEEL

Smooth pull-out action
with precise rinsing and
cleaning with 360°
swivel function



INSTALLATION

Bench-mounted,
plumber required

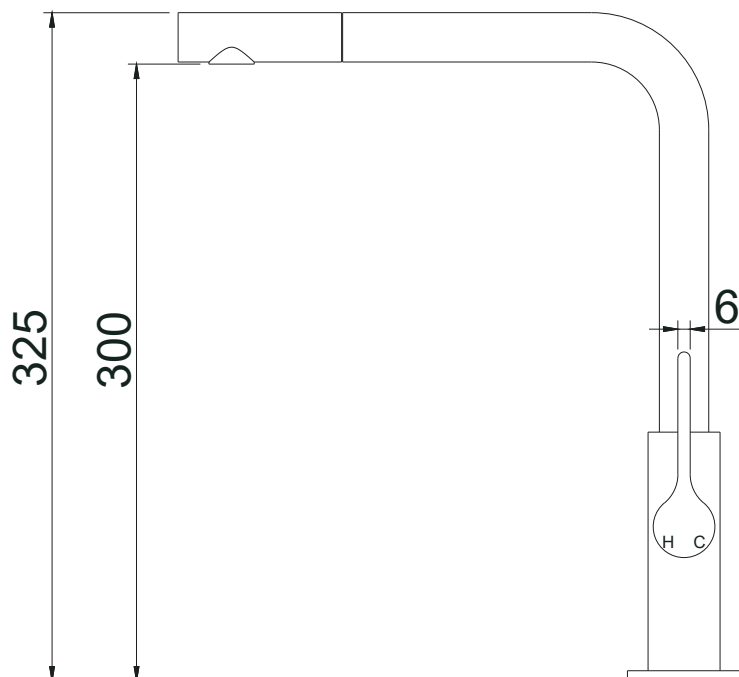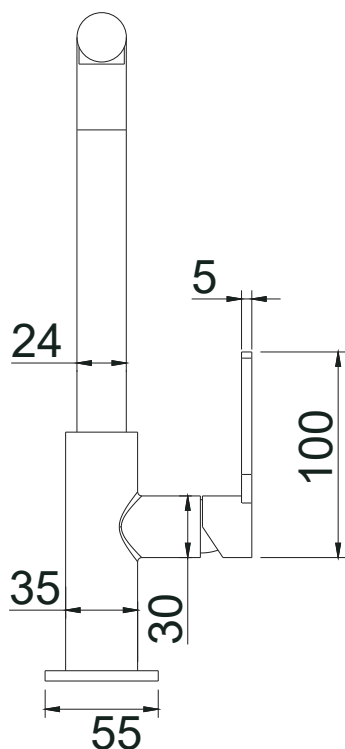

Specifications



MATERIAL

Premium **SS304** stainless steel



CARTRIDGE

Citec ceramic · **Ø35 mm**



FLOW RATE

4.5 L/min · WELS 6 Star



PRESSURE RANGE

50–800 kPa



TEMPERATURE

4–80 °C



CONNECTIONS

Standard **G1/2"**




MOUNTING

Bench-mounted



DIMENSIONS

Height **325 mm** · Spout **Ø24 mm** · Base **35 mm**

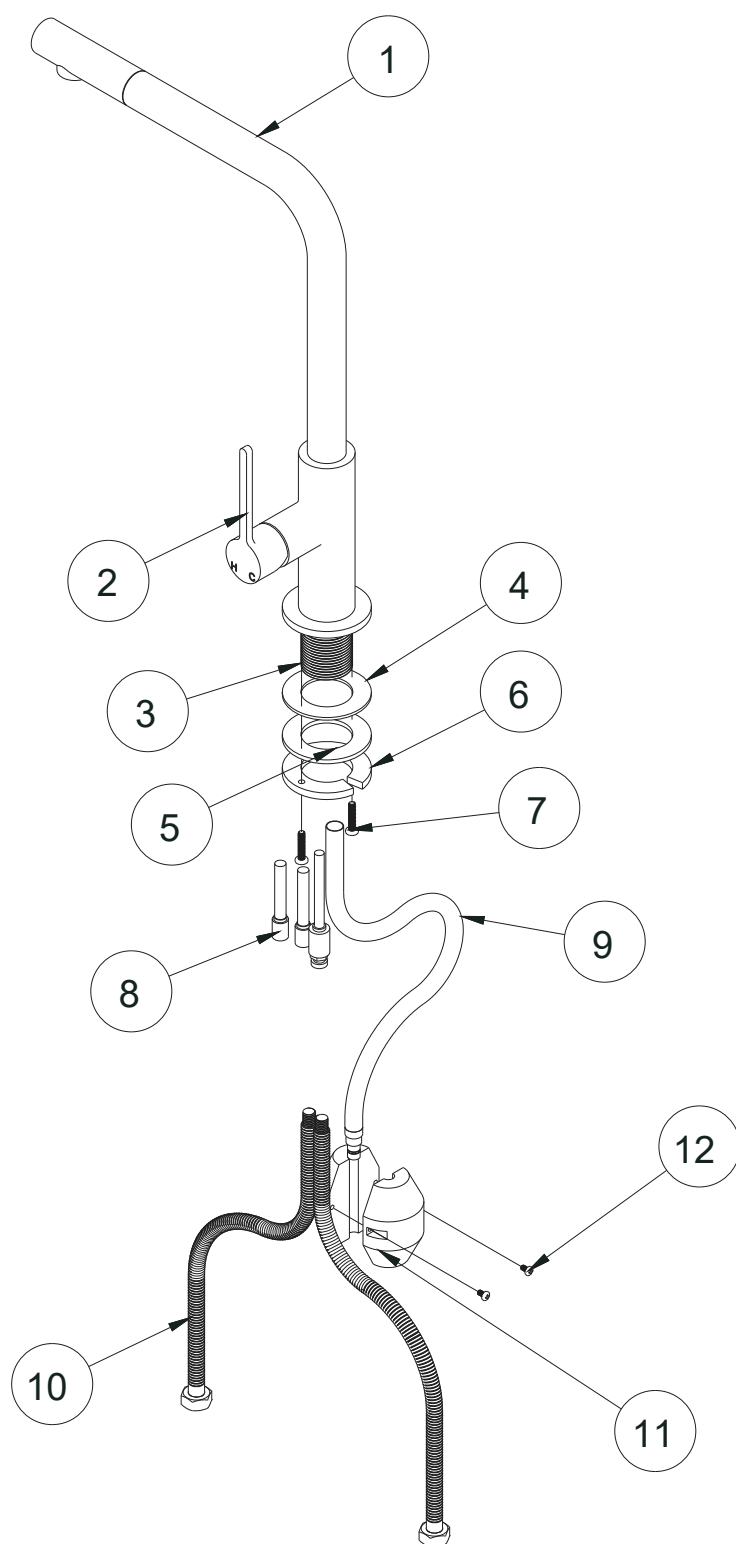

What's in the box

INCLUDED

1x	Laundry Tap
1x	Weight Ball
1x	Rubber Washer
1x	Washer
1x	Mount Nut
1x	Hot Metal Hose
1x	Cold Metal Hose
2x	Screws
1x	Spare Grub Screw
1x	Aerator Remover Tool

EXPLODED VIEW

- ① Laundry Tap
- ② Temperature Control Handle
- ③ Thread Tube
- ④ Rubber
- ⑤ Washer
- ⑥ Mount Nut
- ⑦ Fixing Screws
- ⑧ Temperature Connection
- ⑨ Pull-Out Hose
- ⑩ Flexir Hose
- ⑪ Weight Ball
- ⑫ Screws

Finish Options



Antique Brass
AEA



Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01

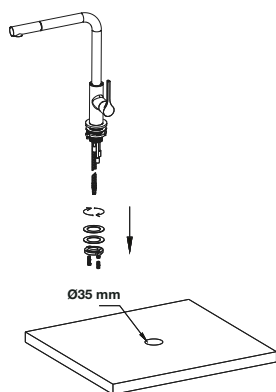

Position Mixer Body

Place the mixer body in position and mark the required cut-out area.


02

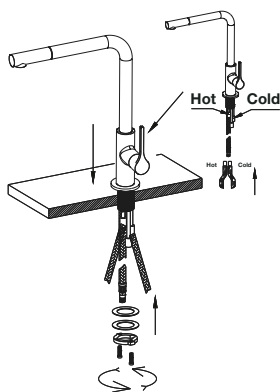

Connect Hoses

Remove the body and connect the hot (red) and cold (blue) hoses to the correct inlets.


03

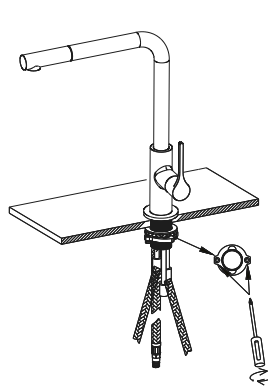

Reinstall / Connect Water

Reinstall the mixer body and connect the hoses to the water supply. Turn on the water and check for leaks. Tighten if needed.

04

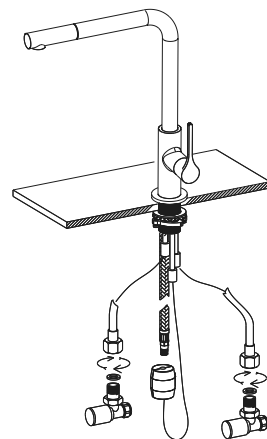

Attach Hand Shower

Connect the hand shower to the mixer body.



FINAL CHECK · TURN ON & TEST

Turn on the mixer and check that everything is working properly with no leaks.

Care & Maintenance



MILD SOAP & WARM WATER

Clean gently to keep the surface bright.



SOFT CLOTH ONLY

Never use scourers or rough pads.



NO CITRUS, BLEACH OR ABRASIVES

These can damage the surface and affect longevity.

Compliance



WATERMARK CERTIFIED

AS/NZS 3718



WELS APPROVED

6 STAR · 4.5 L/MIN



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4