



EFFORTLESS WATER CONTROL

SERENO MINIMAL DIVERTER WALL MIXER

AT A GLANCE



BEST FOR

Everyday bathroom
and shower






FEEL

Precise switching
between a rain shower
and hand wand, or bath
spout and shower



INSTALLATION

Wall-mounted,
plumber required

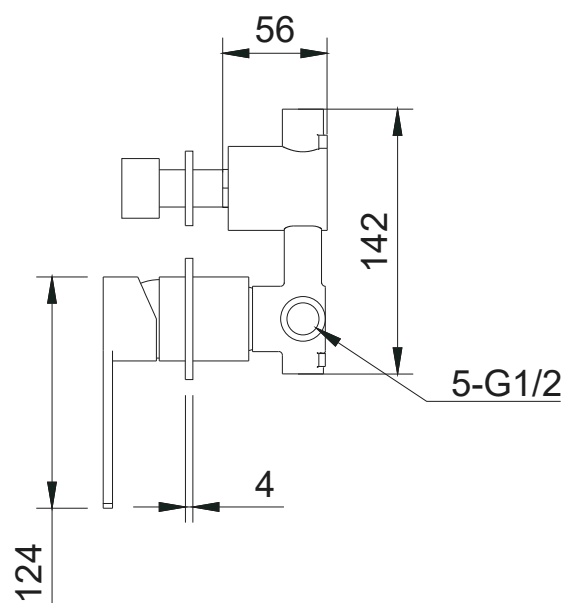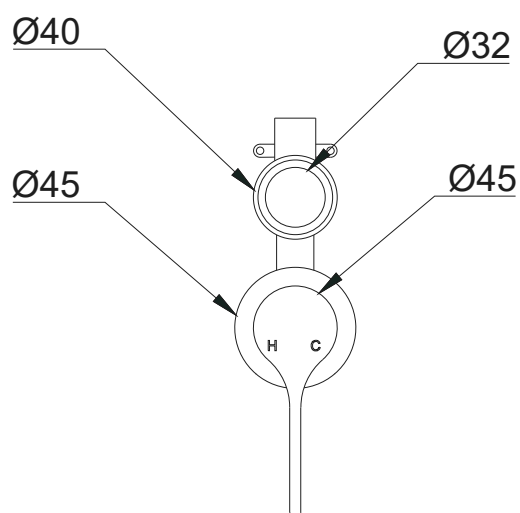

Specifications



MATERIAL

Lead-free **SS304** stainless steel



CARTRIDGE

Citec ceramic cartridge · **$\varnothing 35$ mm**



PRESSURE RANGE

50–800 kPa



CONNECTIONS

Standard **G1/2"**




MOUNTING

Wall-mounted · cut-out **$\varnothing 20$ mm, $\varnothing 45$ mm**



DIMENSIONS

Ring thickness **4 mm** · In-wall height **142 mm** ·
Handle length **124 mm**

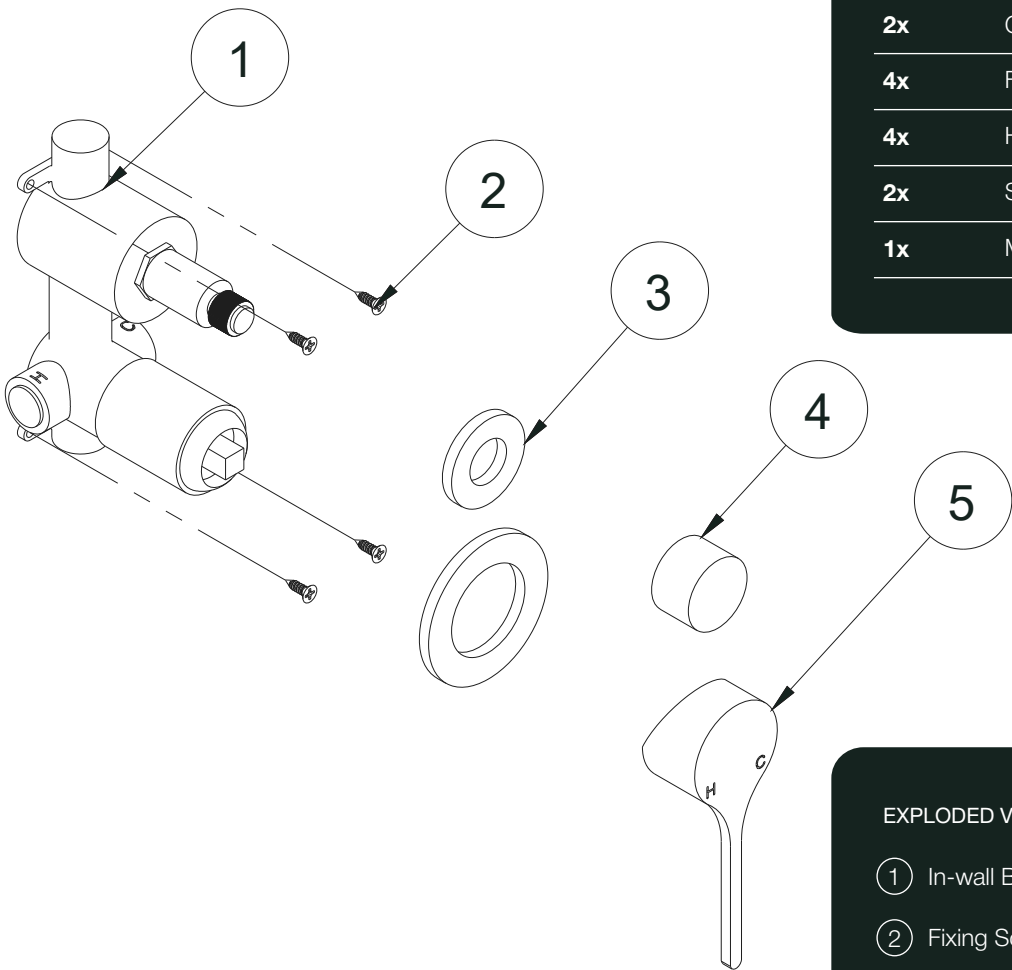

 What's in the box

INCLUDED

1x	In-wall Body
1x	Tap Handle
1x	Diverter Knob
2x	Cover Rings
4x	Fixing Screws
4x	Hollow Wall Anchors
2x	Spare Grub Screws
1x	Mini Hex Wrench

EXPLODED VIEW

- ① In-wall Body
- ② Fixing Screws
- ③ Cover Rings
- ④ Diverter Knob
- ⑤ Temperature Control Handle

Finish Options



Antique Brass
AEA




Brushed Nickel
AEA



Brushed Brass
PVD



Brushed Copper
PVD




Gun Metal
PVD

Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



Prepare pipework

Flush the pipework before installation to remove debris and impurities. Position the in-wall body and connect the hot and cold pipework.


02

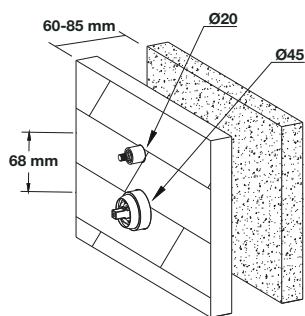

Check depth

Refer to the required opening sizes and embedding depth before completing the wall finish. Allow Ø20 mm and Ø45 mm cut-outs, with an embedding depth of 60–85 mm.


03

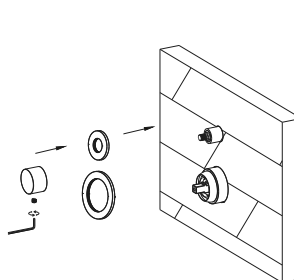

Install cover rings

After testing and completing the wall finish, attach the cover rings and diverter knob as shown.

04

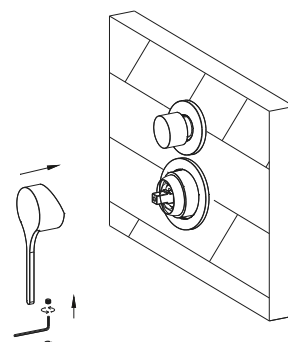

Install handle

Attach the temperature control handle and secure it using the grub screw with the mini hex wrench / Allen key.



FINAL CHECK • TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean with mild soap and warm water



SOFT CLOTH ONLY

Use soft cloth only



AVOID CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4