



EFFORTLESS WATER CONTROL

## SERENO MINIMAL DIVERTER WALL MIXER

AT A GLANCE



BEST FOR

Everyday bathroom  
and shower






FEEL

Precise switching  
between a rain shower  
and hand wand, or bath  
spout and shower



INSTALLATION

Wall-mounted,  
plumber required

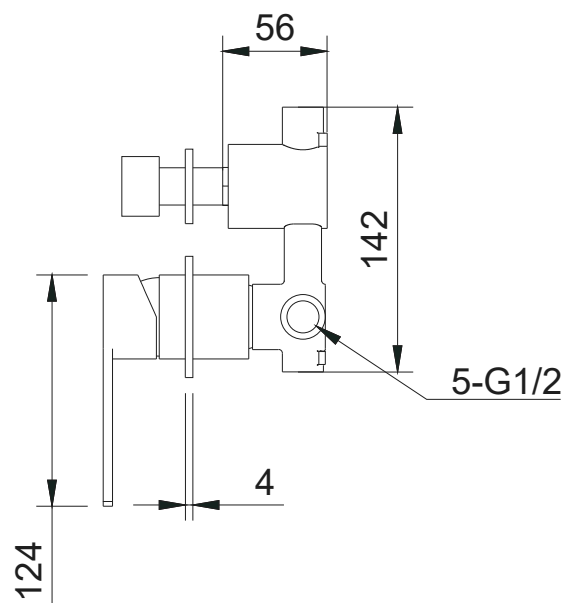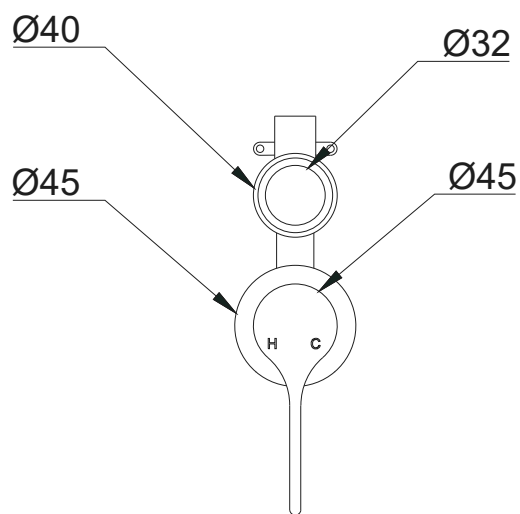

## Specifications



### MATERIAL

Lead-free **SS304** stainless steel



### CARTRIDGE

Citec ceramic cartridge · **Ø35 mm**



### PRESSURE RANGE

**50–800 kPa**



### CONNECTIONS

Standard **G1/2"**




### MOUNTING

Wall-mounted · cut-out **Ø20 mm, Ø45 mm**



### DIMENSIONS

Ring thickness **4 mm** · In-wall height **142 mm** ·  
Handle length **124 mm**

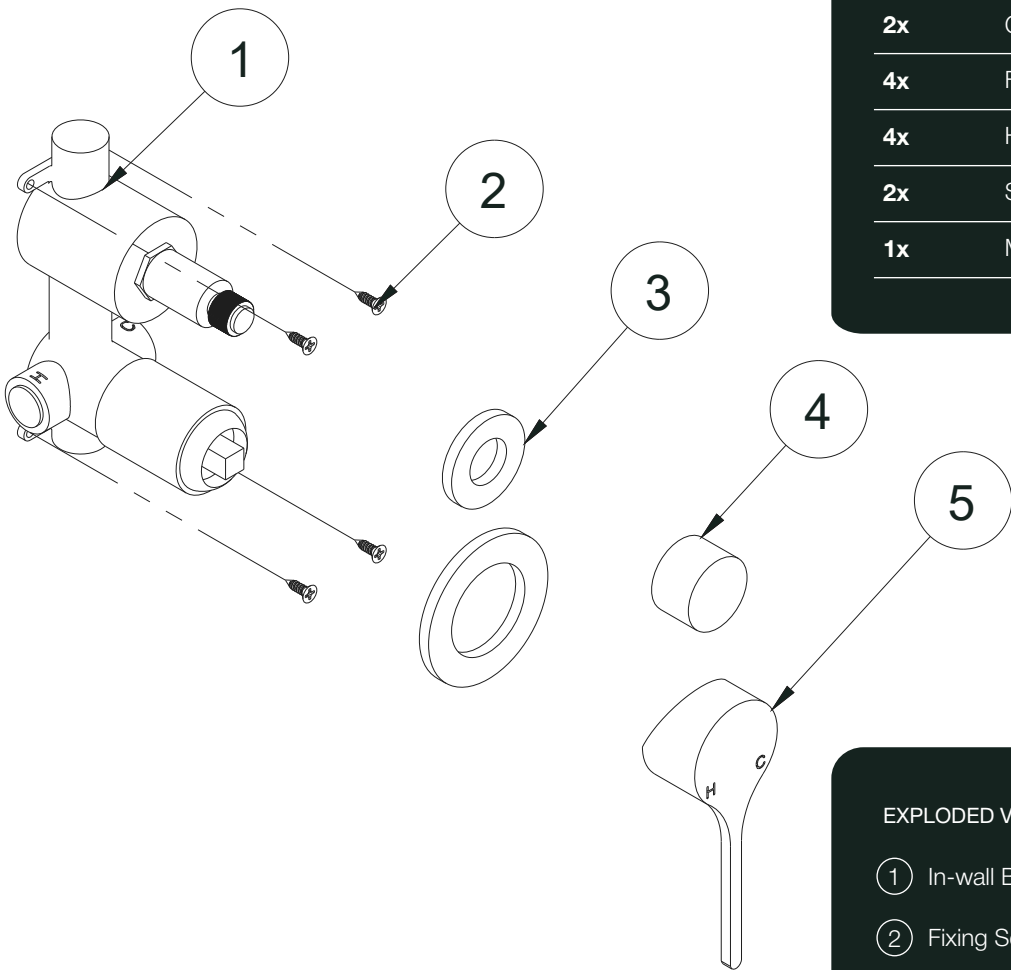

 What's in the box

INCLUDED

|    |                     |
|----|---------------------|
| 1x | In-wall Body        |
| 1x | Tap Handle          |
| 1x | Diverter Knob       |
| 2x | Cover Rings         |
| 4x | Fixing Screws       |
| 4x | Hollow Wall Anchors |
| 2x | Spare Grub Screws   |
| 1x | Mini Hex Wrench     |

EXPLODED VIEW

- ① In-wall Body
- ② Fixing Screws
- ③ Cover Rings
- ④ Diverter Knob
- ⑤ Temperature Control Handle


Finish Options

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Antique Brass<br>AEA                                                               | Brushed Nickel<br>AEA                                                               | Brushed Brass<br>PVD                                                                | Brushed Copper<br>PVD                                                                | Gun Metal<br>PVD                                                                      |

## Installation Guide

PLUMBER REQUIRED AS/NZS 3500


01



### Prepare pipework

Flush the pipework before installation to remove debris and impurities. Position the in-wall body and connect the hot and cold pipework.


02



### Check depth

Refer to the required opening sizes and embedding depth before completing the wall finish. Allow Ø20 mm and Ø45 mm cut-outs, with an embedding depth of 60–85 mm.


03

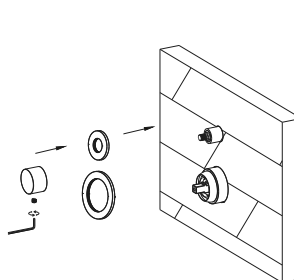

### Install cover rings

After testing and completing the wall finish, attach the cover rings and diverter knob as shown.

04

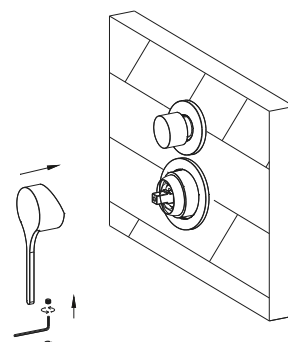

### Install handle

Attach the temperature control handle and secure it using the grub screw with the mini hex wrench / Allen key.



### FINAL CHECK • TURN ON & TEST

Turn on the water supply and test for correct operation and leaks. Do not seal or tile until the tap is fully tested.

## Care & Maintenance

KEEP THE FINISH



MILD SOAP & WARM WATER

Clean with mild soap and warm water



SOFT CLOTH ONLY

Use soft cloth only



AVOID CITRUS, BLEACH OR ABRASIVE CLEANERS

These can damage the surface and affect longevity

## Compliance

CERTIFIED



WATERMARK CERTIFIED

AS/NZS 3718



NCC LEAD-FREE

LESS THAN 0.25%



INSTALLATION STANDARD

AS/NZS 3500.1 & 3500.4